

LV circuit breakers

EasyPact from 15 A to 400 A

Catalogue
2007



Presentation

6

Circuit breakers

9

Installation guide

47

Busbars

71

The Guiding System, the new way to create your electrical installations

A comprehensive offer of products with consistent design

The Guiding System is first and foremost a Merlin Gerin product offer covering all electrical distribution needs. However, what makes all the difference is that these products have been designed to operate together: mechanical and electrical compatibility, interoperability, modularity, communication. Thus the electrical installation is both optimised and more efficient: better continuity of supply, enhanced safety for people and equipment, guaranteed upgradeability, effective monitoring and control.

Tools to simplify design and implementation

With the Guiding System, you have a comprehensive range of tools - the Guiding Tools - that will help you increase your product knowledge and product utilisation. Of course this is in compliance with current standards and procedures. These tools include technical booklets and guides, design aid software, training courses, etc. and are regularly updated.

The Guiding System, combined with the know-how and creativity, allows optimised, reliable, open-ended and standard compliant installations

For a genuine partnership with you

Because each electrical installation is unique, there is no standard solution. With the Guiding System, the variety of combinations allows for genuine customisation solutions. You can create and implement electrical installations to meet your creative requirements and design knowledge. You and Merlin Gerin's Guiding System form a genuine partnership.

**For more details on the Guiding System,
consult www.merlin-gerin.com**

A consistent design of offers from Medium Voltage to Low Voltage



Discrimination guarantees co-ordination between the operating characteristics of serial-connected circuit-breakers. Should a fault occurs downstream, only the circuit-breaker placed immediately upstream from the fault will trip.

All Merlin Gerin offers are designed according to electrical, mechanical and communication consistency rules.


The products express this consistency by their overall design and shared ergonomics.

Electrical consistency:

Each product complies with or enhances system performance at co-ordination level: breaking capacity, I_{sc} , temperature rise, etc. for more safety, continuity of supply (discrimination) or economic optimisation (cascading).

The leading edge technologies employed in Merlin Gerin's Guiding System ensure high performance levels in discrimination and cascading of protection devices, electrodynamic withstand of switches and current distributors, heat loss of devices, distribution blocks and enclosures.

Likewise, inter-product ElectroMagnetic Compatibility (EMC) is guaranteed.

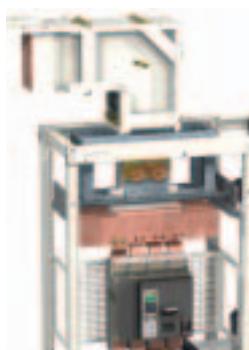

Direct connection of the Canalis KT busbar trunking on the Masterpact 3200 A circuit breaker.

Transparent Ready

Thanks to the use of standard Web technologies, you can offer your customers intelligent Merlin Gerin switchboards allowing easy access to information: follow-up of currents, voltages, powers, consumption history, etc.

Mechanical consistency:

Each product adopts dimensional standards simplifying and optimising its use within the system.

It shares the same accessories and auxiliaries and complies with global ergonomic choices (utilisation mode, operating mode, setting and configuration devices, tools, etc.) making its installation and operation within the system a simpler process.

Communication consistency:

Each product complies with global choices in terms of communication protocols (Modbus, Ethernet, etc.) for simplified integration in the management, supervision and monitoring systems.

Guiding Tools for more efficient design and implementation of your installations.

SM6

Medium voltage switchboard system from 1 to 36 kV



Sepam

Protection relays



Masterpact

Protection switchgear from 100 to 6300 A



Trihal

MV/LV dry cast resin transformer from 160 to 5000 kVA

Evolis

MV vacuum switchgear and components from 1 to 24 kV.

The Technical guide

These technical guides help you comply with installation standards and rules i.e.: The electrical installation guide, the protection guide, the switchboard implementation guide, the technical booklets and the co-ordination tables all form genuine reference tools for the design of high-performance electrical installations. For example, the LV protection co-ordination guide - discrimination and cascading - optimises choice of protection and connection devices while also increasing markedly continuity of supply in the installations.



CAD software and tools

The CAD software and tools enhance productivity and safety. They help you create your installations by simplifying product choice through easy browsing in the Guiding System offers. Last but not least, they optimise use of our products while also complying with standards and proper procedures.



Compact, Easypact


Protection switchgear system from 100 to 630 A

Multi 9

Modular protection switchgear system up to 125 A

Prisma Plus

Functional system for electrical distribution switchboards up to 3200 A

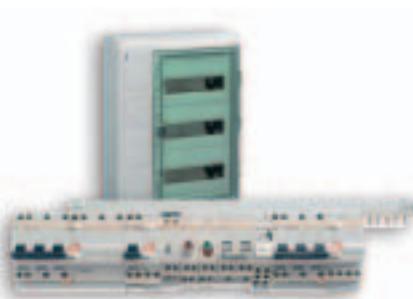

Pragma
Enclosures for distribution switchboards up to 160 A

Canalis
Prefabricated Busbar Trunking from 25 to 4000 A

PowerLogic
Power management

Training

Training allows you to acquire the Merlin Gerin expertise (installation design, work with power on, etc.) for increased efficiency and a guarantee of improved customer service.

The training catalogue includes beginner's courses in electrical distribution, knowledge of MV and LV switchgear, operation and maintenance of installations, design of LV installations to give but a few examples.



merlin-gerin.com

This international site allows you to access all the Merlin Gerin products in just 2 clicks via comprehensive range data-sheets, with direct links to:

- complete library: technical documents, catalogs, FAQs, brochures...
- selection guides from the e-catalog
- product discovery sites and their Flash animations.

You will also find illustrated overviews, news to which you can subscribe, the list of country contacts...




EasyPact™

*Follow the way
to simplicity*




With only three sizes of circuit breakers, the *EasyPact* system is the simple and universal solution to fit all the needs in terms of low voltage protection.

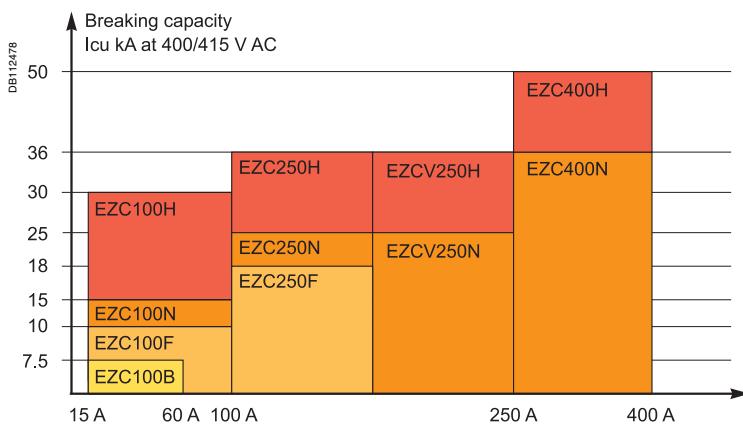

**EasyPact range complies to
worldwide standards**

- IEC 60947-2
- EN 60947-2
- JIS C8201-2-1/C8201-2-2 (annex 1 and 2)
- GB 14048.2
- Nema-AB1
- UL508
- CSA22-2
- IACS for Merchant Marine.
(International Association of Classification Societies: Veritas, Germanischer Lloyd's, Rina, USSR, Lloyd's Register).

**with international certifications
and approvals
by independent Laboratories**
ASEFA, KEMA, TILVA, TÜV, UL.

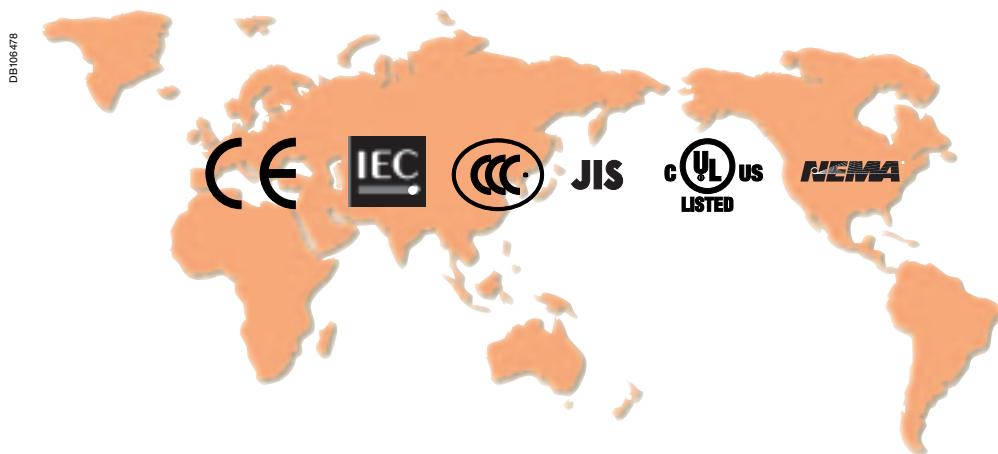

PB101848-28



EZC250.

PB101851-28



EZCV250.

Easy to choose


EasyPact brings you easy solutions

- From 15 A to 400 A
- Up to 50 kA at 415 V
- In only three frame sizes
- With a complete range of auxiliaries and accessories

Easy to install

- Fixed front mounting
- Front connections
- Bare cables connected through cable lugs, screwed inside the breaker.
- Field-installable auxiliaries and accessories
- Built-in earth-leakage protection
- Interchangeable MCCB and ELCB

DB112479

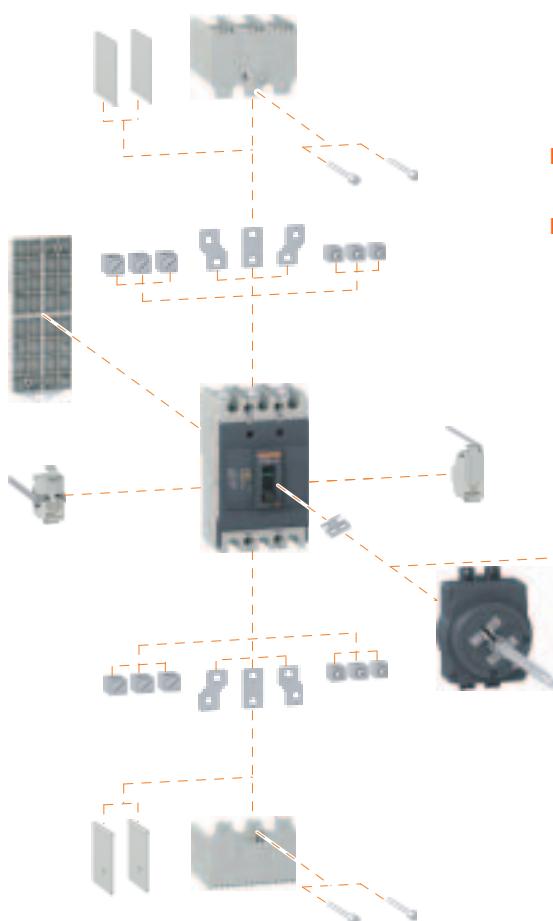

Easy to use

- A thermal calibration suitable for MCCB use at 50°C without derating
- Positive contact indication for safety and reliability
(no risk for maintenance: when green flag is visible, main contacts of the breakers are effectively opened, and not welded).

DB106492



Guiding

TOOLS

merlin-gerin.com

This international site allows you to access all the Merlin Gerin products in just 2 clicks via comprehensive range data-sheets, with direct links to:


- complete library: technical documents, catalogs, FAQs, brochures...
- selection guides from the e-catalog.
- product discovery sites and their Flash animations.

You will also find illustrated overviews, news to which you can subscribe, the list of country contacts...




The technical guide

These technical guides help you comply with installation standards and rules i.e.: the electrical installation guide, the protection guide, the switchboard implementation guide, the technical booklets and the co-ordination tables all form genuine reference tools for the design of high performance electrical installations. For example, the LV protection co-ordination guide - discrimination and cascading - optimises choice of protection and connection devices while also increasing markedly continuity of supply in the installations.



General characteristics	10
Selection table	14
Catalogue numbers	18
EZC100B 7.5 kA (400 V AC)	18
EZC100F 10 kA (400 V AC)	19
EZC100N 15 kA (400 V AC)	20
EZC100H 30 kA (400 V AC)	21
EZC250F 18 kA (400 V AC)	22
EZC250N 25 kA (400 V AC)	23
EZC250H 36 kA (400 V AC)	23
EZC250N 25 kA (400 V AC)	24
EZC250H 36 kA (400 V AC)	24
EZCV250N 25 kA (400 V AC)	25
EZCV250H 36 kA (400 V AC)	25
EZC400N 36 kA (400 V AC)	26
EZC400H 50 kA (400 V AC)	26
Electrical and mechanical accessories overview	26
EasyPact EZC100	26
EasyPact EZC250	27
EasyPact EZCV250	28
EasyPact EZC400	29
Electrical auxiliaries 100-250AF	30
AX - AL - AXAL - ALV	30
SHT - UVR - UVRN	32
SHT - UVR - UVRN (cont.)	33
Direct rotary handle 100-250AF	34
Extended rotary handle 100-250AF	35
Power connections and cable lugs 100-250AF	36
Power connections and insulation of live parts 100-250AF	37
DIN rail adaptor, padlocking, sealing screws 100-250AF	38
Electrical auxiliaries 400AF	40
AX - AL	40
SHT - UVR	41
Direct rotary handle 400AF	42
Extended rotary handle 400AF	43
Power connections, cable lugs, spreaders and extensions 400AF	44
Insulation of live parts and padlocking 400AF	45
<i>Installation guide</i>	47
<i>Busbars</i>	71

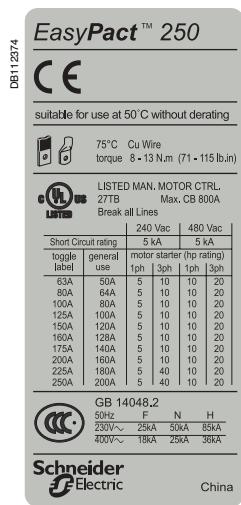

Standardised characteristics indicated on the rating plate:

Ui: rated insulation voltage

Uimp: rated impulse withstand voltage

Icu: ultimate breaking capacity, for various values of the rated operational voltage *Ue*

Cat: utilisation category

Ics: service breaking capacity suitable for isolation

Compliance with standards

EasyPact circuit breakers and auxiliaries comply with the following international standards:

- IEC 60947-1 - general rules
- IEC 60947-2 - low-voltage switchgear and controlgear, part 2 (circuit breakers)
- European (EN 60947-1 and EN 60947-2) and the corresponding national standards
- GB 14048.2
- JIS C8201-2-1 Annex 1 and Annex 2, for molded case circuit breakers
- JIS C8201-2-2 Annex 1 and Annex 2, for earth-leakage circuit breakers
- NEMA-AB1 (High Interrupting Capacity): American standard
- UL508/CSA 22-2 no. 14.

Approvals and Certifications

■ IEC certification by independent laboratories (ASEFA, KEMA, TÜV)

■ CE marking

■ CCC certified by third party Tilva

■ UL LISTED certified by third party Underwriter Laboratories as a "Manual Motor Controller" (EZC250/EZCV250/EZC400).

Vibration and shock withstand test

EasyPact circuit breakers resist mechanical vibrations and shocks.

Tests are carried out in compliance with standard IEC 60068-2-6 for the levels required by merchant-marine inspection organisation IACS: International Association of Classification Societies (Veritas, Germanisches Lloyd's, Rina, USSR, Lloyd's Register):

- 2 to 13.2 Hz: amplitude ± 1 mm
- 13.2 to 100 Hz: acceleration 0.7g.

Pollution degree

EasyPact circuit breakers are certified for operation in pollution-degree III environments as defined by IEC standard 60947 (industrial environments).

Tropicalisation

EasyPact circuit breakers have successfully passed the tests prescribed by the following standards for extreme atmospheric conditions:

- IEC 60068-2-1 - dry cold (-55 °C)
- IEC 60068-2-2 - dry heat (+85 °C)
- IEC 60068-2-30 - damp heat (95 % relative humidity at 55 °C)
- IEC 60068-2-52 - salt mist (severity level 2).

Positive contact indication

All EasyPact circuit breakers are suitable for isolation as defined in IEC standard 60947-2:

- the isolation position corresponds to the O (OFF) position
- the operating handle cannot indicate the O (OFF) position ("green colour" visible) unless the contacts are effectively open
- padlocks may not be installed unless the contacts are open
- installation of a rotary handle does not alter the reliability of the position-indication system.


The isolation function is certified by tests guaranteeing:

- the mechanical reliability of the position indication system
- the absence of leakage currents
- overvoltage withstand capacity between upstream and downstream connections.




Environmental protection

EasyPact circuit breakers take into account important concerns for environmental protection. Most components are recyclable and the parts are marked as specified in applicable standards.

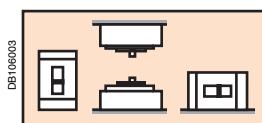

Installation positions.



Reverse feeding.

Ambient temperature

- EasyPact circuit breakers have been particularly designed to hold 100 % In at 50°C without tripping in normal condition (except for earth-leakage circuit breakers).
- EasyPact circuit breakers may be used between -25 °C and +70 °C.
- The permissible storage-temperature range for EasyPact circuit breakers in the original packing is -35 °C to +85 °C.

Installation

EasyPact circuit breakers are designed for easy installation in the various types of switchboards. They may be mounted vertically, horizontally or flat on their back without any derating of characteristics.

Power supply

EasyPact circuit breaker can be supplied from either the top or the bottom (reverse feeding) without any reduction in performance. For earth-leakage circuit breakers, reverse feeding is possible only up to 240 V AC. This capability facilitates connection when installed in a switchboard.

Degree of protection

As per standards IEC 60529 (IP degree of protection) and EN 50102 (IK degree of protection against external mechanical impacts).

Bare circuit breaker with terminal shields


DB106013		With toggle	IP20	IK07
DB106014		With direct rotary handle standard	IP40	IK07

Circuit breaker installed in a switchboard

DB106015		With toggle	IP40	IK07
DB106035		With direct rotary handle standard/VDE MCC	IP54	IK07
DB106016		With extended rotary handle	IP54	IK08



PB101851-37

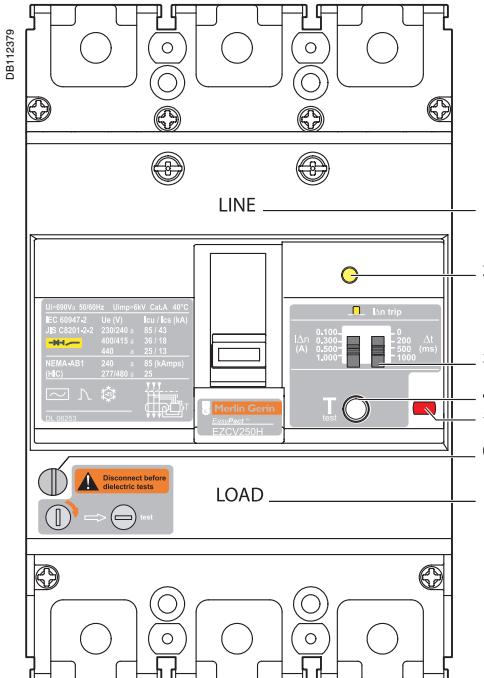

- 1 Line-Load ($U_e > 300 \text{ V AC}$)
- 2 Mechanical indicator
- 3 Adjustable settings $I_{\Delta n}$ and time delay
- 4 ELCB test button
- 5 Push to trip button (MCCB)
- 6 Dielectric tests: disconnecting switch

Earth-leakage protection

EasyPact circuit breakers have a specific version including earth-leakage protection. This protection is fully integrated inside the breaker and does not require any additional space.

EasyPact circuit breakers and earth-leakage circuit breakers are fully interchangeable.

Compliance with standards

EasyPact earth-leakage circuit breakers comply with all the international standards listed page 10 :

- IEC 60947-1
- IEC 60947-2
- EN 60947-1
- EN 60947-2
- GB 14048.2
- JIS C8201-2-2 Annex 1 and Annex 2
- NEMA-AB1 (High Interrupting Capacity)
- UL508/CSA 22-2 no. 14.

They also comply with:

- VDE 664, operation down to -25 °C
- IEC 60254-4 and IEC 60801-2 to 60801-3 covering protection against nuisance tripping due to transient overvoltages, lightning strikes, switching of devices on the distribution system, electrostatic discharges, radiofrequency interference.

Power supply

Reverse feeding

EasyPact earth-leakage circuit breakers can be supplied from either the top or the bottom for voltages up to 300 V AC. For voltages over 300 V AC, only supply from the top is possible (Line-Load indication on the cover of the breaker).

Power supply of the electronics

EasyPact earth-leakage circuit breakers are self-supplied by the distribution-system voltage and therefore do not require any external source. They fully comply with new IEC requirements (Annex B): they are powered from the three phases and continue to function even if one phase is missing.

Dielectric tests

EasyPact earth-leakage circuit breakers are equipped with a disconnecting switch in order to protect the electronics during dielectric tests.

When the disconnecting switch is activated, the circuit breaker is automatically tripped. It is mechanically impossible to switch on the circuit breaker, until the earth-leakage function is re-energised.

Tripping features

Tripping indications:

- EasyPact earth-leakage circuit breakers have a yellow mechanical indicator to locally signal tripping due to an earth fault.
- EasyPact earth-leakage circuit breakers may be equipped with an earth-leakage alarm switch (ALV) to remotely signal tripping due to an earth fault.

Resetting

EasyPact earth-leakage circuit breakers are fully reset by the operating handle. After resetting, tripping indicators (mechanical and ALV) come to normal position.

ELCB protection characteristics

Sensitivity $I_{\Delta n}$ (A)	adjustable	0.1 - 0.3 - 0.5 - 1
Time delay	Intentional delay (ms)	adjustable
	Max. breaking time (s)	0.15 - 0.4 - 1 - 2
Rated voltage	AC 50/60 Hz (V)	100...440

Earth-leakage circuit breakers

With three built-in protections:


- overload
- short-circuit
- earth-leakage.

From 63 A to 250 A

With adjustable sensibility and time delay

Up to 36 kA at 415 V

In 3 poles and 4 poles

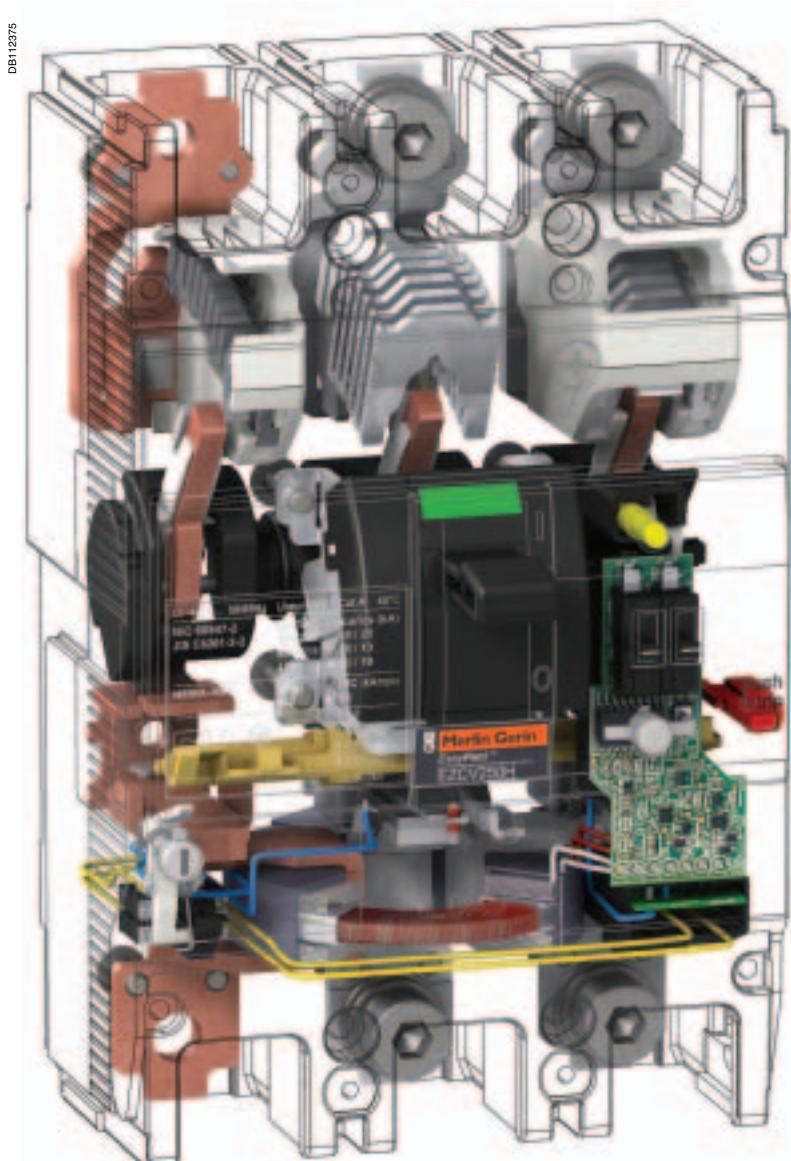




EZC100-1P.



EZC100-2P.



EZC100-3P.

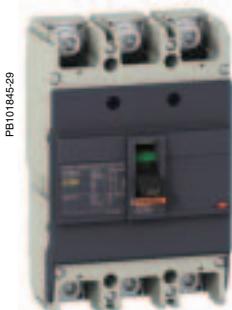

EZC250-3P.

PB101838-12

PB101840-18

PB101843-24

PB101845-29

EasyPact circuit breakers

Number of poles

Rated current (A) In at 40 °C

Rated insulation voltage (V) Ui

Rated impulse withstand voltage (kV) Uimp

Rated operational voltage (V) Ue AC 50/60 Hz

DC

Electrical characteristics as per IEC 60947-2, EN 60947-2, JIS C8201-2-1

Ultimate breaking capacity (kA rms)	Icu	AC 50/60 Hz	110/130 V
		220/230/240 V	
		380 V	
		400/415 V	
		440 V	
		550 V	
	DC	125 V (1P)	
		250 V	
		(2P in series)	
Rated service breaking capacity (kA rms)	Ics	% Icu	110-400 V
			415-550 V

Suitability for isolation

Utilisation category

Pollution degree

Endurance (C-O cycles)

Mechanical

Electrical In/415 V

Electrical characteristics as per NEMA-AB1

Breaking capacity (kA rms)	HIC	AC 50/60 Hz	240 V
			277/480 V

Protection

Overload protection	Bimetal
Instantaneous protection	Magnetic

Auxiliaries

Indication contacts	Auxiliary switch	AX
	Alarm switch	AL
	Combined AX + AL	AXAL
Voltage releases	Shunt trip release	SHT
	Undervoltage release	UVR

Installation

Connection	Crimp lugs/bars
Accessories	Box lugs for bare cables
	Rotary handles
	Direct
	Extended
	Terminal extensions
	Spreaders
	Phase barriers
	Terminal shields
	Padlocking system
	DIN rail plate

Dimension and weight

Dimensions (mm)	D x H W
Weight (kg)	

EZC100B	EZC100F	EZC100N	EZC100H			EZC250F	EZC250N	EZC250H
3	3	1	3	1	2-3	3	3	2-3
15, 16, 20, 25, 30, 32, 40, 45, 50, 60	15, 16, 20, 25, 30, 32, 40, 45, 50, 60, 63, 75, 80, 100	15, 16, 20, 25, 30, 32, 40, 45, 50, 60, 63, 75, 80, 100	15, 16, 20, 25, 30, 32, 40, 45, 50, 60, 63, 75, 80, 100	15, 16, 20, 25, 30, 32, 40, 45, 50, 60, 63, 75, 80, 100	15, 16, 20, 25, 30, 32, 40, 45, 50, 60, 63, 75, 80, 100	100, 125, 150, 160, 175, 200, 225, 250	100, 125, 150, 160, 175, 200, 225, 250	100, 125, 150, 160, 175, 200, 225, 250
690	690	690	690	690	690	690	690	690
6	6	6	6	6	6	6	6	6
550	550	415	550	415	550	550	550	550
-	250	125	250	125	250	250	250	250
10	25	25	25	50	100	25	50	85
10	25	18	25	25	100 ⁽¹⁾	25	50	85
7.5	10	2.5	18	5	30	18	25	36
7.5	10	2.5	15	5	30	18	25	36
5	7.5	-	10	-	20	15	20	25
2.5	5	-	5	-	10	5	8	10
-	5	5	5	10	10	5	20	30
-	5	-	5	-	10	5	20	30
25 %	50 %	50 %	50 %	50 %	50 %	50 %	50 %	50 %
25 %	50 %	50 %	50 %	50 %	25 %	50 %	50 %	50 %
■	■	■	■	■	■	■	■	■
A	A	A	A	A	A	A	A	A
3	3	3	3	3	3	3	3	3
8 500	8 500	8 500	8 500	8 500	8 500	10 000	10 000	10 000
1 500	1 500	1 500	1 500	1 500	1 500	5 000	5 000	5 000
-	-	10	25	18	100	25	50	85
-	-	10 ⁽²⁾	10	18 ⁽²⁾	18 ⁽³⁾	15	18	25 ⁽³⁾
fixed	fixed	fixed	fixed	fixed	fixed	fixed	fixed	fixed
fixed	fixed	fixed	fixed	fixed	fixed	10 ln	10 ln	10 ln
■	■	-	■	-	■	■	■	■
■	■	-	■	-	■	■	■	■
■	■	-	■	-	■	■	■	■
■	■	-	■	-	■	■	■	■
■	■	-	■	-	■	■	■	■
■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■	■
■	■	-	■	-	■ ⁽³⁾	■	■	■
■	■	-	■	-	■ ⁽³⁾	■	■	■
-	-	-	-	-	-	■	■	■
■	■	-	■	-	■	■	■	■
■	■	■	■	■	■	■	■	■
■	■	-	■	-	■ ⁽³⁾	■	■	■
■	■	■	■	■	■	■	■	■
■	■	-	■	-	■ ⁽³⁾	■	■	■
■	■	■	■	■	■	■	■	■
60 x 130	60 x 130	60 x 130	60 x 130	60 x 130	60 x 130	60 x 165	60 x 165	60 x 165
75	75	25	75	25	50 (2P), 75 (3P)	105	105	105
0.78	0.78	0.28	0.78	0.28	0.6 (2P), 0.78 (3P)	1.3	1.3	1.1 (2P), 1.3 (3P)

(1) 50 kA for 2 poles.

(2) For 277 V only.

(3) For 3 poles only.



EZC250.



EZCV250-4P.



EZC400-3P.



EZC400-4P.

EasyPact circuit breakers

Number of poles		
Rated current (A)	In	at 40°C
Rated insulation voltage (V)	Ui	
Rated impulse withstand voltage (kV)	Ui _{imp}	
Rated operational voltage (V)	Ue	AC 50/60 Hz DC
Electrical characteristics as per IEC 60947-2, EN 60947-2 and JIS C8201-2-1/C8201-2-2		
Ultimate breaking capacity (kA rms)	Icu	AC 50/60 Hz 220/230/240 V 380 V 400/415 V 440 V 550 V DC 125 V (1P) 250 V (2P in series)
Rated service breaking capacity (kA rms)	Ics	% Icu
Suitability for isolation		
Utilisation category		
Pollution degree		
Endurance (C-O cycles)	Mechanical Electrical	In/415 V
Electrical characteristics as per NEMA-AB1		
Breaking capacity (kA rms)	HIC	AC 50/60 Hz 240 V 277/480 V
Protection		
Overload protection	Bimetal	
Instantaneous protection	Magnetic	fixed ($\pm 20\%$)
Earth-leakage protection		
Adjustable	Sensitivities $I\Delta n$ (A) Time-delay (ms)	
	Max. breaking time (s) at 2 $I\Delta n$	
Auxiliaries		
Indication contacts	Auxiliary switch AX Alarm switch AL Combined AX + AL AXAL Earth-alarm switch ALV	
Voltage releases	Shunt trip release SHT Undervoltage release UVR	
Installation		
Connection	Crimp lugs / bars	
Accessories	Box lugs for bare cables Rotary handles Direct Extended Terminal extensions Spreaders Phase barriers Terminal shields Padlocking system	
Dimension and weight		
Dimensions (mm)	D x H W	
Weight (kg)		

EZC250N	EZC250H	EZCV250N	EZCV250H	EZC400N	EZC400H
4	4	3-4	3-4	3-4	3-4
63, 80, 100, 125, 150, 160, 175, 200, 225, 250	63, 80, 100, 125, 150, 160, 175, 200, 225, 250	63, 80, 100, 125, 150, 160, 175, 200, 225, 250	63, 80, 100, 125, 150, 160, 175, 200, 225, 250	250, 300, 320, 350, 400	250, 300, 320, 350, 400
690	690	440	440	690	690
6	6	6	6	8	8
550	550	440	440	550	550
250	250	-	-	250	250
50	85	85	100	85	100
25	36	25	36	36	50
25	36	25	36	36	50
20	25	20	25	36	50
8	10	-	-	15	20
20	30	-	-	-	-
20	30	-	-	20	40
50 %	50 %	50 %	50 %	50 %	50 %
■	■	■	■	■	■
A	A	A	A	A	A
3	3	3	3	3	3
10 000	10 000	10 000	10 000	4 000	4 000
5 000	5 000	5 000	5 000	1 000	1 000
50	85	50	85	50	85
18	25	-	-	25	35
fixed	fixed	fixed	fixed	fixed	fixed
10 ln	10 ln	10 ln	10 ln	10 ln	10 ln
-	-	0.1/0.3/0.5/1	0.1/0.3/0.5/1	-	-
-	-	0/200/500/1000	0/200/500/1000	-	-
-	-	0.15/0.4/1/2	0.15/0.4/1/2	-	-
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	-	-
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
■	■	■	■	■	■
68 x 165	68 x 165	68 x 165	68 x 165	103 x 257	103 x 257
140	140	105 (3P) 140 (4P)	105 (3P) 140 (4P)	140 (3P) 185 (4P)	140 (3P) 185 (4P)
1.8	1.8	1.6 (3P) 2.1 (4P)	1.6 (3P) 2.1 (4P)	5 (3P) 7.5 (4P)	5 (3P) 7.5 (4P)

Catalogue numbers

EZC100B 7.5 kA (400 V AC)

EZC100F 10 kA (400 V AC)



EZC100B.



EZC100F.

EZC100B 15 to 63 A

Number of poles 3P

Current rating (A) 15 - 16 - 20 - 25 - 30 - 32 - 40 - 45 - 50 - 60

Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1

Ue (V)	Icu (kA)	Ics (% Icu)
Ue = 550 V AC	220/230/240 10	25 %
Ui = 690 V	380/400/415 7.5	25 %
Uimp = 6 kV	440 5	25 %
	550 2.5	25 %
Rating	Cat. no.	
15 A	EZC100B3015	
16 A	EZC100B3016	
20 A	EZC100B3020	
25 A	EZC100B3025	
30 A	EZC100B3030	
32 A	EZC100B3032	
40 A	EZC100B3040	
45 A	EZC100B3045	
50 A	EZC100B3050	
60 A	EZC100B3060	

EZC100F 15 to 100 A

Number of poles 3P

Current rating (A) 15 - 16 - 20 - 25 - 30 - 32 - 40 - 45 - 50 - 60 - 63 - 75 - 80 - 100

Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1

Ue (V)	Icu (kA)	Ics (% Icu)
Ue = 550 V AC	220/230/240 25	50 %
Ui = 690 V	380/400/415 10	50 %
Uimp = 6 kV	440 7.5	50 %
	550 5	50 %
DC	125 (1P) 5	50 %
	250 (2P) 5	50 %

EZC100F 15 to 100 A

Number of poles 3P

Current rating (A) 15 - 16 - 20 - 25 - 30 - 32 - 40 - 45 - 50 - 60 - 63 - 75 - 80 - 100

Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1

Rating	Cat. no.
15 A	EZC100F3015
16 A	EZC100F3016
20 A	EZC100F3020
25 A	EZC100F3025
30 A	EZC100F3030
32 A	EZC100F3032
40 A	EZC100F3040
45 A	EZC100F3045
50 A	EZC100F3050
60 A	EZC100F3060
63 A	EZC100F3063
75 A	EZC100F3075
80 A	EZC100F3080
100 A	EZC100F3100



PB101838-10

EZC100N-1P.



PB101843-20

EZC100N-3P.

EZC100N 15 to 100 A

Number of poles	1P and 3P		
Current rating (A)	15 - 16 - 20 - 25 - 30 - 32 - 40 - 45 - 50 - 60 - 63 - 75 - 80 - 100		

Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1

Ue (V)	Icu (kA)	Ics (% Icu)	
		1P	3P
Ue = 550 V	AC	110/130	25
Ui = 690 V		220/230/240	18
Uimp = 6 kV		380	2.5
		400/415	2.5
		440	-
		550	-
	DC	125 (1P)	5
		250 (2P)	-

Breaking capacities (kA rms) as NEMA-AB1

Ue (V)	HIC (kA)	Rating	
		1P	3P
AC	240	-	25
	277	10	-
	277/480	-	10

Rating	Cat. no.
	1P
15 A	EZC100N1015
16 A	EZC100N1016
20 A	EZC100N1020
25 A	EZC100N1025
30 A	EZC100N1030
32 A	EZC100N1032
40 A	EZC100N1040
45 A	EZC100N1045
50 A	EZC100N1050
60 A	EZC100N1060
63 A	EZC100N1063
75 A	EZC100N1075
80 A	EZC100N1080
100 A	EZC100N1100
	3P



PB101839-10

EZC100H-1P.



PB101840-15

EZC100H-2P.



PB101844-20

EZC100H-3P.

EZC100H 15 to 100 A

Number of poles	1P, 2P and 3P			
Current rating (A)	15 - 16 - 20 - 25 - 30 - 32 - 40 - 45 - 50 - 60 - 63 - 75 - 80 - 100			
Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1				

Ue = 550 V	AC	Ue (V)	Icu (kA)			Ics (% Icu) 1P - 2P - 3P
			1P	2P	3P	
Ui = 690 V		220/230/240	25	50	100	50 %
Uimp = 6 kV		380/400	5	30	30	50 %
		415	5	30	30	25 %
		440	-	20	20	25 %
		550	-	10	10	25 %
DC		125 (1P)	10	10	10	50 %
		250 (2P)	-	10	10	50 %

Breaking capacities (kA rms) as per NEMA-AB1

Ue (V)	AC	HIC (kA)		
		1P	2P	3P
240		18	100	100
277		18	-	-
277/480		-	-	18

Rating	Cat. no.		
	1P	2P	3P
15 A	EZC100H1015	EZC100H2015	EZC100H3015
16 A	EZC100H1016	EZC100H2016	EZC100H3016
20 A	EZC100H1020	EZC100H2020	EZC100H3020
25 A	EZC100H1025	EZC100H2025	EZC100H3025
30 A	EZC100H1030	EZC100H2030	EZC100H3030
32 A	EZC100H1032	EZC100H2032	EZC100H3032
40 A	EZC100H1040	EZC100H2040	EZC100H3040
45 A	EZC100H1045	EZC100H2045	EZC100H3045
50 A	EZC100H1050	EZC100H2050	EZC100H3050
60 A	EZC100H1060	EZC100H2060	EZC100H3060
63 A	EZC100H1063	EZC100H2063	EZC100H3063
75 A	EZC100H1075	EZC100H2075	EZC100H3075
80 A	EZC100H1080	EZC100H2080	EZC100H3080
100 A	EZC100H1100	EZC100H2100	EZC100H3100

Catalogue numbers**EZC250F 18 kA (400 V AC)****EZC250N 25 kA (400 V AC)**

EZC250F.



EZC250N.

EZC250F 100 to 250 A**Number of poles****3P****Current rating (A)****100 - 125 - 150 - 160 - 175 - 200 - 225 - 250****Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1**

		Ue (V)	Icu (kA)	Ics (% Icu)
Ue = 550 V	AC	220/230/240	25	50 %
Ui = 690 V		380/400/415	18	50 %
Uiimp = 6 kV		440	15	50 %
		550	5	50 %
	DC	125 (1P)	5	50 %
		250 (2P)	5	50 %

Breaking capacities (kA rms) as per NEMA-AB1

	Ue (V)	HIC (kA)
AC	240	25
	277/480	15

Rating**Cat. no.**

100 A	EZC250F3100
125 A	EZC250F3125
150 A	EZC250F3150
160 A	EZC250F3160
175 A	EZC250F3175
200 A	EZC250F3200
225 A	EZC250F3225
250 A	EZC250F3250

EZC250N 100 to 250 A**Number of poles****3P****Current rating (A)****100 - 125 - 150 - 160 - 175 - 200 - 225 - 250****Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1**

		Ue (V)	Icu (kA)	Ics (% Icu)
Ue = 550 V	AC	220/230/240	50	50 %
Ui = 690 V		380/400/415	25	50 %
Uiimp = 6 kV		440	20	50 %
		550	8	50 %
	DC	125 (1P)	20	50 %
		250 (2P)	20	50 %

Breaking capacities (kA rms) as per NEMA-AB1

	Ue (V)	HIC (kA)
AC	240	50
	277/480	18

Rating**Cat. no.**

100 A	EZC250N3100
125 A	EZC250N3125
150 A	EZC250N3150
160 A	EZC250N3160
175 A	EZC250N3175
200 A	EZC250N3200
225 A	EZC250N3225
250 A	EZC250N3250



EZC250H-2P.



EZC250H-3P.

PB101846-29

PB101848-29

EZC250H 100 to 250 A

Number of poles	2P and 3P
Current rating (A)	100 - 125 - 150 - 160 - 175 - 200 - 225 - 250
Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1	

Ue (V)	Icu (kA)	Ics (% Icu)	
		2P	3P
Ue = 550 V	AC 220/230/240	85	85
Ui = 690 V	380/400/415	36	36
Uimp = 6 kV	440	25	25
	550	10	10
	DC 125 (1P)	30	30
	250 (2P)	30	30
		50 %	50 %


Breaking capacities (kA rms) as per NEMA-AB1

Ue (V)	HIC (kA)	
	2P	3P
AC 240	85	85
277/480	-	25

Rating	Cat. no.
2P	3P
100 A	EZC250H2100
125 A	EZC250H2125
150 A	EZC250H2150
160 A	EZC250H2160
175 A	EZC250H2175
200 A	EZC250H2200
225 A	EZC250H2225
250 A	EZC250H2250
	EZC250H3225
	EZC250H3250

Catalogue numbers**EZC250N 25 kA (400 V AC)****EZC250H 36 kA (400 V AC)**

EZC250N.

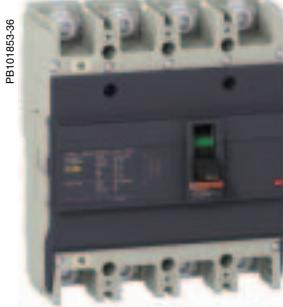

EZC250H.

EZC250N 63 A to 250 A

Number of poles	4P
Current rating (A)	63 - 80 - 100 - 125 - 150 - 160 - 175 - 200 - 225 - 250

Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1

		Ue (V)	Icu (kA)	Ics (% Icu)
Ue = 550 V	AC	220/230/240	50	50 %
Ui = 690 V		380/400/415	25	50 %
Ui _{imp} = 6 kV		440	20	50 %
		550	8	50 %
	DC	125 (1P)	20	50 %
		250 (2P)	20	50 %

Breaking capacities (kA rms) as per NEMA-AB1

	Ue (V)	HIC (kA)
AC	240	50
	277/480	18

Rating

Rating	Cat. no.
4P 3t	4P 4t
63 A	EZC250N4063
80 A	EZC250N4080
100 A	EZC250N4100
125 A	EZC250N4125
150 A	EZC250N4150
160 A	EZC250N4160
175 A	EZC250N4175
200 A	EZC250N4200
225 A	EZC250N4225
250 A	EZC250N4250

EZC250H 63 A to 250 A

Number of poles	4P
Current rating (A)	63 - 80 - 100 - 125 - 150 - 160 - 175 - 200 - 225 - 250

Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1

		Ue (V)	Icu (kA)	Ics (% Icu)
Ue = 550 V	AC	220/230/240	85	50 %
Ui = 690 V		380/400/415	36	50 %
Ui _{imp} = 6 kV		440	25	50 %
		550	10	50 %
	DC	125 (1P)	30	50 %
		250 (2P)	30	50 %

Breaking capacities (kA rms) as per NEMA-AB1

	Ue (V)	HIC (kA)
AC	240	85
	277/480	25

Rating

Rating	Cat. no.
4P 3t	4P 4t
63 A	EZC250H4063
80 A	EZC250H4080
100 A	EZC250H4100
125 A	EZC250H4125
150 A	EZC250H4150
160 A	EZC250H4160
175 A	EZC250H4175
200 A	EZC250H4200
225 A	EZC250H4225
250 A	EZC250H4250

Catalogue numbers

EZCV250N 25 kA (400 V AC)

EZCV250H 36 kA (400 V AC)



EZCV250N-3P.



EZCV250N-4P.



EZCV250H-3P.



EZCV250H-4P.

EZCV250N 63 A to 250 A

Number of poles	3P and 4P
Current rating (A)	63 - 80 - 100 - 125 - 150 - 160 - 175 - 200 - 225 - 250

Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1/C8201-2-2

		Ue (V)	Icu (kA)	Ics (% Icu)
Ue = 440 V	AC	220/230/240	85	50 %
Ui = 440 V		380/400/415	25	50 %
Uimp = 6 kV		440	20	50 %

Breaking capacities (kA rms) as per NEMA-AB1

	Ue (V)	HIC (kA)
AC	240	50

Earth-leakage characteristics

Sensitivity Δn (A)	adjustable 0.1/0.3/0.5/1
Time delay	Intentional delay (ms) adjustable 0/200/500/1000 Max. breaking time (s) 0.15/0.4/1/2

Rating	Cat. no.	3P	4P 3t	4P 4t
63 A	EZCV250N3063	EZCV250N4063	EZCV250N44063	
80 A	EZCV250N3080	EZCV250N4080	EZCV250N44080	
100 A	EZCV250N3100	EZCV250N4100	EZCV250N44100	
125 A	EZCV250N3125	EZCV250N4125	EZCV250N44125	
150 A	EZCV250N3150	EZCV250N4150	EZCV250N44150	
160 A	EZCV250N3160	EZCV250N4160	EZCV250N44160	
175 A	EZCV250N3175	EZCV250N4175	EZCV250N44175	
200 A	EZCV250N3200	EZCV250N4200	EZCV250N44200	
225 A	EZCV250N3225	EZCV250N4225	EZCV250N44225	
250 A	EZCV250N3250	EZCV250N4250	-	

EZCV250H 63 A to 250 A

Number of poles	3P and 4P
Current rating (A)	63 - 80 - 100 - 125 - 150 - 160 - 175 - 200 - 225 - 250

Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1/C8201-2-2

		Ue (V)	Icu (kA)	Ics (% Icu)
Ue = 440 V	AC	220/230/240	100	50 %
Ui = 440 V		380/400/415	36	50 %
Uimp = 6 kV		440	25	50 %

Breaking capacities (kA rms) as per NEMA-AB1

	Ue (V)	HIC (kA)
AC	240	85

Earth-leakage characteristics

Sensitivity Δn (A)	adjustable 0.1/0.3/0.5/1
Time delay	Intentional delay (ms) adjustable 0/200/500/1000 Max. breaking time (s) 0.15/0.4/1/2

Rating	Cat. no.	3P	4P 3t	4P 4t
63 A	EZCV250H3063	EZCV250H4063	EZCV250H44063	
80 A	EZCV250H3080	EZCV250H4080	EZCV250H44080	
100 A	EZCV250H3100	EZCV250H4100	EZCV250H44100	
125 A	EZCV250H3125	EZCV250H4125	EZCV250H44125	
150 A	EZCV250H3150	EZCV250H4150	EZCV250H44150	
160 A	EZCV250H3160	EZCV250H4160	EZCV250H44160	
175 A	EZCV250H3175	EZCV250H4175	EZCV250H44175	
200 A	EZCV250H3200	EZCV250H4200	EZCV250H44200	
225 A	EZCV250H3225	EZCV250H4225	EZCV250H44225	
250 A	EZCV250H3250	EZCV250H4250	-	

Catalogue numbers

EZC400N 36 kA (400 V AC)

EZC400H 50 kA (400 V AC)



EZC400N-3P.



EZC400N-4P.



EZC400H-3P.



EZC400H-4P.

EZC400N 250 A to 400 A

Number of poles	3P and 4P		
Current rating (A)	250 - 300 - 320 - 350 - 400		
Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1			
Ue = 550 V	AC Ue (V) Icu (kA) Ics (% Icu)		
Ui = 690 V	380/400/415	36	50 %
Uimp = 8 kV	440	36	50 %
	550	15	50 %
	DC 250 (2P)	20	50 %
Breaking capacities (kA rms) as per NEMA-AB1			
	AC Ue (V) HIC (kA)		
	240	50	
	277/480	25	
Rating	Cat. no.		
250 A	3P EZC400N3250 4P 3t EZC400N4250		
300 A	EZC400N3300 EZC400N4300		
320 A	EZC400N3320 EZC400N4320		
350 A	EZC400N3350 EZC400N4350		
400 A	EZC400N3400 EZC400N4400 EZC400N44400		

EZC400H 250 A to 400 A


Number of poles	3P and 4P		
Current rating (A)	250 - 300 - 320 - 350 - 400		
Breaking capacities (kA rms) as per IEC 60947-2, EN 60947-2, JIS C8201-2-1			
Ue = 550 V	AC Ue (V) Icu (kA) Ics (% Icu)		
Ui = 690 V	380	50	50 %
Uimp = 8 kV	400/415	50	50 %
	440	50	50 %
	550	20	50 %
	DC 250 (2P)	40	50 %
Breaking capacities (kA rms) as per NEMA-AB1			
	AC Ue (V) HIC (kA)		
	240	85	
	277/480	35	
Rating	Cat. no.		
250 A	3P EZC400H3250 4P 3t EZC400H4250		
300 A	EZC400H3300 EZC400H4300		
320 A	EZC400H3320 EZC400H4320		
350 A	EZC400H3350 EZC400H4350		
400 A	EZC400H3400 EZC400H4400 EZC400H44400		

Electrical and mechanical accessories overview


EasyPact EZC100

EasyPact circuit breaker EZC100 comes with a full range of accessories to fulfill different application requirements and make it easy for the end-user.

DB112364

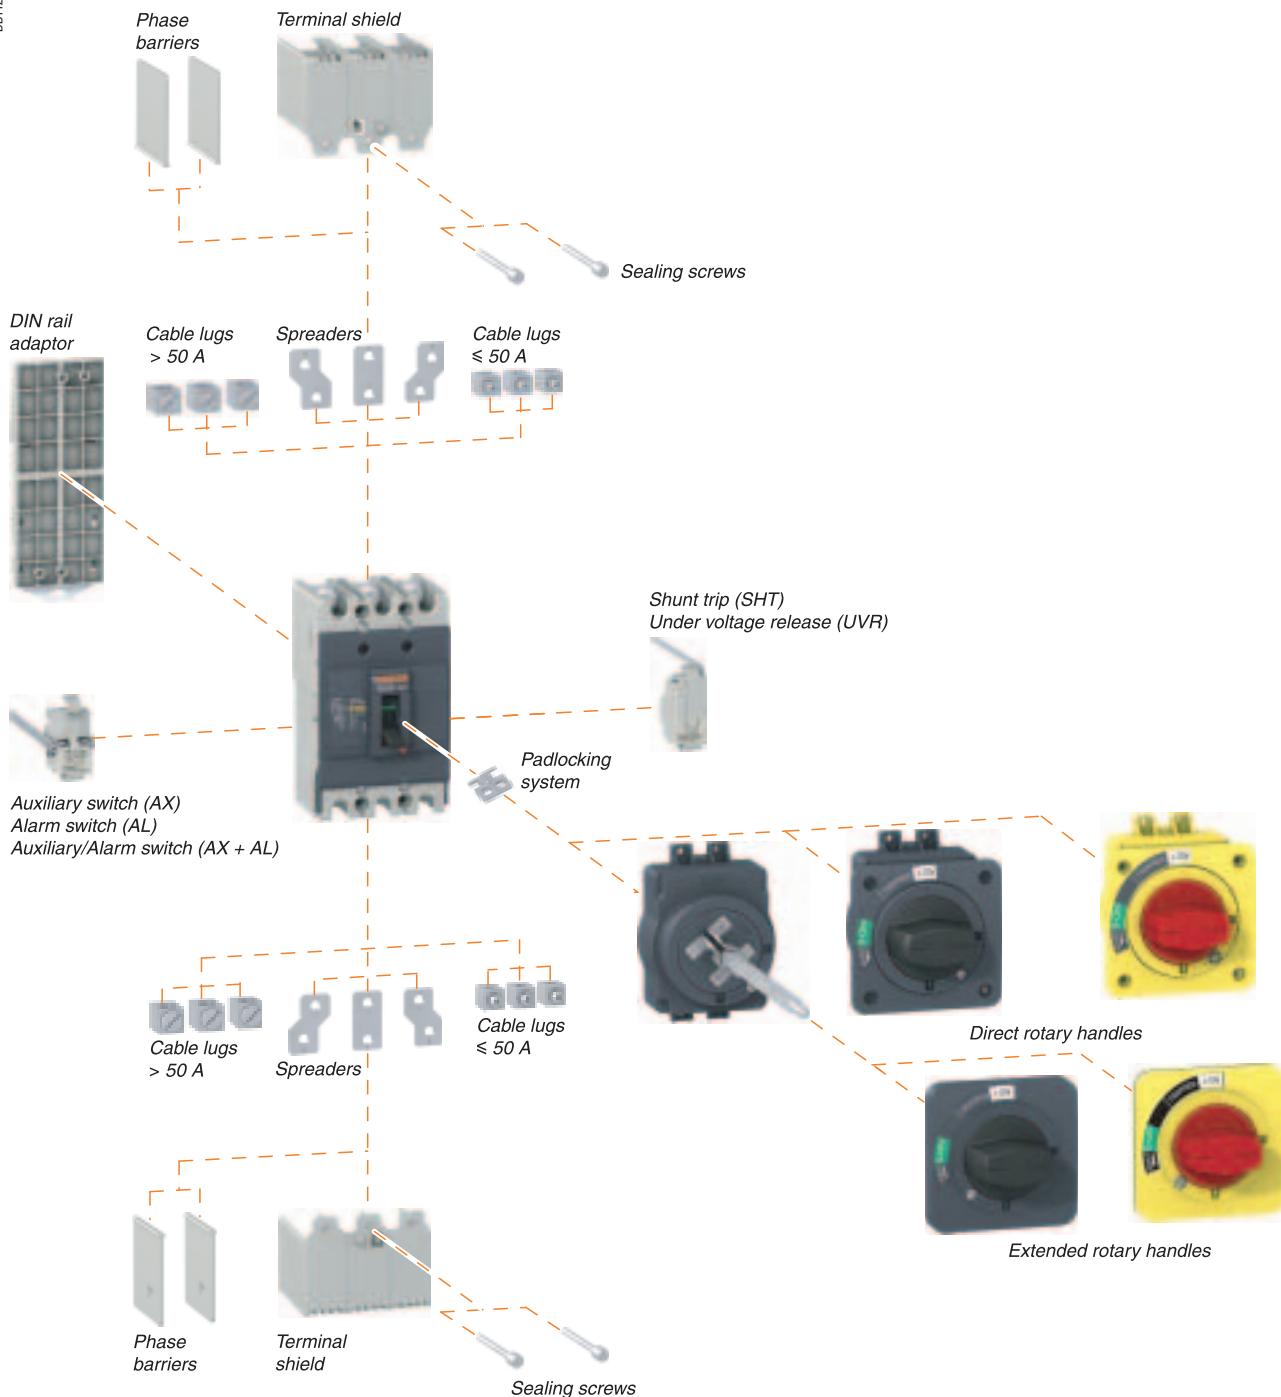

EasyPact circuit breaker EZC250 comes with a full range of accessories to fulfill different application requirements and make it easy for the end-user.

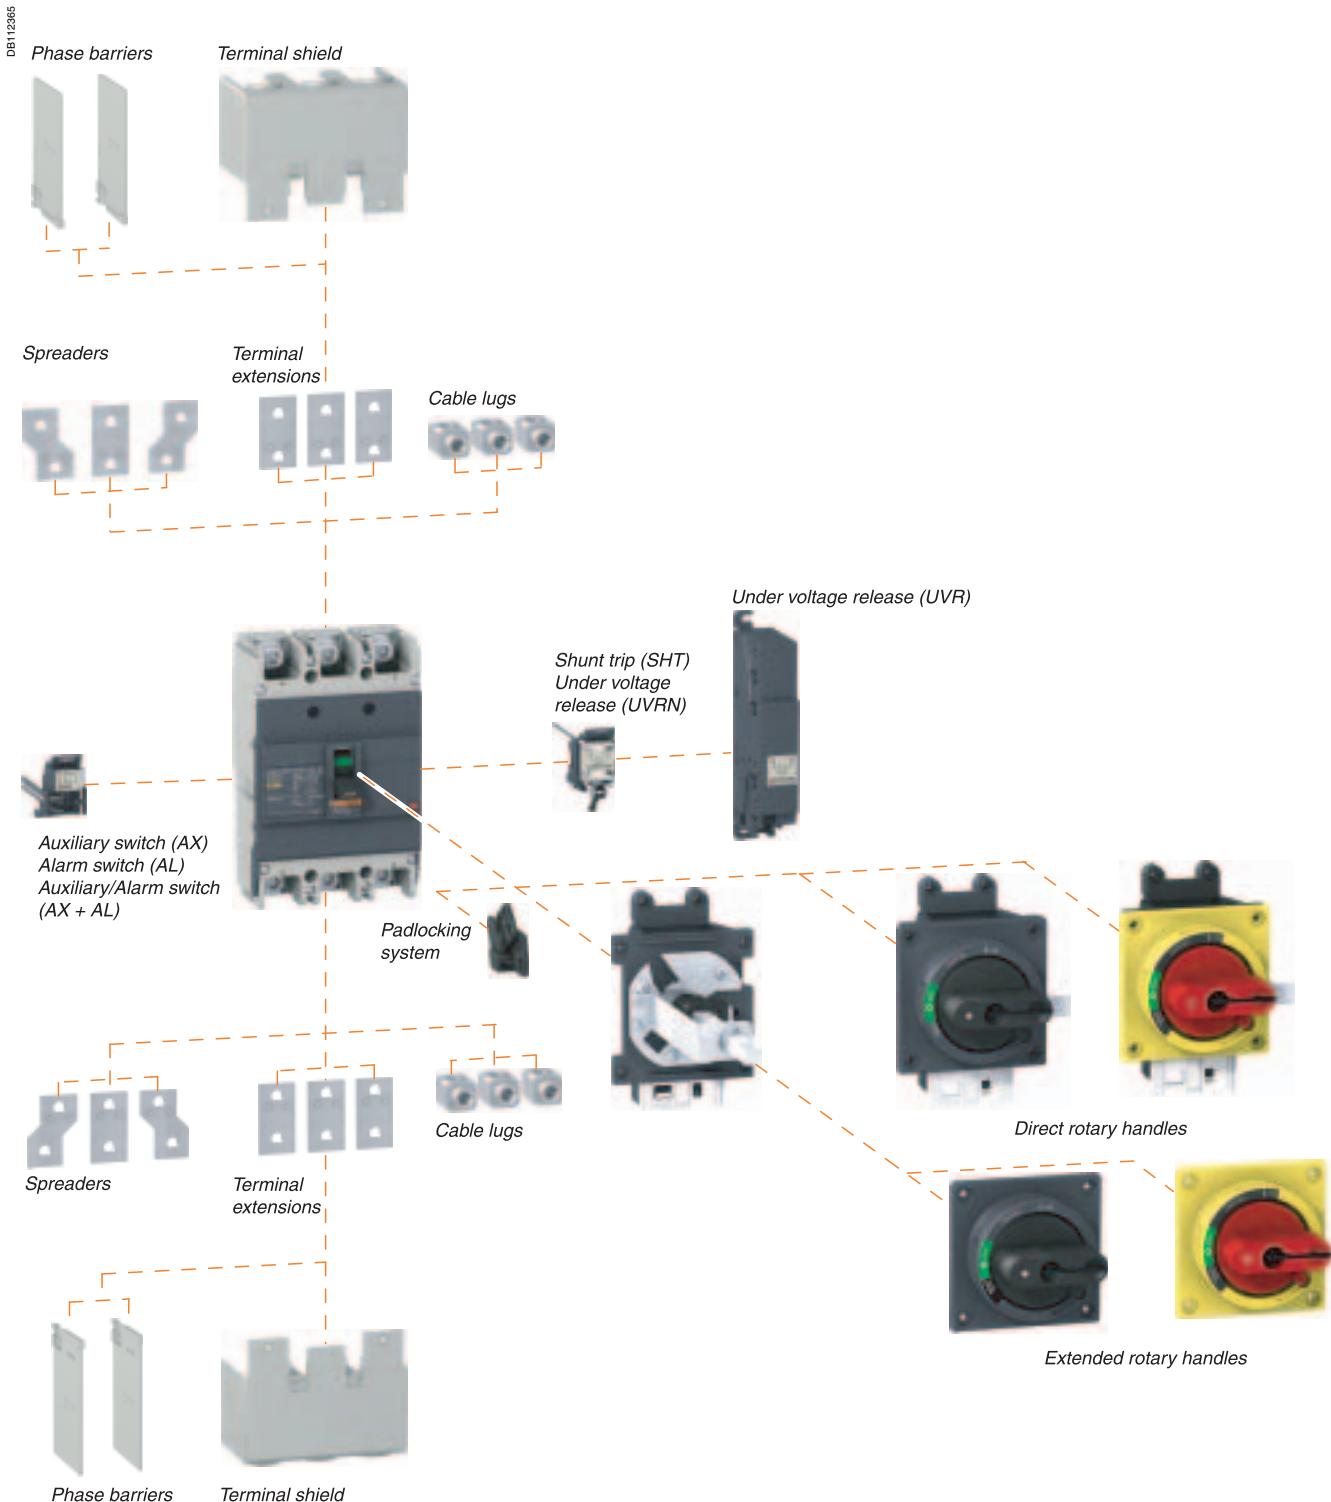


Electrical and mechanical accessories overview


EasyPact EZCV250


EasyPact circuit breaker EZCV250 comes with a full range of accessories to fulfill different application requirements and make it easy for the end-user.

DB1236

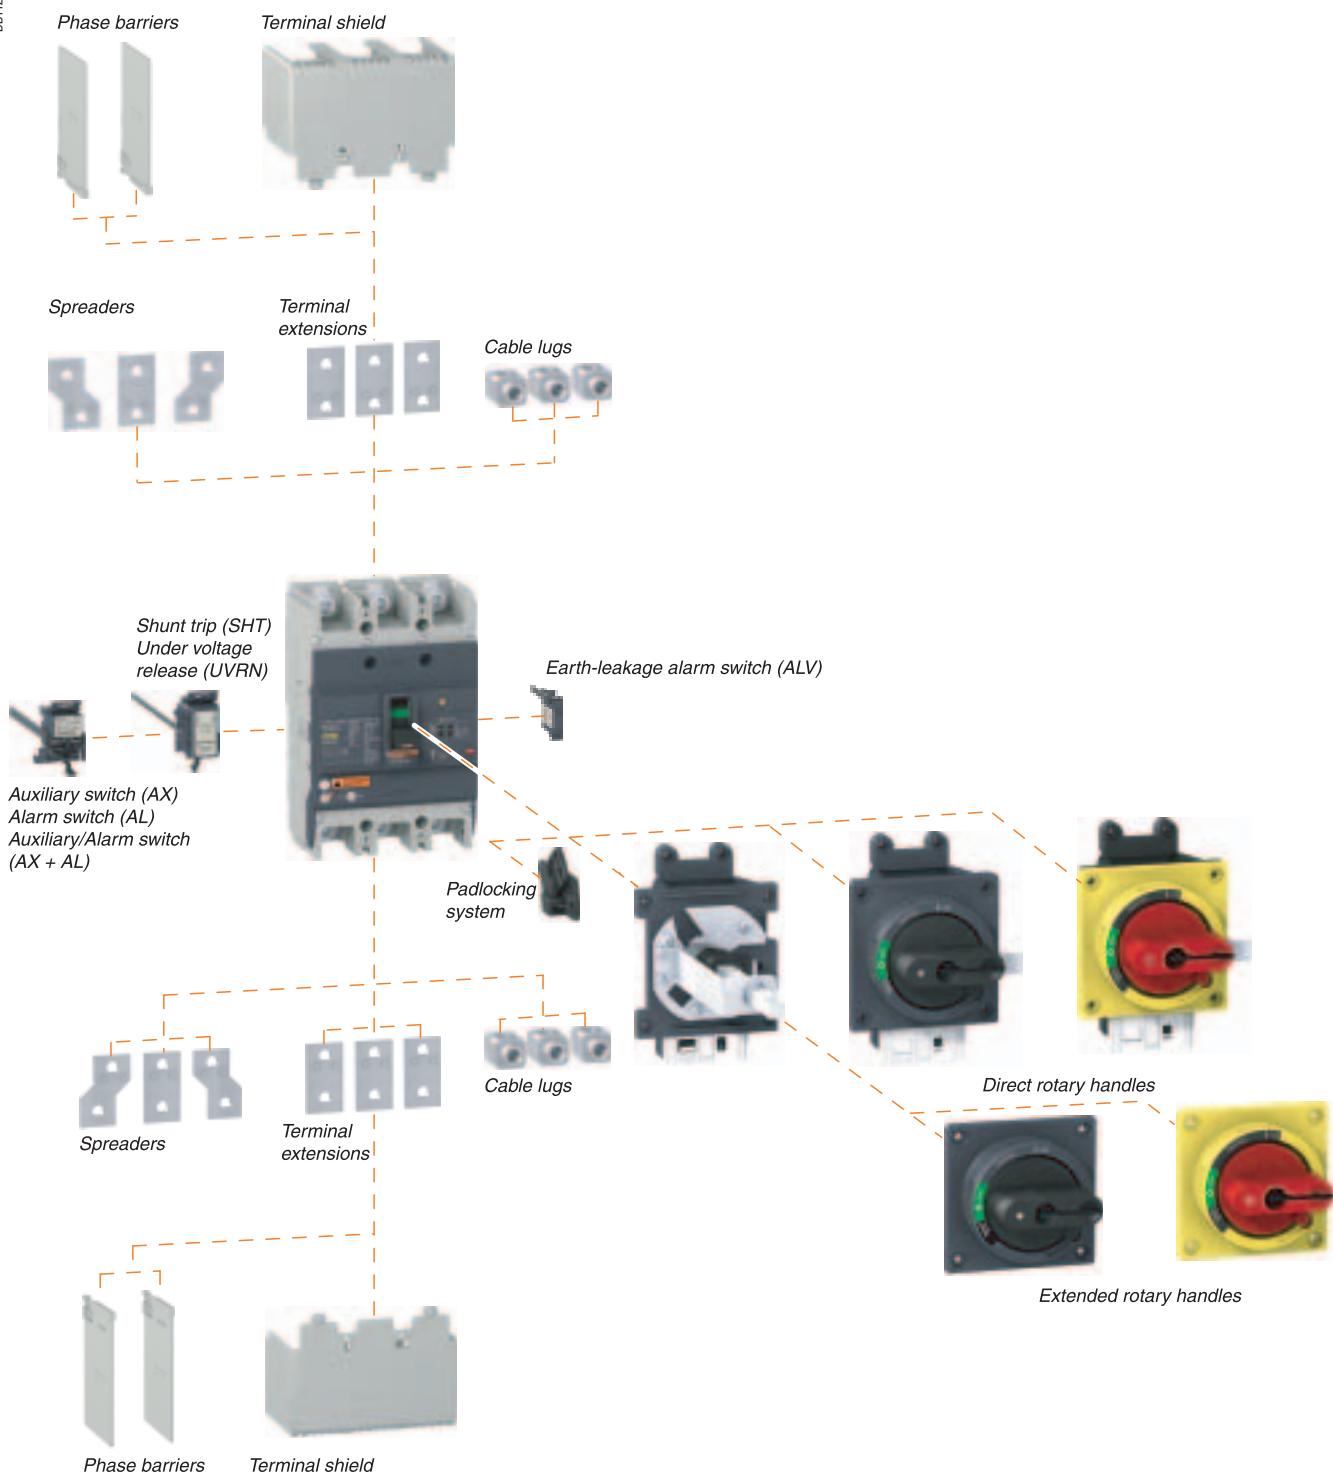


EasyPact circuit breaker EZC400 comes with a full range of accessories to fulfill different application requirements and make it easy for the end-user.

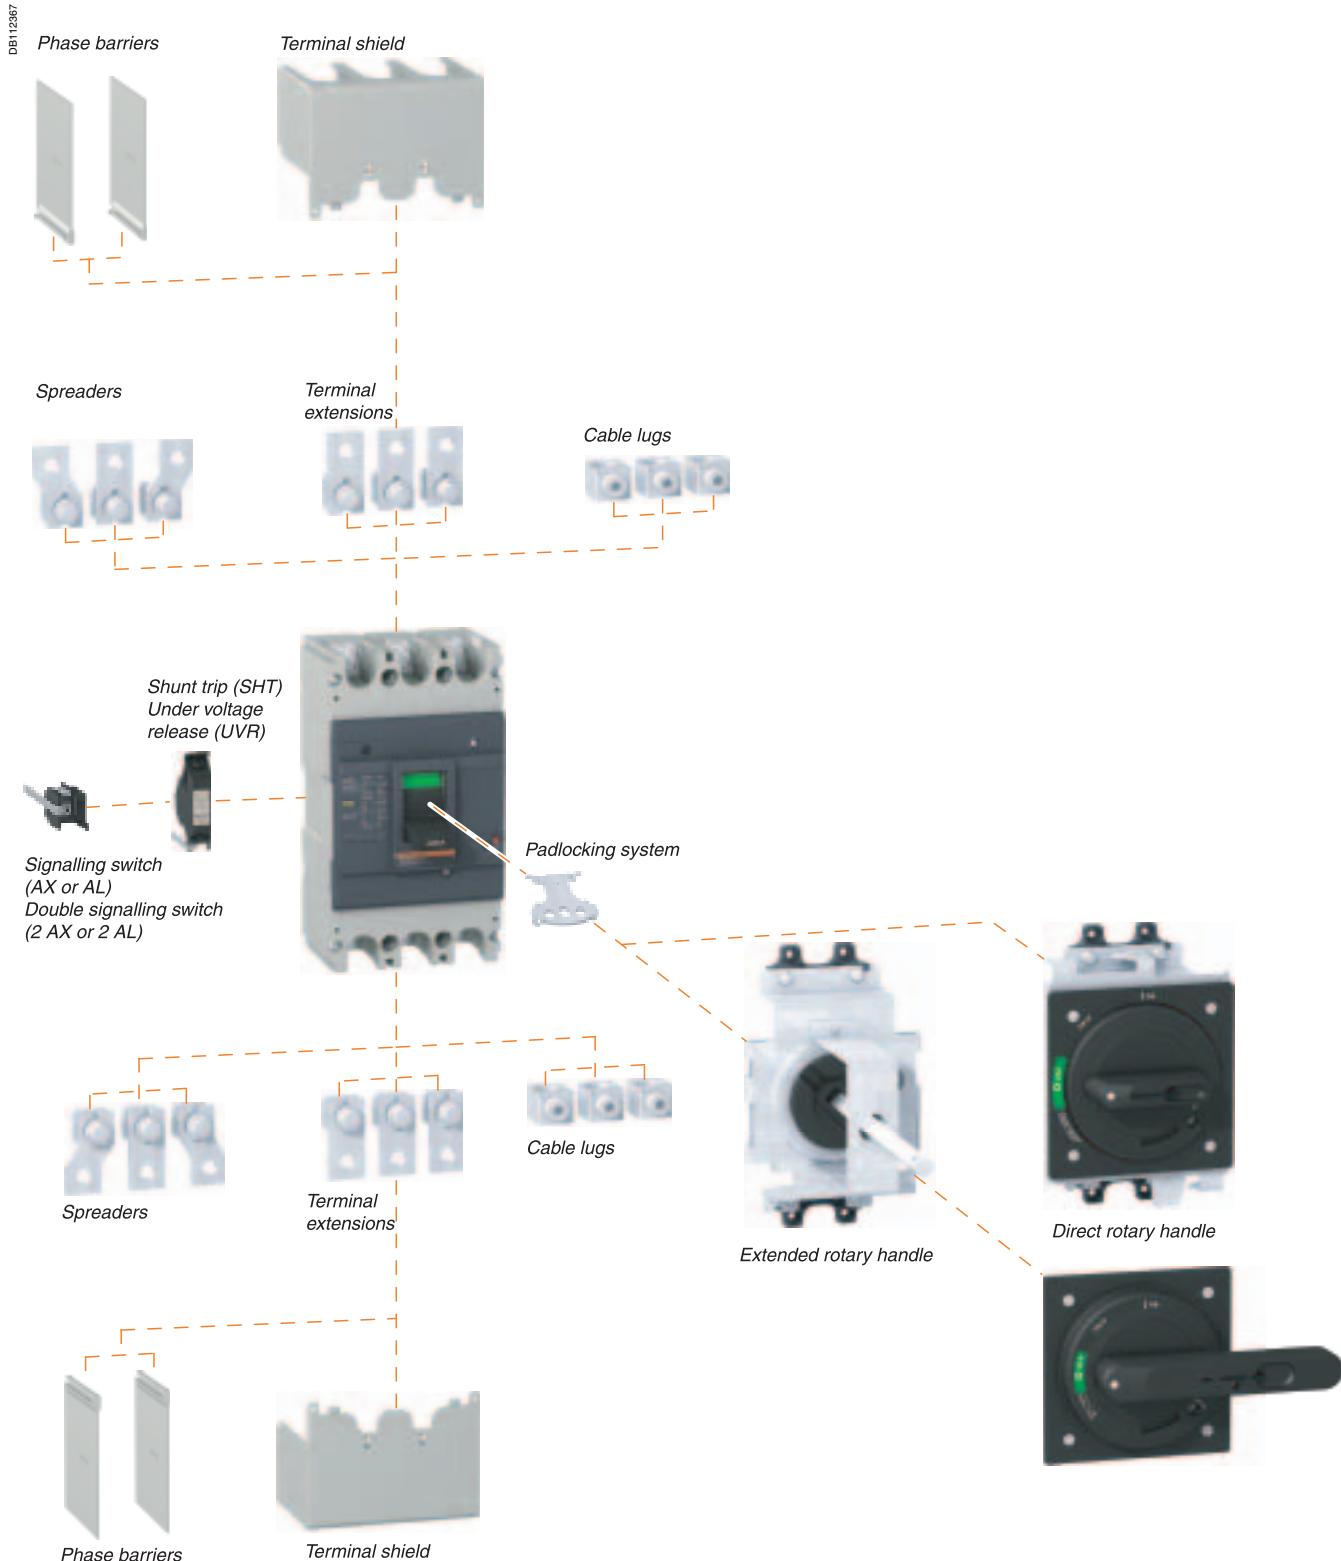


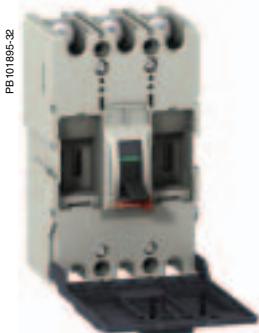


EZC100.

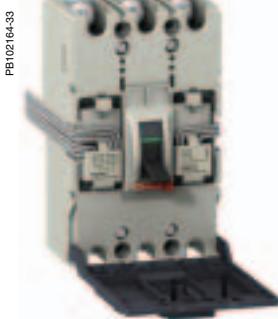

AXAL and AX electrical auxiliaries on EZC100.

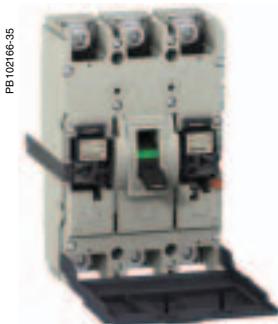

AXAL electrical auxiliaries on EZC250.

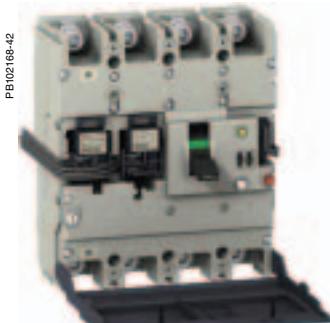

AXAL, AX and ALV electrical auxiliaries on EZCV250.


PB101895-32

PB102164-33


PB102166-35

Plug-in location: AX - AL - AXAL - ALV


EZC100

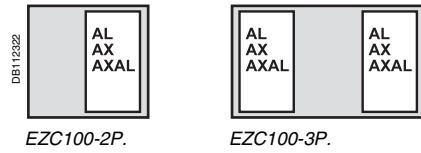

EZC250

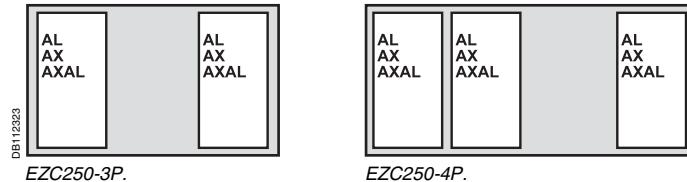

EZCV250

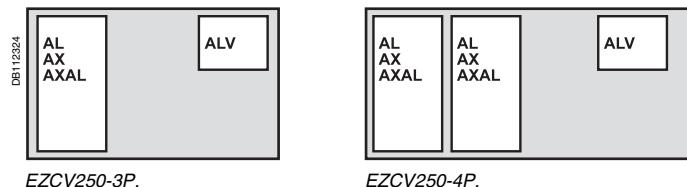

Indication contacts

Provide remote circuit breaker status information.
They can be used for indications, electrical locking, relaying, etc.
Common-point changeover contacts.

Auxiliary switch (ON/OFF)

AX indicates the position of the circuit breaker contacts.

Alarm switch (trip indication)

- AL indicates that the circuit breaker has tripped due to:
- an overload
- a short-circuit
- operation of a voltage release.
- ALV indicates that the circuit breaker has tripped due to an of earth-leakage fault.

They return to de-energised state when the circuit breaker is reset.


Characteristics

Contacts

Rated thermal current (A)	5
Minimum load	10 mA at 24 V
Utilisation category (IEC 60947-5-1)	AC12 AC15 DC12 DC14
Operational current (A)	24 V 5 5 4 3
	48 V 5 5 2.5 1
	125 V 5 3 0.4 0.4
	250 V 3 2 0.2 0.2

Connections

Connection wire length	500 mm
Cross-section	EZC100: 1 mm ² , EZC250/EZCV250: 1.5 mm ²





Auxiliary switch (AX)
EZAUX10.



Auxiliary switch (AX)
EZEAX.




Earth-leakage alarm switch
(ALV).

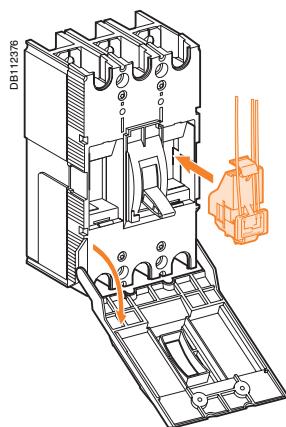


All EasyPact electrical auxiliaires are
"snapped in place"

Designation	Cat. no.	
EZC100	EZC250/EZCV250	
Auxiliary switch (AX)	EZAUX10	EZEAX
Alarm switch (AL)	EZAUX01	EZEAL
Auxiliary/Alarm switch (AXAL)	EZAUX11	EZEAXAL
Earth-leakage alarm switch (ALV)	-	EZEALV ⁽¹⁾


(1) only EZCV250.

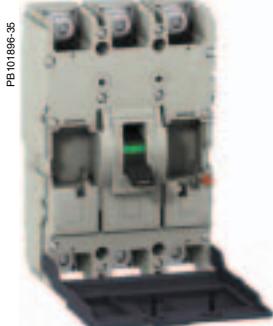


EZC100.

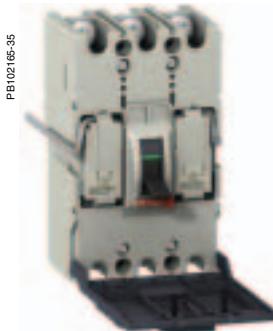



SHT and UVR releases on EZC100.

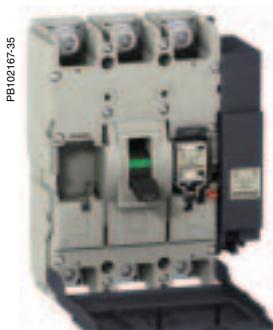

SHT and UVR releases on EZC250.

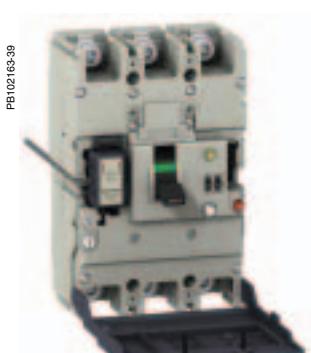

UVRN release on EZCV250.

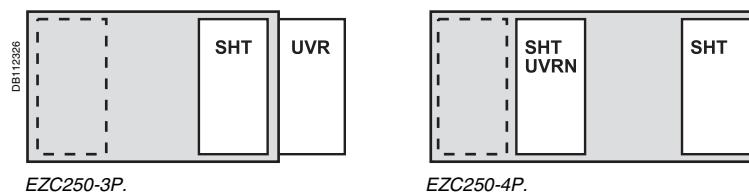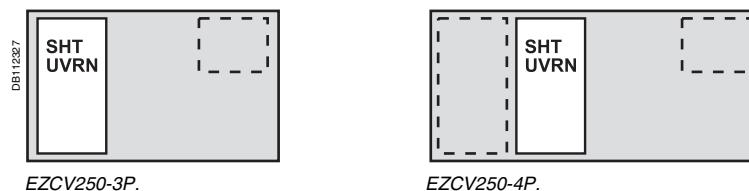Plug-in location : SHT - UVR - UVRN**EZC100****EZC250****EZCV250****Remote tripping**

Shunt Trip (SHT) or Under Voltage Release (UVR/UVRN).

Shunt Trip (SHT)

- This release trips the circuit breaker when the control voltage rises above $0.7 \times U_n$
- Control signals can be of the impulse type (≥ 20 ms) or maintained.

Under Voltage Release (UVR/UVRN)

- This release trips the circuit breaker when the control voltage drops below a tripping threshold
- Tripping threshold between 0.35 and 0.7 times the rated voltage
- Circuit breaker closing is possible only if the voltage exceeds 0.85 times the rated voltage
- Circuit breaker tripping by an UVR/UVRN release meets the requirements of standard IEC 60947-2.

Operation

When the circuit breaker has been tripped by an SHT or UVR/UVRN release, it must be reset locally:

- SHT or UVR/UVRN tripping takes priority over manual closing
- in the presence of a standing trip order, closing of the contacts, even temporary, is not possible.

Characteristics**Mechanical**

Mechanical endurance 10 % of MCCB mechanical endurance

Electrical **EZC100** **EZC250/EZCV250**

		AC	DC
SHT	pick-up consumption	< 30 VA	< 30 VA
	response time	< 50 ms	< 50 ms
UVR	seal-in consumption	< 5 VA	< 5 VA
	response time	< 50 ms	< 50 ms
UVRN	seal-in consumption	< 5 VA	< 10 W
	response time	< 50 ms	< 100 ms

Connections**EZC100** **EZC250/EZCV250**

SHT	pre-wired (1 mm ²)	pre-wired (0.5 mm ²)
UVR	pre-wired (1 mm ²)	screws (< 2 mm ²)
UVRN	pre-wired (1 mm ²)	pre-wired (0.5 mm ²)



Shunt Trip EZASHT.



Shunt Trip EZESHT.



Under Voltage Release EZAUVR.



Under Voltage Release EZEUVRN.



Under Voltage Release EZEUVR.

PB101865-16

PB101879-18

PB101866-18

PB101894-27

PB101886-15

Installation


- EZC100 SHT and UVR: internal mounting
- EZC250/EZCV250:
 - SHT: internal mounting
 - UVR: external mounting
 - UVRN: internal mounting

Designation**Cat. no.**

			EZC100	EZC250/EZCV250
SHT	AC	100-130 V	EZASHT100AC	EZESHT100AC
Shunt trip			110-120 V	EZESHT120AC
release		200-277 V	EZASHT200AC	EZESHT200AC
			200-240 V	EZESHT277AC
			277 V	EZESHT277AC
		380-480 V	EZASHT380AC	EZESHT400AC
			380-440 V	EZESHT440AC
	DC	24 V	EZASHT024AC	EZESHT024DC
		48 V	EZASHT048AC	EZESHT048DC
UVRN	AC	110-130 V	-	EZEUVRN110AC
Under voltage		200-240 V	-	EZEUVRN200AC
release		277 V	-	EZEUVRN277AC
(only EZC250-4P		380-415 V	-	EZEUVRN400AC
and EZCV250-		440-480 V	-	EZEUVRN440AC
3/4P)	DC	24 V	-	EZEUVRN024DC
		48 V	-	EZEUVRN048DC
		125 V	-	EZEUVRN125DC
UVR	AC	110-130 V	EZAUVR110AC	EZEUVR110AC
Under voltage		200-240 V	EZAUVR200AC	EZEUVR200AC
release		277 V	EZAUVR277AC	EZEUVR277AC
		380-415 V	EZAUVR380AC	EZEUVR400AC
		440-480 V	EZAUVR440AC	EZEUVR440AC
	DC	24 V	EZAUVR024DC	EZEUVR024DC
		48 V	EZAUVR048DC	EZEUVR048DC
		125 V	EZAUVR125DC	EZEUVR125DC




Direct rotary handle (black) for EZC100.

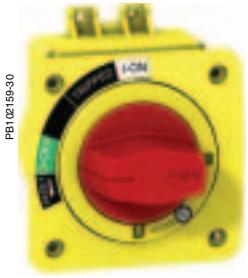

Direct rotary handle (red/yellow) for EZC100.



Direct rotary handle (black) for EZC250/EZCV250.

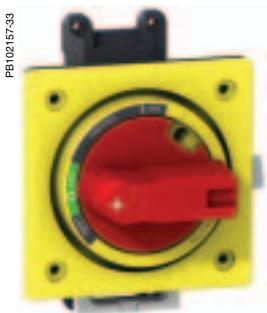


Direct rotary handle (red/yellow) for EZC250/EZCV250.

Direct rotary handle


Suitable for Motor Control Centre (MCC) switchboards.

- Degree of protection IP40 or IP54, IK07 (IP54 with gasket supplied).
- The direct rotary handle maintains:
 - suitability for isolation
 - indication of the three positions O (OFF), I (ON) and tripped
 - circuit breaker locking capability in the OFF position by one to three padlocks, (padlock not supplied) shackle diameter Ø 5 for EZC100, Ø 8 for EZC250/EZCV250
 - door opening disabled when the circuit breaker is ON
 - circuit breaker closing is disabled if the door is open.

IP40 or IP54

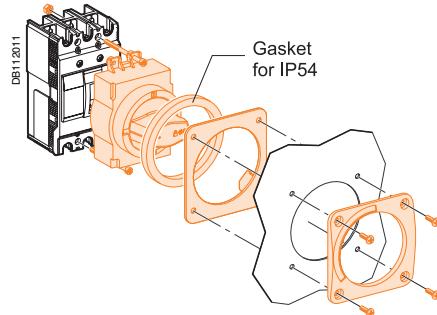


EZC100.

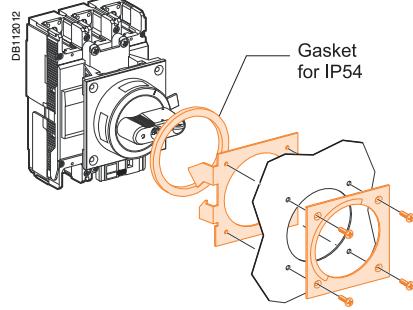


EZC250/EZCV250.

Padlocking



EZC100.




EZC250/EZCV250.

Designation	Cat. no.
Direct rotary handle (black)	EZC100 EZAROTDS
Direct rotary handle (red/yellow)	EZC250/EZCV250 EZEROTDS EZAROTDSRY EZEROTDSRY




Extended rotary handle (black) for EZC100.

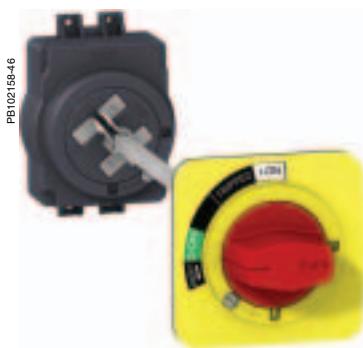

Extended rotary handle (red/yellow) for EZC100.



Extended rotary handle (black) for EZC250/EZCV250.

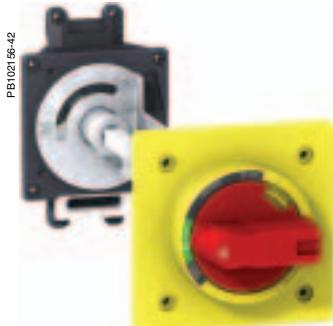

Extended rotary handle (red/yellow) for EZC250/EZCV250.

Extended rotary handle

Makes possible to operate circuit breakers installed at the back of switchboards, from the switchboard front.

- Degree of protection IP40 or IP54, IK08 (IP54 with gasket supplied).


- The extended rotary handle maintains:

- suitability for isolation
- indication of the three positions O (OFF), I (ON) and tripped
- circuit breaker locking capability in the OFF position by one to three padlocks, (padlock not supplied) shackle diameter: Ø 5 for EZC100, Ø 8 for EZC250/EZCV250
- door opening disabled when the circuit breaker is ON.


- The extended rotary handle is made up of:

- a unit on the front cover of the circuit breaker (secured by screws)
- an assembly (handle and front plate) on the door that is always secured in the same position, whether the circuit breaker is installed vertically or horizontally
- an extension shaft that must be adjusted to the distance between back of circuit breaker and door.

IP40 or IP54

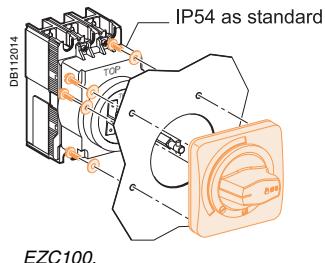


EZC100.

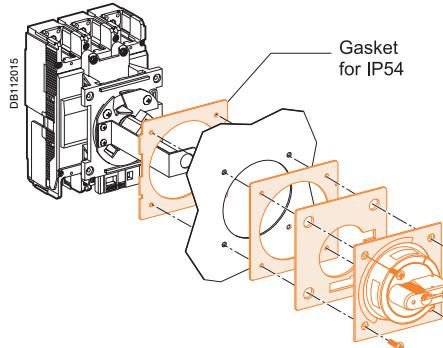


EZC250/EZCV250.

Padlocking






EZC100.



EZC250/EZCV250.

Designation

Designation	Cat. no.
EZC100	EZC250/EZCV250
Extended rotary handle (black)	EZAROTE
Extended rotary handle (red/yellow)	EZEROTERY

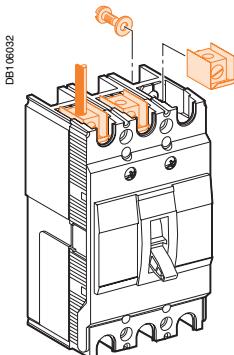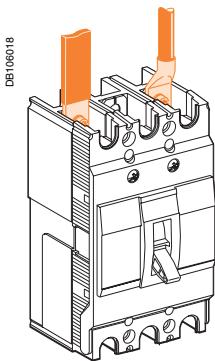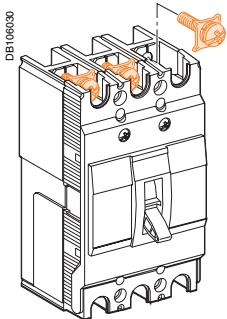

Standard circuit breaker terminals

All EasyPact circuit breakers are supplied with terminal screws


EZC100 15 to 50 A Screw M5



EZC100 60 to 100 A Screw M8



EZC250/EZCV250 63 to 250 A Screw M8




Connection of insulated bars or cables with lugs

	EZC100	EZC250/ EZCV250		
Bars	L (mm) ≤ 17	≤ 25		
	h (mm)	d + 10		
	d (mm)	≤ 7		
	e (mm)	≤ 6		
	Ø (mm)	≤ 50 A ≥ 50 A	5.5 8.5	- 9
Crimp lugs	L (mm) ≤ 17	≤ 25		
	d (mm)	≤ 9		
	Ø (mm)	≤ 50 A ≥ 50 A	5.5 8.5	- 9
Tightening torque	≤ 50 A	2 N.m		
	> 50 A	5.5 N.m		
		13 N.m		

Cable lugs


Cable lugs directly screwed on standard circuit breaker terminals.

≤ 50 A (EZC100)



Cables from 2.5 to 16 mm².

> 50 A (EZC100)



Cables from 10 to 50 mm².

≥ 100 A (EZC250/EZCV250)



Cables from 42.2 to 150 mm².

Designation	Cat. no.
EZC100	EZC250/EZCV250
EZALUG0502	-
EZALUG0503	-
EZALUG1002	-
EZALUG1003	-
-	EZELUG2503
-	EZELUG2504



Spreader.



Terminal extensions.



Spreaders

Increase the pitch of the circuit breaker terminals:

- EZC100 from 25 mm to 35 mm
- EZC250/EZCV250 from 35 mm to 45 mm.

Terminal extensions

Additional terminal extensions are available for EZC250/EZCV250.



Designation	Cat. no.
EZC100	EZC250/EZCV250
Spreaders for 3-pole breaker (set of 3)	EZASPDR3P
Spreaders for 4-pole breaker (set of 4)	EZESPDR4P
Terminal extension for 3-pole breaker (set of 3)	-
Terminal extension for 4-pole breaker (set of 4)	EZETEX
	EZETEX4P





EZC100.




EZC250/EZCV250.

Phase barriers


- Safety accessories for maximum insulation at the power connection points
- Usable with all other connection accessories, except terminal shields
- Each breaker is delivered with a set of phase barriers (1 for 2 poles, 2 for 3 poles and 3 for 4 poles breaker)
- Additional set of phase barriers available for insulation between outgoings or between 2 side by side mounted breakers.

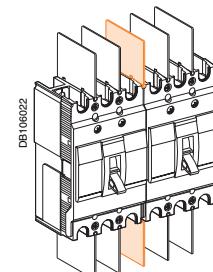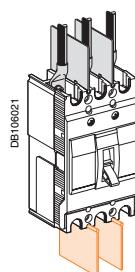

Designation	Cat. no.
EZC100	EZC250/EZCV250
Phase barriers for 60 mm dept (set of 2)	EZAFASB2
Phase barriers for 68 mm dept (set of 3)	EZEFASB2
	EZEFASB3N

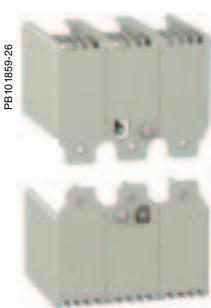


Terminal shield (3P only) for EZC100.

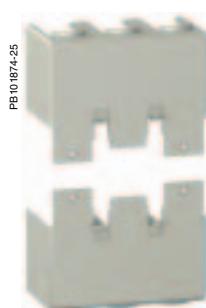

Terminal shield for EZC250/EZCV250.

Terminal shields

- Insulating accessories for protection against direct contact with power circuits
- Designed for front connection only (long terminal shield).

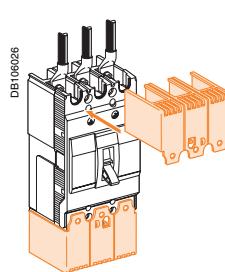

Designation	Cat. no.
EZC100	EZC250/EZCV250
Terminal shield for 3-pole breaker (60 mm depth) (set of 2)	EZATSHD3P
Terminal shield for 3-pole breaker (68 mm depth) (set of 2)	-
Terminal shield for 4-pole breaker (68 mm depth) (set of 2)	EZETSHD4PN



Padlocking device for
EZC100.




Padlocking device for
EZC250/EZCV250.



PB101860-30

DIN rail adaptor

Mounting on a DIN rail is possible using a special adaptor (for EZC100 only).

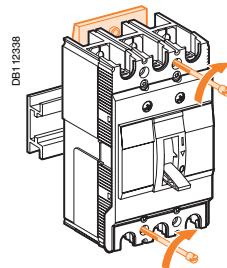

Mounting on DIN rail (optional).


Designation	Cat. no.
EZC100	EZC250/EZCV250
EZADINR	-

Padlocking system


Locking in the OFF position guarantees isolation as per IEC 60947-2.

Padlocking system can receive:

- up to 2 padlocks Ø 5 mm (padlocks not supplied) for EZC100
- up to 3 padlocks Ø 8 mm for EZC250/EZCV250 (padlocks not supplied).

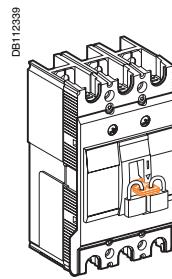


Toggle locking using a removable device:
for EZC100

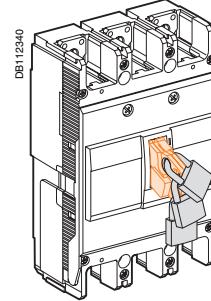

for EZC250/EZCV250

Designation	Cat. no.
EZC100	EZC250/EZCV250
EZALOCK	-
EZELOCK	-
EZELOCKN	-

Sealing screws

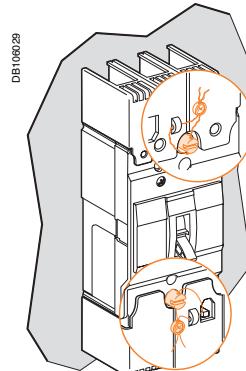

Designation	Cat. no.
Sealing screws (set of 2)	EZC100 EZC250/EZCV250 EZASSCR -




AX and 2 AL.




Signalling switch (AX or AL).



Double signalling switch (2 AX or 2 AL).

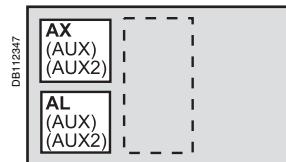Plug-In location location: AX - AL

EZC400-3P.

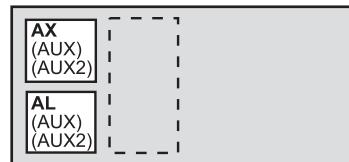

EZC400-4P.

Indication contacts

Provide remote circuit breaker status information.
They can be used for indications, electrical locking, relaying, etc.
Common-point changeover contacts.

Auxiliary switch (ON/OFF)

AX indicates the position of the circuit breaker contacts.

Alarm switch (trip indication)

AL indicates that the circuit breaker has tripped due to:

- an overload
- a short-circuit
- operation of a voltage release.



It returns to de-energised state when the circuit breaker is reset.

Functions (AL or AX) is determined by the mounting location of the auxiliary**Characteristics****Contacts**

Rated thermal current (A)	5			
Minimum load	10 mA at 24 V			
Utilisation category (IEC 60947-5-1)	AC12	AC15	DC12	DC14
Operational current (A)	24 V	5	5	4
	48 V	5	5	2.5
	125 V	5	3	0.4
	250 V	3	2	0.2
				0.2

Connections

Connection wire length	500 mm
Cross-section	1.5 mm ²

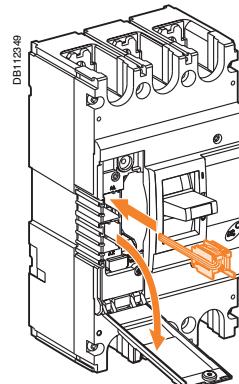

All EasyPact electrical auxiliaries are "snapped in place"

Designation

Designation	Cat. no.
Signalling switch (AX or AL)	EZ4AUX
Double signalling switch (2 AX or 2 AL)	EZ4AUX2



SHT or UVR voltage release.



Shunt Trip SHT.



Shunt Trip UVR.


PB102136-32

PB102169-32


PB102130-13

PB102131-13

Plug-In location location: SHT - UVR

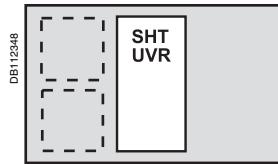

EZC400-3P.

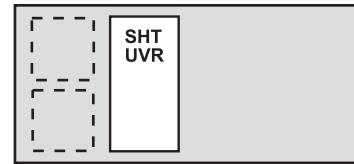

EZC400-4P.

Remote tripping

Shunt Trip (SHT) or Under Voltage Release (UVR).

Shunt Trip (SHT)

- This release trips the circuit breaker when the control voltage rises above $0.7 \times U_n$
- Control signals can be of the impulse type (≥ 20 ms) or maintained.

Under Voltage Release (UVR)

- This release trips the circuit breaker when the control voltage drops below a tripping threshold
- Tripping threshold between 0.35 and 0.7 times the rated voltage
- Circuit breaker closing is possible only if the voltage exceeds 0.85 times the rated voltage
- Circuit breaker tripping by an UVR release meets the requirements of standard IEC 60947-2.

Operation

When the circuit breaker has been tripped by an SHT or UVR release, it must be reset locally:

- SHT or UVR tripping takes priority over manual closing
- in the presence of a standing trip order, closing of the contacts, even temporary, is not possible.

Characteristics

Mechanical

Mechanical endurance 10 % of MCCB mechanical endurance

Electrical

		AC	DC
SHT	pick-up consumption response time	< 30 VA	< 30 VA
UVR	seal-in consumption response time	< 5 VA < 50 ms	< 10 W < 100 ms

Connections

Connection wire length	500 mm
Cross-section	1.5 mm^2

Installation

SHT and UVR: internal mounting



Designation		Cat. no.	
SHT	AC	24-48 V	EZ4SHT048ACDC
Shunt Trip		100-240 V	EZ4SHT200ACDC
Release		277 V	EZ4SHT277AC
		380-480 V	EZ4SHT400AC
UVR	AC	DC	24-48 V
		100-220 V	EZ4SHT200ACDC
UVR	AC	24 V	EZ4UVR024ACDC
		48 V	EZ4UVR048ACDC
		100-110 V	EZ4UVR110ACDC
		120-130 V	EZ4UVR130ACDC
		200-240 V	EZ4UVR200AC
		277 V	EZ4UVR277AC
UVR	DC	380-480 V	EZ4UVR400AC
		24 V	EZ4UVR024ACDC
		48 V	EZ4UVR048ACDC
		125 V	EZ4UVR130ACDC



PB 102132-35

Direct rotary handle**Suitable for Motor Control Centre (MCC) switchboards**

- Degree of protection IP50, IK07.
- The direct rotary handle maintains:
 - suitability for isolation
 - indication of the three positions O (OFF), I (ON) and tripped
 - circuit breaker locking capability in the OFF position by one to three padlocks, (padlock not supplied) shackle diameter Ø8
 - door opening disabled when the circuit breaker is ON
 - circuit breaker closing is disabled if the door is open.

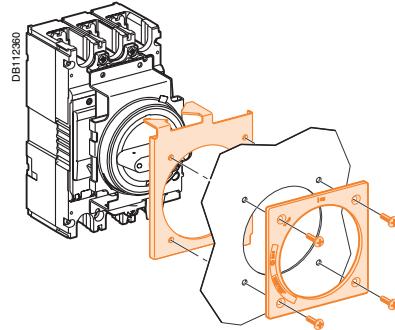IP50**Padlocking**

Designation	Cat. no.
Direct rotary handle	EZ4ROTDS




Extended rotary handle


Makes possible to operate circuit breakers installed at the back of switchboards, from the switchboard front.

- Degree of protection IP54, IK08.
- The extended rotary handle maintains:
 - suitability for isolation
 - indication of the three positions O (OFF), I (ON) and tripped
 - circuit breaker locking capability in the OFF position by one to three padlocks, (padlock not supplied) shackle diameter: Ø8
 - door opening disabled when the circuit breaker is ON.
- The extended rotary handle is made up of:
 - a unit on the front cover of the circuit breaker (secured by screws)
 - an assembly (handle and front plate) on the door that is always secured in the same position, whether the circuit breaker is installed vertically or horizontally
 - an extension shaft that must be adjusted to the distance between back of circuit breaker and door.


IP54

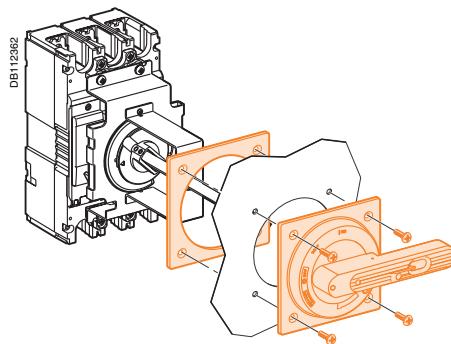

Padlocking



Designation	Cat. no.
Extended rotary handle	EZ4ROTE

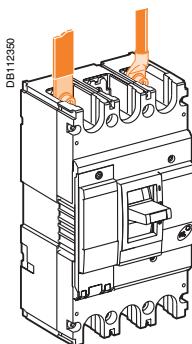
**Standard circuit breaker terminals****All EasyPact circuit breakers are supplied with terminal screws**

EZC400 250 to 400 A

Screw M10

**Connection of insulated bars or cables with lugs**

Bars




L (mm)	≤ 32
h (mm)	$d + 10$
d (mm)	≤ 10
e (mm)	≤ 10
$\bar{\Omega}$ (mm)	10

Crimp lugs

L (mm)	≤ 32
d (mm)	≤ 10
$\bar{\Omega}$ (mm)	10

Tightening torque 30 N.m

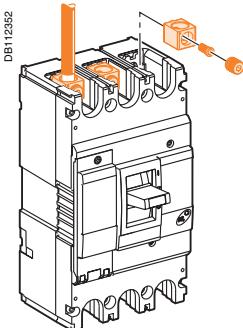**Cable lugs**Cable lugs directly screwed on standard circuit breaker terminals, for cables from 35 to 300 mm².**Designation**

Cable lug up to 400 A (set of 3)

Cat. no.

EZ4LUG4003

Cable lug up to 400 A (set of 4)

EZ4LUG4004





Spreaders.



Terminal extensions.

Spreaders

Increases the pitch of the circuit breaker terminals to 70 mm.

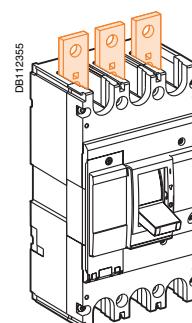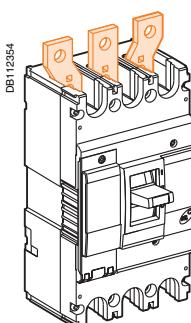Terminal extensions**Designation**

Spreaders 70 mm (set of 3)

Cat. no.

EZ4SPDR73P

Spreaders 70 mm (set of 4)


EZ4SPDR74P

Terminal Extensions (set of 3)



EZ4TEX3P

Terminal Extensions (set of 4)


EZ4TEX4P

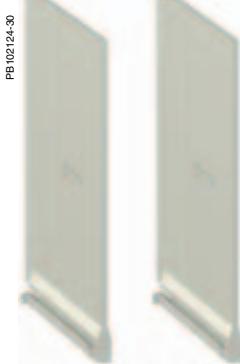**Phase barriers**


- Safety accessories for maximum insulation at the power connection points
- Usable with all other connection accessories, except terminal shields
- Each breaker is delivered with a set of phase barriers (2 for 3 poles and 3 for 4 poles breaker)
- Additional set of phase barriers available for insulation between outgoings or between 2 side by side mounted breakers.

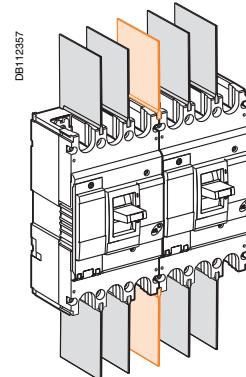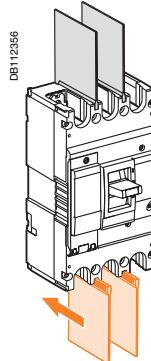

Designation	Cat. no.
Phase barriers for 3-pole breaker (set of 2)	EZ4FASB2
Phase barriers for 4-pole breaker (set of 3)	EZ4FASB3

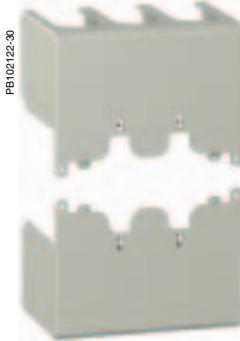**Terminal shields**


- Insulating accessories for protection against direct contact with power circuits
- Designed for front connection only (long terminal shield).

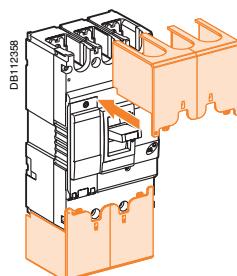

Designation	Cat. no.
Terminal shield for 3P (set of 2 parts)	EZ4TSHD3P
Terminal shield for 4P (set of 2 parts)	EZ4TSHD4P

**Padlocking system**

Locking in the OFF position guarantees isolation as per IEC 60947-2.
Padlocking system can receive up to 3 padlocks Ø8 mm (padlocks not supplied).



Designation	Cat. no.
Padlocking system	EZ4LOCK

Guiding

TOOLS

merlin-gerin.com

This international site allows you to access all the Merlin Gerin products in just 2 clicks via comprehensive range data-sheets, with direct links to:

- complete library: technical documents, catalogs, FAQs, brochures...
- selection guides from the e-catalog.
- product discovery sites and their Flash animations.

You will also find illustrated overviews, news to which you can subscribe, the list of country contacts...




CAD software and tools

The CAD software and tools enhance productivity and safety. They help you create your installations by simplifying product choice through easy browsing in the Guiding System offers. Last but not least, they optimise use of our products while also complying with standards and proper procedures.




<i>Presentation</i>	6
<i>Circuit breakers</i>	9
Dimensions	48
EasyPact 100	48
EasyPact 250	50
EasyPact 400	52
EasyPact 100 accessories	54
EasyPact 250 accessories	55
EasyPact 400 accessories	56
Safety clearances and minimum distances	57
Temperature derating	59
Tripping curves	60
Current-limiting curves	62
Cascading	63
Cascading tables	64
Motor protection	66
Capacitor protection	68
<i>Busbars</i>	71


Dimensions

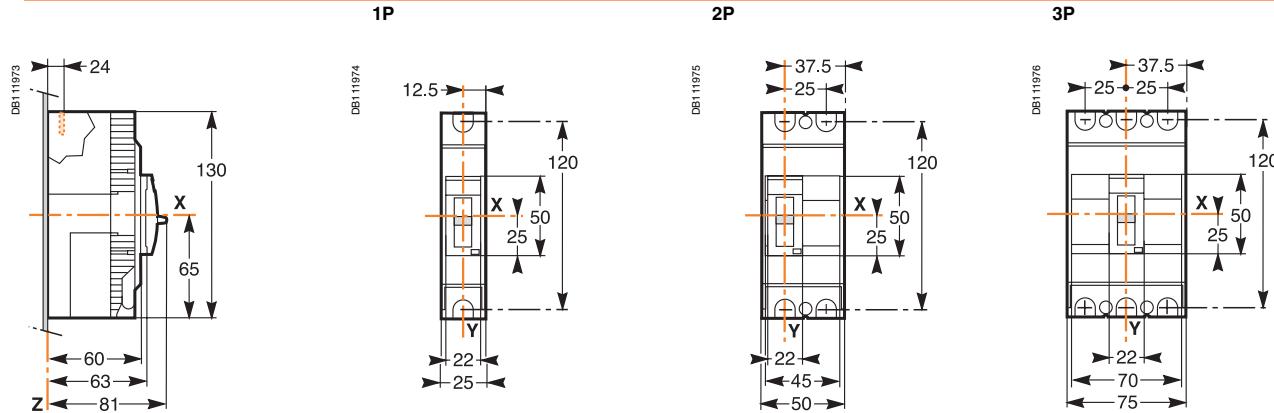


Mounting on plate

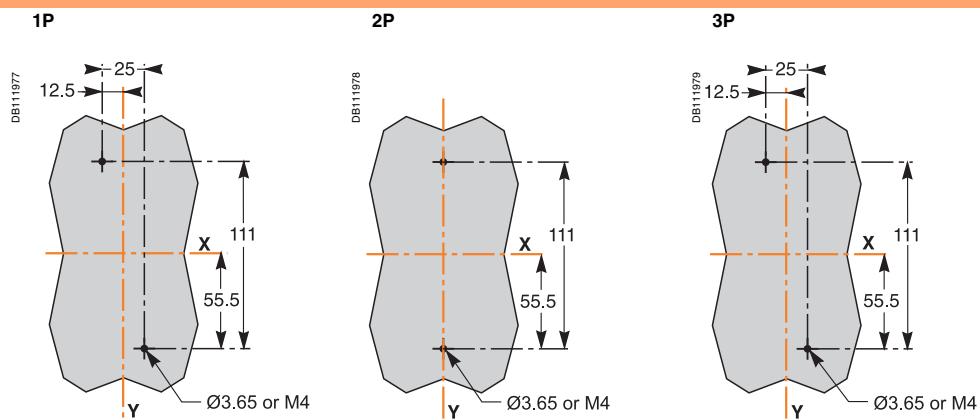


Mounting on DIN rail

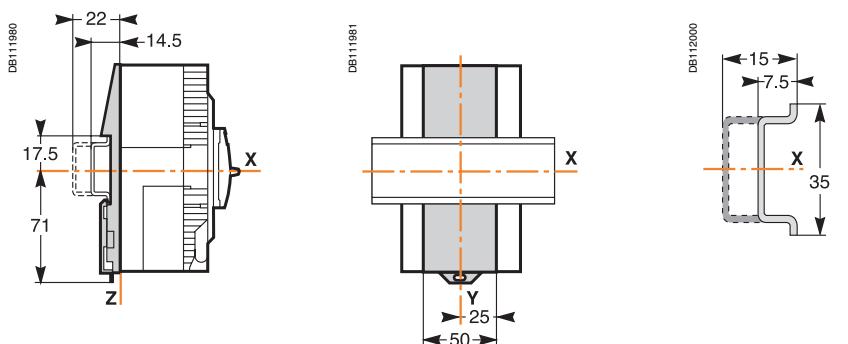

Door cut-out (small)

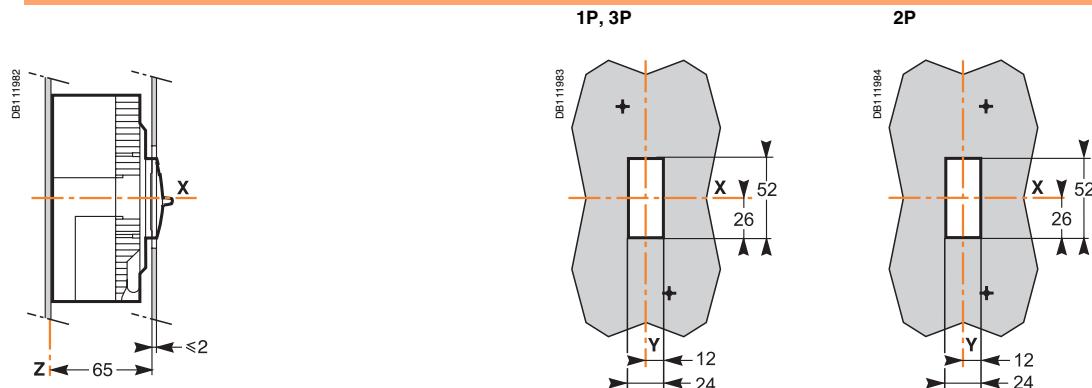

Door cut-out (large)

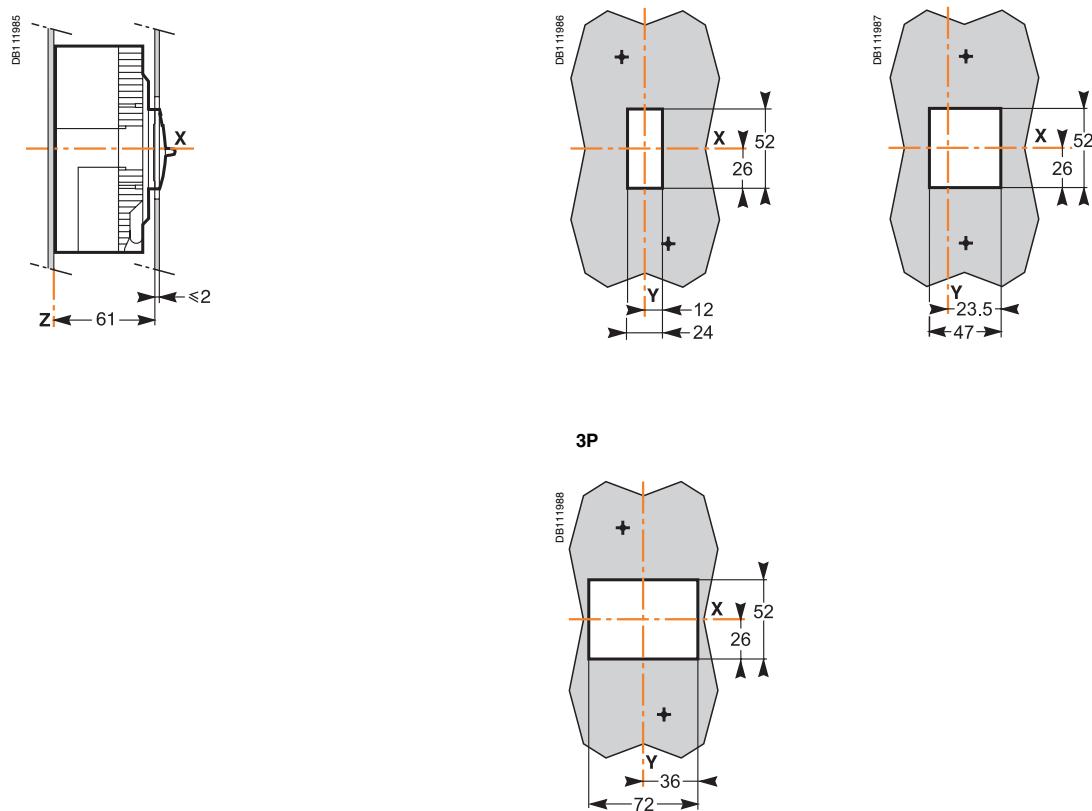


Dimensions


EasyPact 250

EZC250/EZCV250


Dimensions (EZC250)

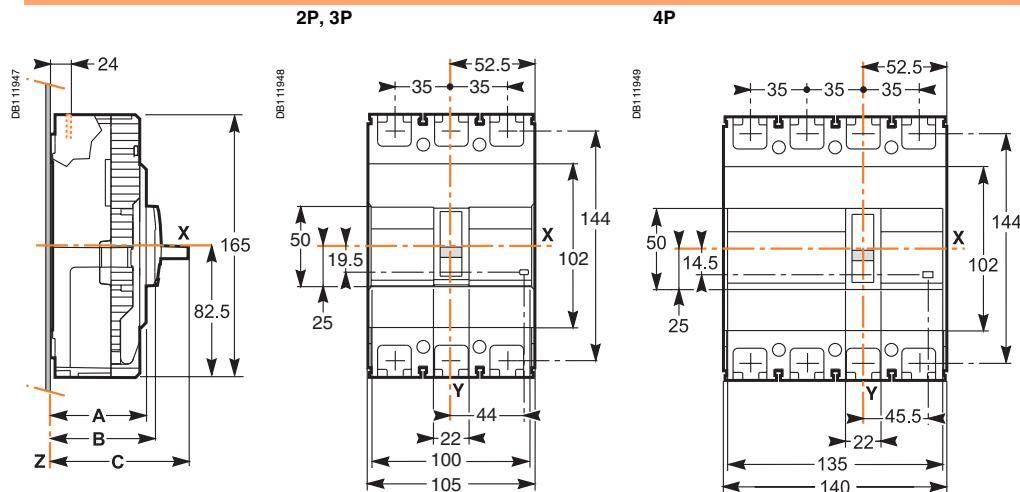

Dimensions (EZCV250)

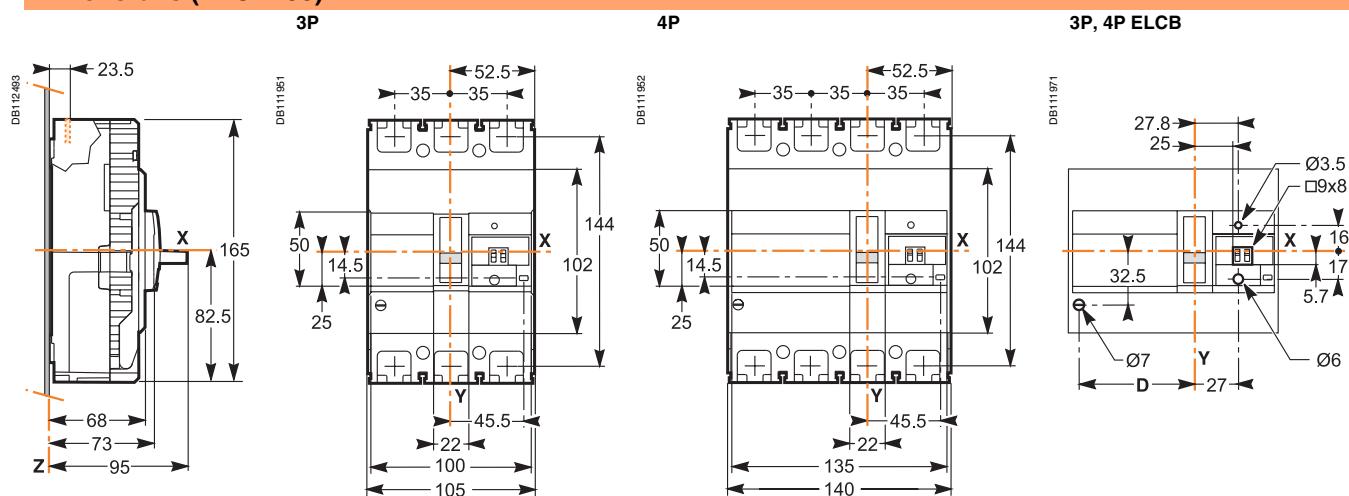

Mounting on plate

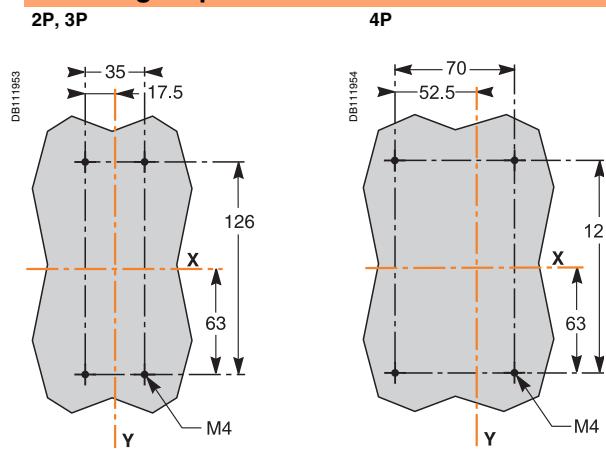


Dimensions


EasyPact 250

EZC250/EZCV250

Door cut-out (small)

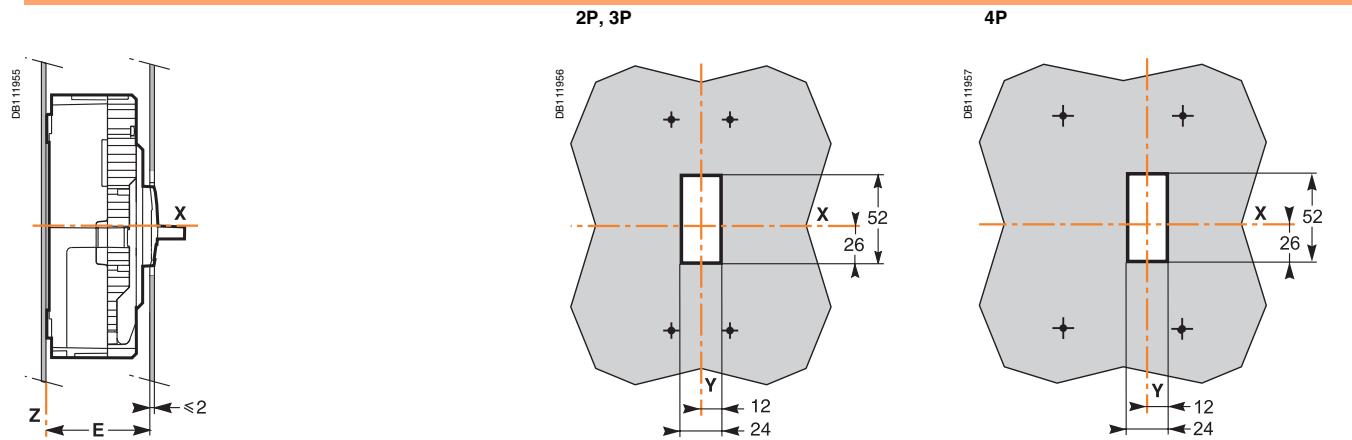




Door cut-out (large)

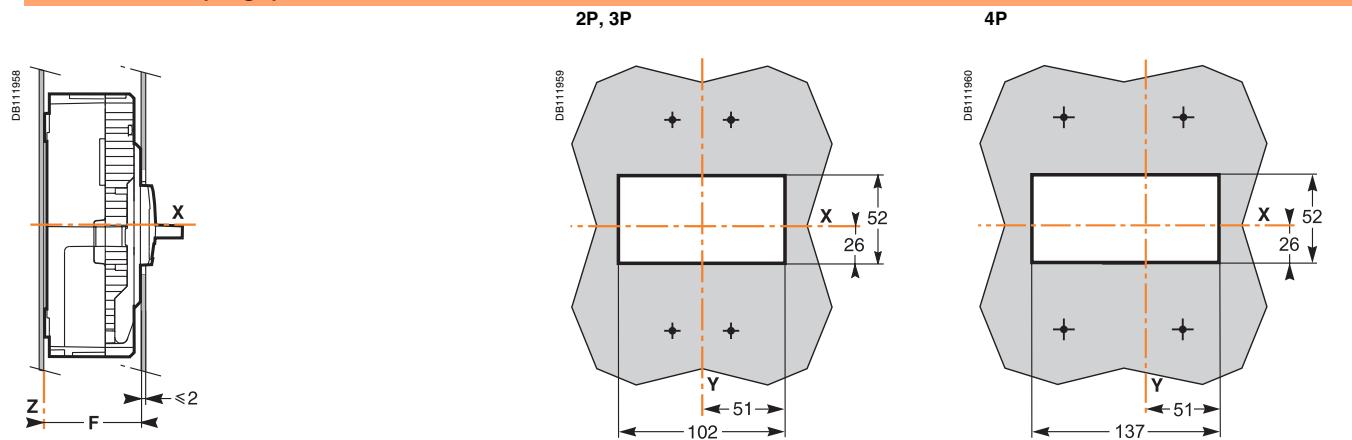



Dimensions (mm)

	A	B	C	D	E	F
EZC 2/3P	60	65	85.5	-	67	61
EZC 4P	68	73	95	-	75	69
EZCV 3P			45.5			
EZCV 4P			80.5			


Dimensions

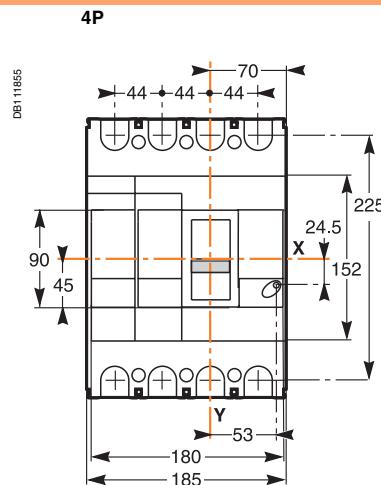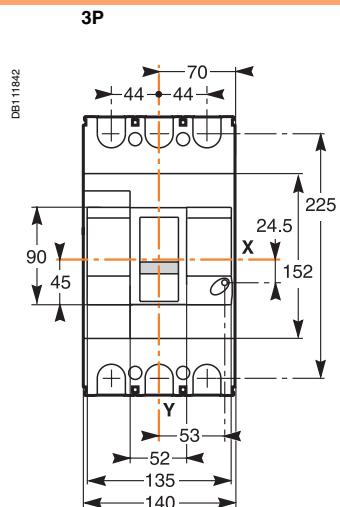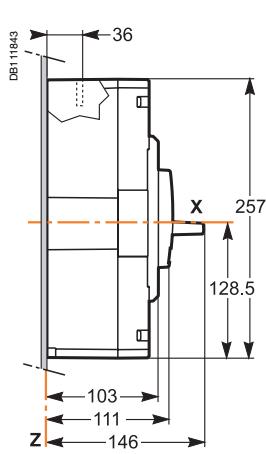


Mounting on plate

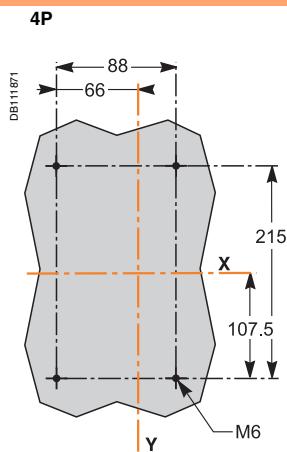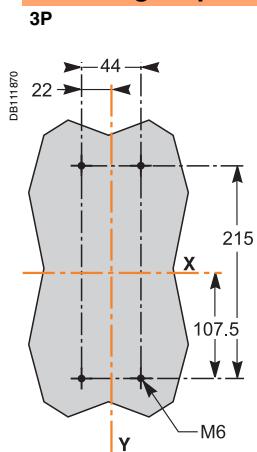



Door cut-out (small)

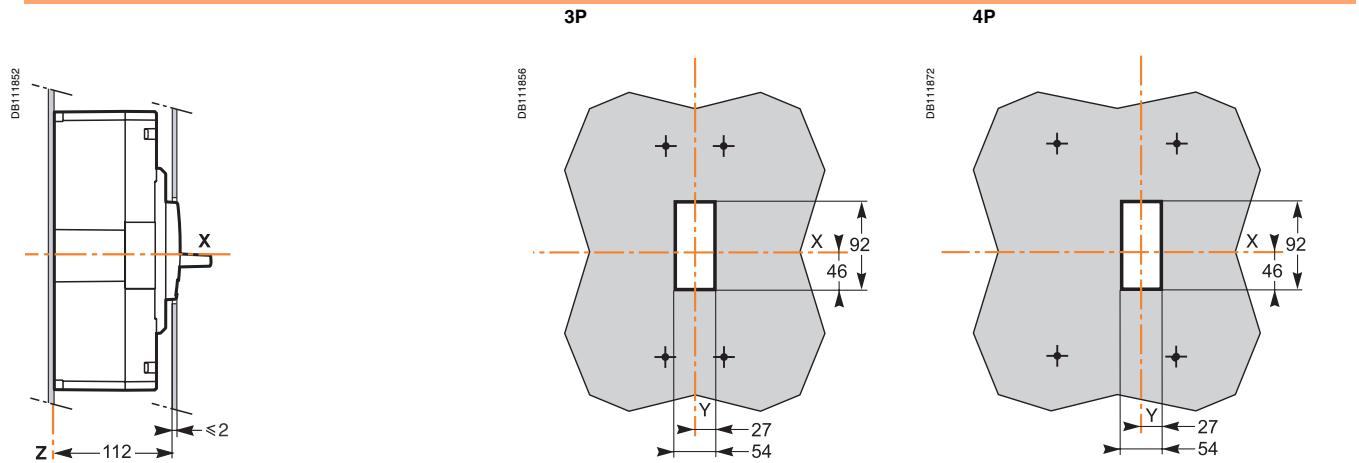




Door cut-out (large)

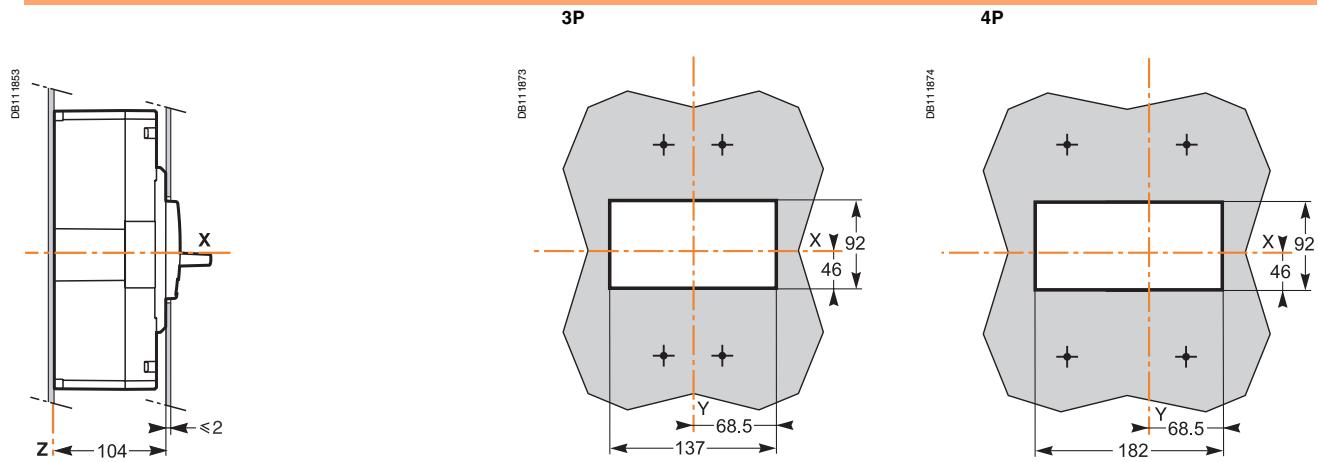

Terminal shields


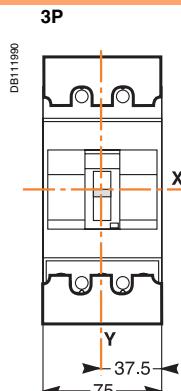
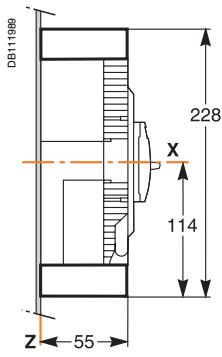


Phase barriers

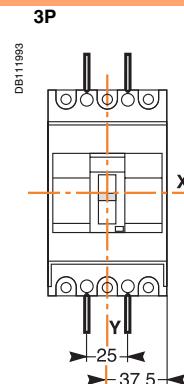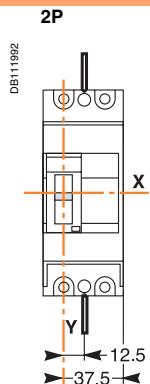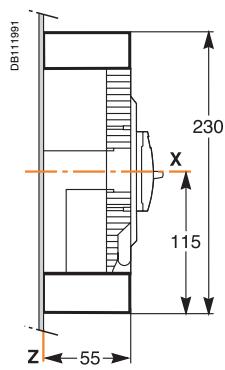




Direct rotary handle

Dimensions

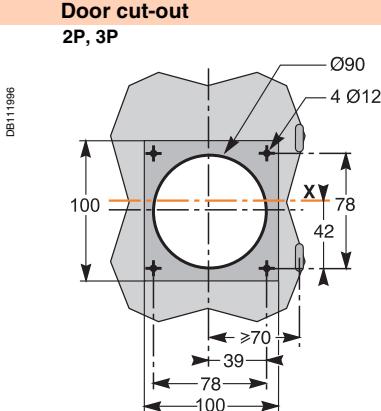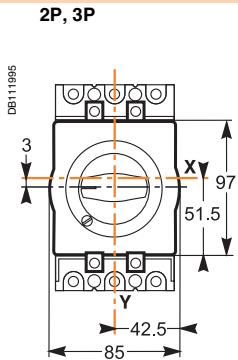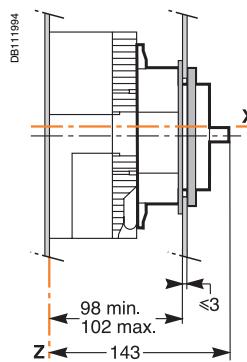


Extended rotary handle


Dimensions

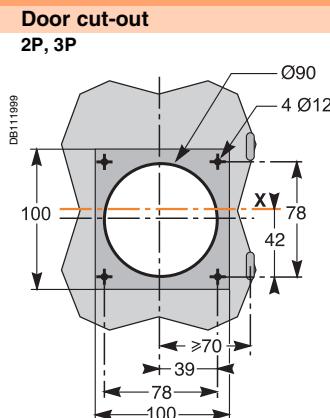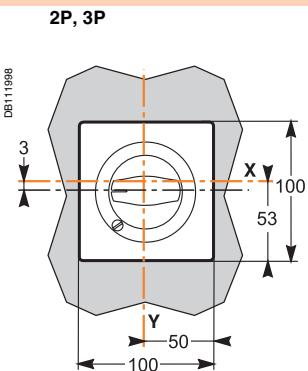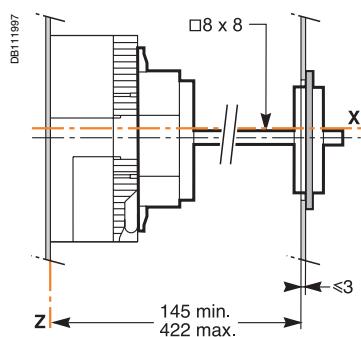


Terminal shields

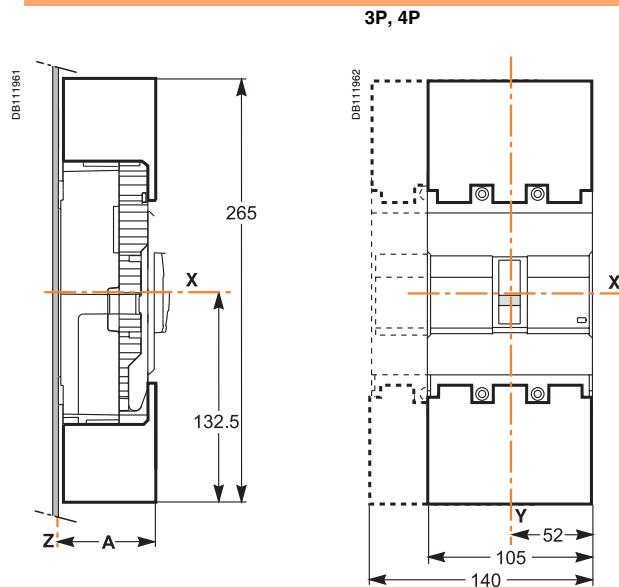


Phase barriers

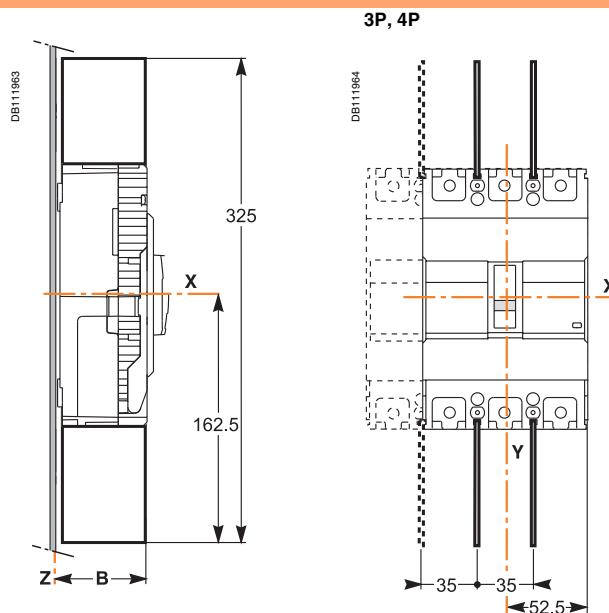

Direct rotary handle

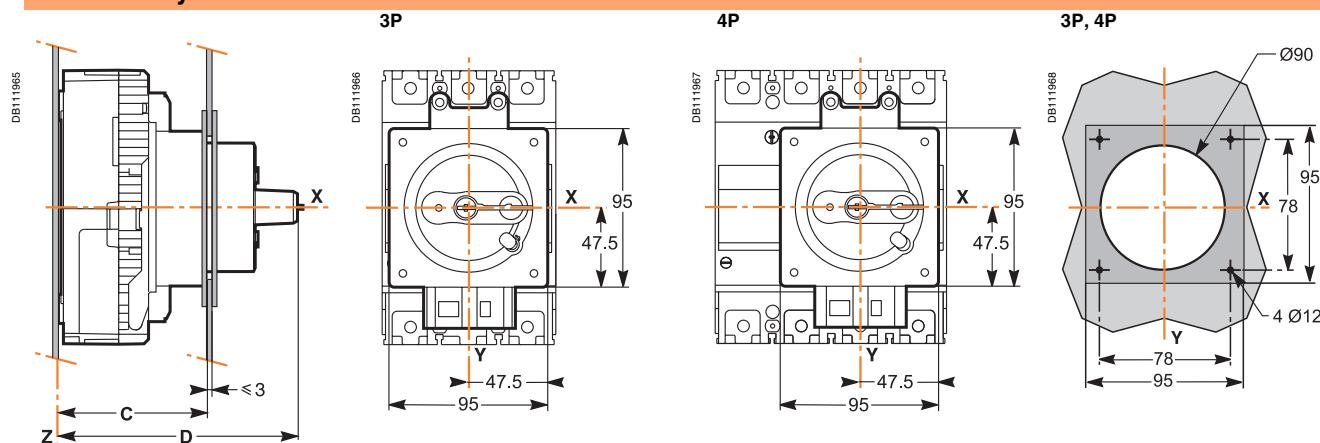


Extended rotary handle

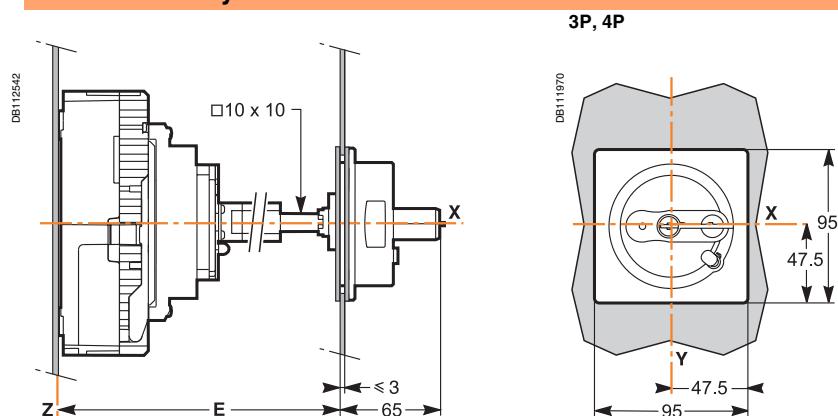


Dimensions (mm)

	A	B	C	D	E
EZC 2/3P	58.5	55	93 to 97	145	137 to 414
EZC 4P	66.5	63	101 to 105	153	145 to 422
EZCV 3P/4P					


Terminal shields

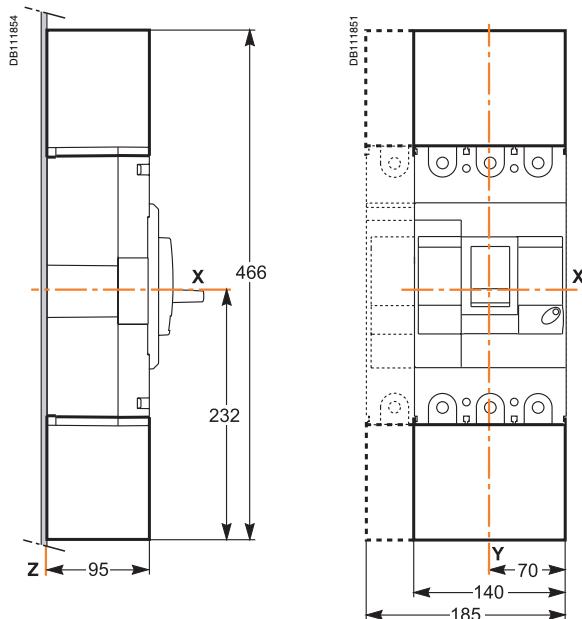



Phase barriers

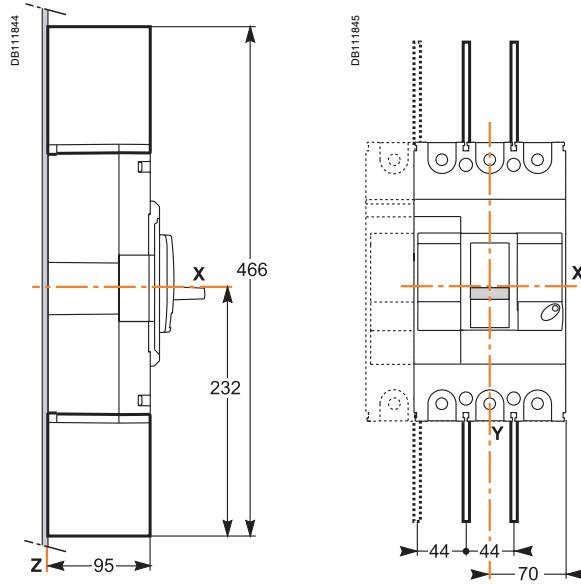

Direct rotary handle

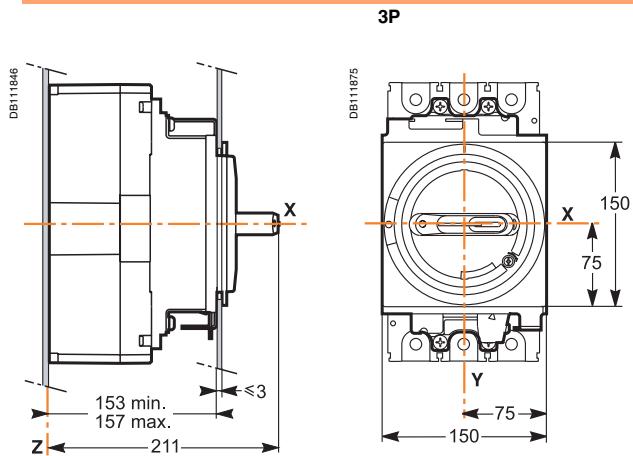

Extended rotary handle


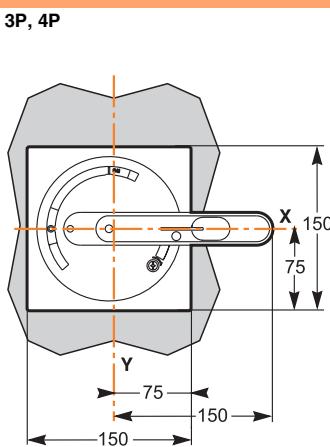
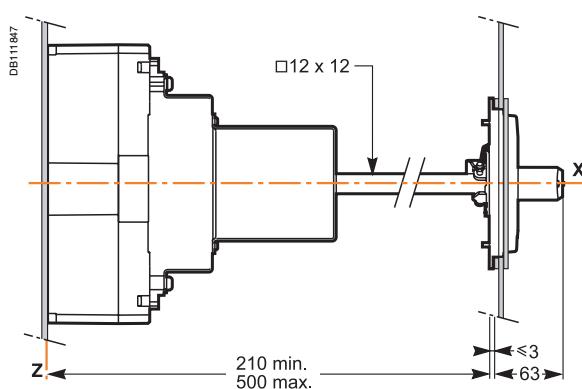


EasyPact

When installing a circuit breaker, minimum distances (safety clearances) must be maintained between the device and panels, bars and other protection devices installed nearby. These distances, which depend on the ultimate breaking capacity, are defined by tests carried out in accordance with standard IEC 60947-2. If installation conformity is not checked by type tests, it is also necessary to:


- use insulated bars for circuit-breaker connections
- block off the busbars using insulating screens.

For EasyPact breaker, terminal shields, inter-phase barriers or an insulation isolator are recommended and may be mandatory depending on the utilisation voltage and the type of installation.

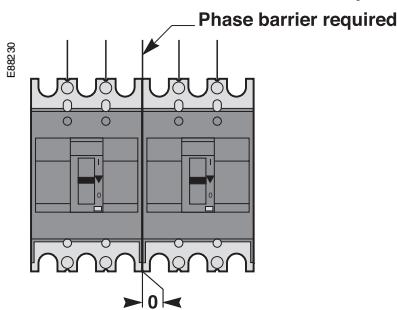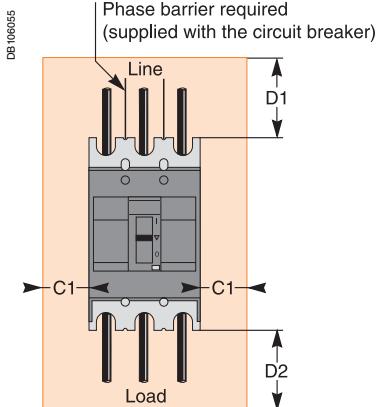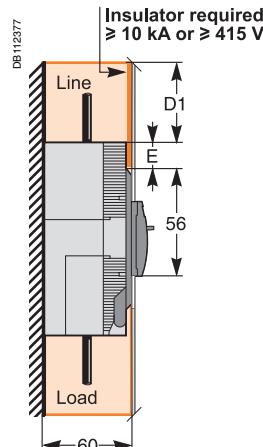Minimal distance between two adjacent circuit breakers**Minimal distance between the circuit breaker and top, bottom or side panels****Minimal distance between the circuit breaker and front or rear panels**

Dimensions (mm)	Bare or painted sheet metal: insulated bars			Bare busbar under voltage		
EasyPact circuit breaker	C1	D1	D2	D1	D2	E
EZC100B/F/N	40	45	45	75	45	40
EZC100H	40	60	45	75	45	40
EZC250F/N-EZCV250N	50	60	45	140	45	42.5
EZC250H-EZCV250H	50	80	45	140	45	42.5
EZC400N	50	120	100	250	100	40
EZC400H	80	140	100	250	100	40

The mandatory distances when installing EasyPact circuit breakers are calculated from the device case, not taking into account the terminal shields or the inter-phase barriers.



Installation in an enclosure.

Installation in an enclosure

EasyPact circuit breakers can be installed in a metal enclosure together with other devices (contacts, motor-protection circuit breakers, LEDs, etc.).

Minimum enclosure dimensions

Circuit breakers	Height (mm)	Depth (mm) (*)	Width (mm)
EZC100B/F/N	200	90	155
EZC100H	215	90	155
EZC250F/N-EZCV250N	270	90	205
EZC250H-EZCV250H	290	90	205
EZC400N	480	160	240
EZC400H	500	160	300

(*) with front door.










Ambient temperature






EasyPact devices are equipped with fixed thermal-magnetic trip units.

- EasyPact has been particularly designed to hold 100 % In at 50 °C without tripping in normal condition
- EasyPact circuit breakers may be used between -25 °C and +70 °C
- EasyPact circuit breakers should be put into service under normal ambient operating temperature conditions. Exceptionally, the circuit breaker may be put into service when the ambient temperature is between -35 °C and -25 °C
- the permissible storage-temperature range for EasyPact circuit breakers in the original packing is -35 °C to +85 °C.


To determine tripping times using time/current curves, use Ir values corresponding to the thermal setting on the device, corrected as indicated in the tables below.

Rated current (A)	25°C	40°C	45°C	50°C	55°C	60°C	65°C	70°C
EZC100								
15	17.0	15.7	15.3	15.0	14.7	14.6	14.2	13.8
16	18.1	16.7	16.3	16.0	15.7	15.6	15.1	14.7
20	21.8	20.4	20.2	20.0	19.7	19.2	18.9	18.5
25	26.9	25.7	25.3	25.0	24.7	24.5	24.3	24.0
30	34.5	31.4	30.7	30.0	29.4	29.1	28.5	28.0
32	36.8	33.5	32.7	32.0	31.4	31.0	30.4	29.9
40	42.8	40.9	40.4	40.0	39.5	38.0	37.6	37.1
45	48.8	46.9	45.9	45.0	44.4	43.3	42.6	41.9
50	54.2	52.1	51.0	50.0	49.3	48.1	47.3	46.6
60	64.4	61.8	60.9	60.0	59.0	57.5	56.6	55.7
63	67.6	64.9	63.9	63.0	62.0	60.4	59.4	58.5
75	78.6	76.8	75.9	75.0	73.5	70.4	69.8	69.1
80	84.4	82.2	81.1	80.0	78.6	77.3	76.7	76.1
100	109	103	101	100	99	94	94	93
EZC250								
63	77	69	66	63	60	56	53	49
80	93	86	83	80	77	74	71	68
100	115	106	103	100	96	93	89	85
125	148	135	130	125	120	114	109	103
150	174	160	155	150	145	139	134	128
160	186	171	166	160	154	148	142	136
175	207	188	182	175	168	161	153	145
200	236	215	208	200	192	184	175	166
225	268	244	235	225	215	205	194	182
250	297	270	260	250	239	228	215	203
EZCV250								
63	72	63	60	56	53	49	44	39
80	89	80	77	73	70	66	62	58
100	113	100	95	91	86	80	74	68
125	140	125	120	114	108	102	95	88
150	163	150	145	141	136	131	125	120
160	177	160	154	148	141	135	127	120
175	194	175	168	161	154	146	138	126
200	223	200	192	183	175	165	155	144
225	245	225	218	211	203	196	180	162
250	277	250	240	230	220	209	198	180
EZC400								
250	293	268	260	250	240	228	218	208
300	351	321	312	300	288	273	261	249
320	374	342	333	320	307	291	278	266
350	410	375	364	350	336	319	305	291
400	468	428	416	400	384	364	348	332

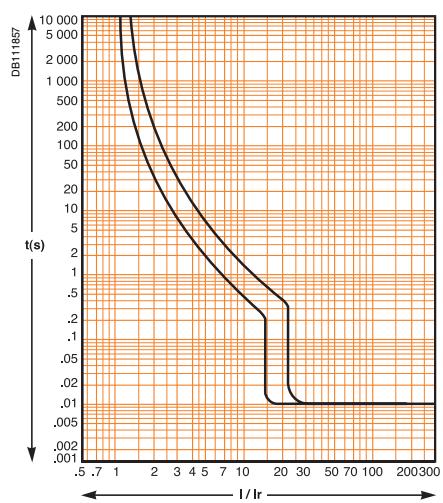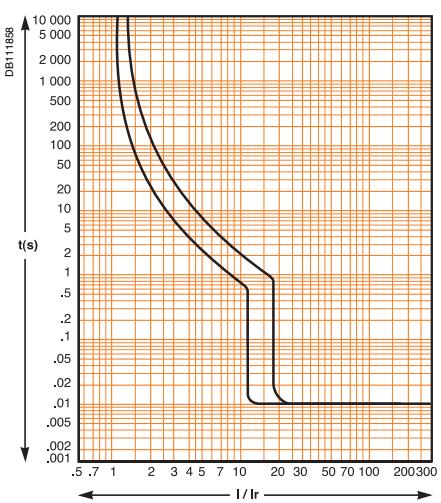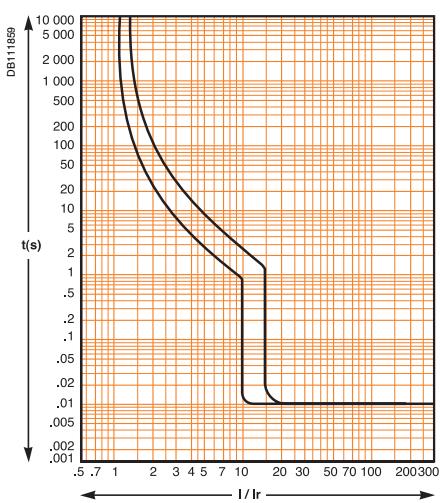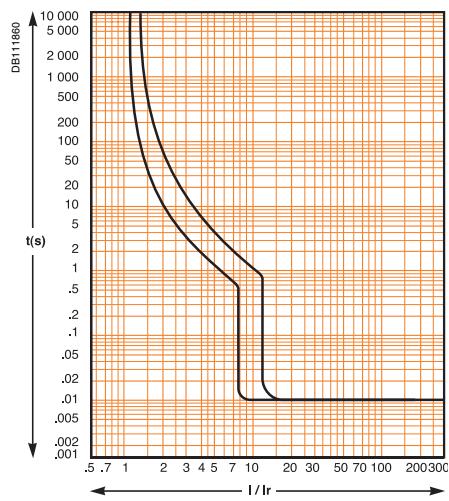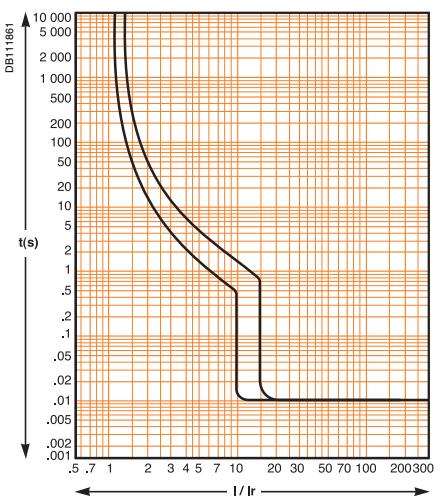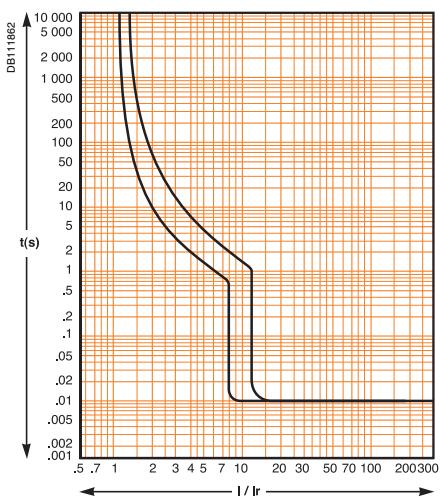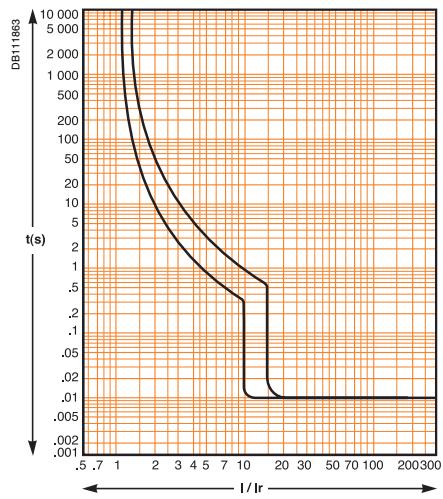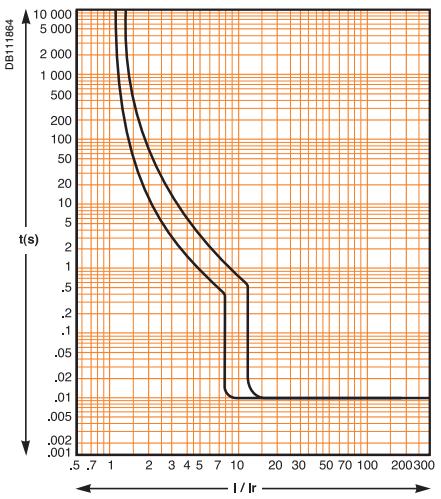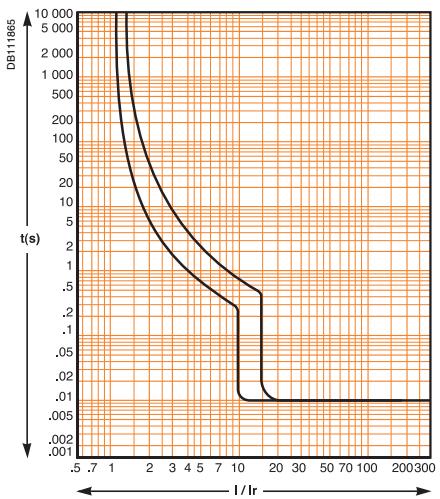EasyPact 100 TM magnetic trip units**15-16 A****20 A****25 A****30-32 A****40 A****45-50 A****60-63 A****75 A****80 A**

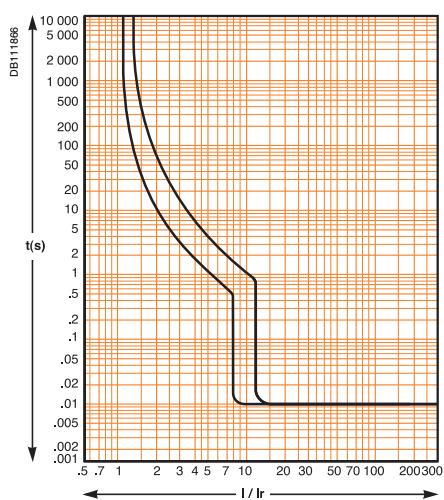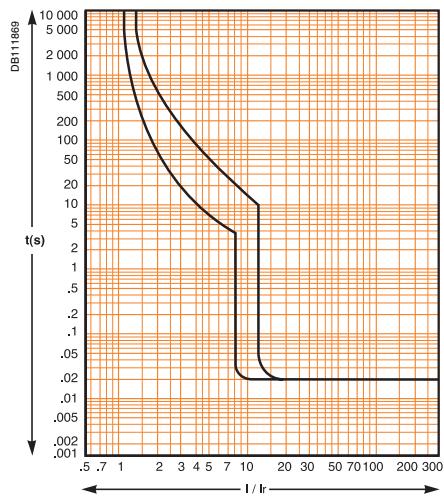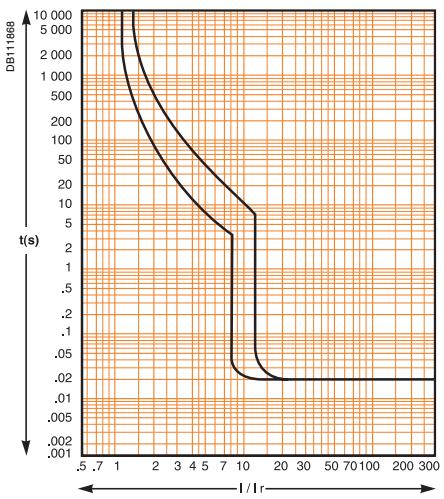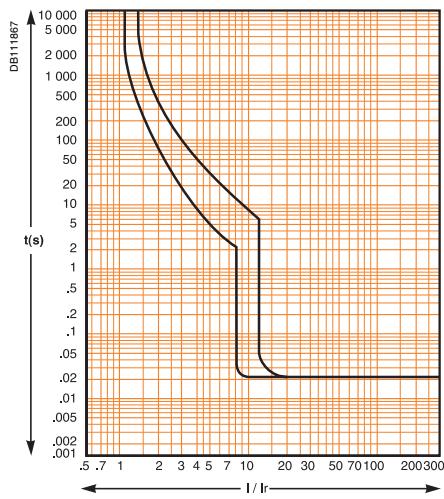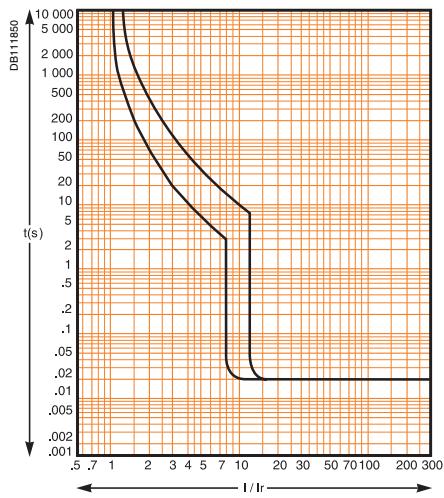EasyPact 100 TM magnetic trip units (cont.)**100 A****EasyPact 250 TM magnetic trip units****100-125 A****150-160-175-200 A****225-250 A****EasyPact 400 TM magnetic trip units****250-300-320-350-400 A**

The limiting capacity of a circuit breaker is its aptitude to limit short-circuit currents.

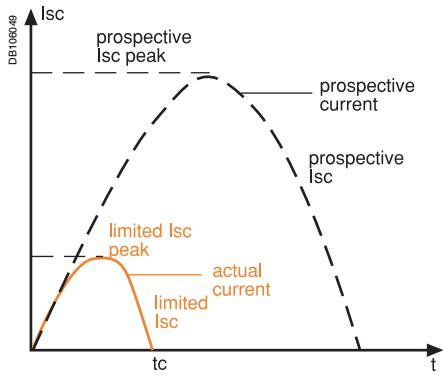

The exceptional limiting capacity of the EasyPact range greatly reduces the forces created by fault currents in devices. The result is a major increase in breaking performance.

The I_{cs} value, defined by IEC standard 60947-2, is guaranteed by tests comprising the following operations:

- break three times consecutively a fault current equal from 25% to 100% of I_{cu}
- check that the device continues to function normally:
- it conducts the rated current without abnormal temperature rises
- protection functions perform within the limits specified by the standard
- suitability for isolation is not impaired.

Longer service life of electrical installations

Current-limiting circuit breakers greatly reduce the negative effects of short-circuits on installations.

Thermal effects

Less temperature rise in conductors, therefore longer service life for cables.

Mechanical effects

Reduced electrodynamic forces, therefore less risk of electrical contacts or busbars being deformed or broken.

Electromagnetic effects

Less disturbances for measuring devices located near electrical circuits.

Economy by means of cascading

Cascading is a technique directly derived from current limiting. Circuit breakers with breaking capacities less than the prospective short-circuit current may be installed downstream of a limiting circuit breaker. The breaking capacity is reinforced by the limiting capacity of the upstream device.


It follows that substantial savings can be made on downstream equipment and enclosures.

Current-limiting curves


The current-limiting capacity of a circuit breaker is expressed by two curves which are a function of the prospective short-circuit current (the current which would flow if no protection devices were installed):

- the actual peak current (limited current),
- thermal stress ($A^2 s$), i.e. the energy dissipated by the short-circuit in a conductor with a resistance of 1Ω .

Current limiting curves 380/415 V AC

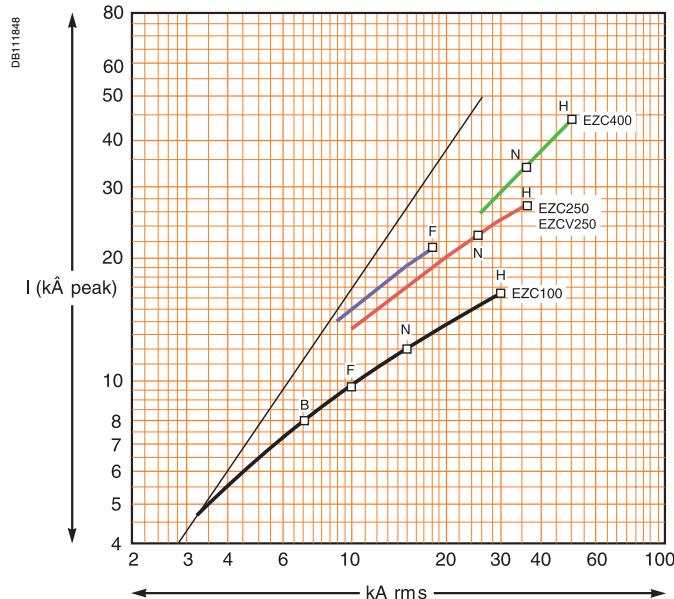

Thermal-stress curves 380/415 V AC

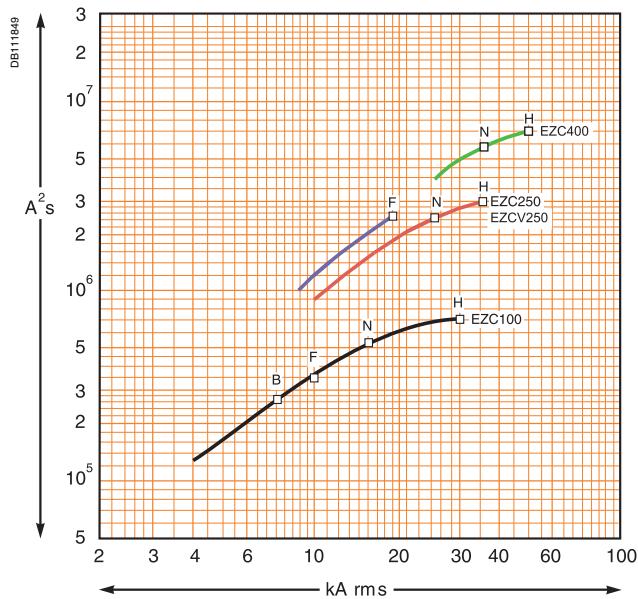

What is cascading?

Cascading is the use of the current limiting capacity of circuit breakers at a given point to permit installation of lower-rated and therefore lower-cost circuit breakers downstream.

The upstream compact circuit breakers acts as a barrier against short-circuit currents. In this way, downstream circuit breakers with lower breaking capacities than the prospective short-circuit (at their point of installation) operate under their normal breaking conditions.

Since the current is limited throughout the circuit controlled by the limiting circuit breaker, cascading applies to all switchgear downstream. It is not restricted to two consecutive devices.

General use of cascading

With cascading, the devices can be installed in different switchboards. Thus, in general, cascading refers to any combination of circuit breakers where a circuit breaker with a breaking capacity less than the prospective I_{sc} at its point of installation can be used. Of course, the breaking capacity of the upstream circuit breaker must be greater than or equal to the prospective short-circuit current at its point of installation.

The combination of two circuit breakers in cascading configuration is covered by the IEC 60947-2.

Coordination between circuit breakers

The use of a protective device possessing a breaking capacity less than the prospective short-circuit current at its installation point is permitted as long as another device is installed upstream with at least the necessary breaking capacity. In this case, the characteristics of the two devices must be coordinated in such a way that the energy let through by the upstream device is not more than that which can be withstood by the downstream device and the cables protected by these devices without damage.

Cascading can only be checked by laboratory tests and the possible combinations can be specified only by the circuit breaker manufacturer.

220/240 V network downstream from a 380/415 V network

For 1P + N or 2P circuit breakers connected between the phase and neutral on a 380/415 V network, with a TT or TNS neutral system, consult the 220/240 V cascading table to determine cascading possibilities between upstream and downstream circuit breakers.

Economy by means of cascading


Thanks to cascading, circuit breakers with breaking capacities less than the prospective short-circuit current may be installed downstream from a current limiting circuit breaker.

It follows that substantial savings can be made on downstream switchgear and enclosures.

Cascading tables

Merlin Gerin cascading tables are:

- drawn up on the basis of calculations (comparison between the energy limited by the upstream device and the maximum permissible thermal stress for the downstream device)
 - verified experimentally in accordance with IEC standard 60947-2.
- For distribution systems with 220/240 V, 380/415 V and 440 V between phases, the tables of the following pages indicate cascading possibilities between upstream Compact/EasyPact and downstream Multi 9 and EasyPact circuit breakers.

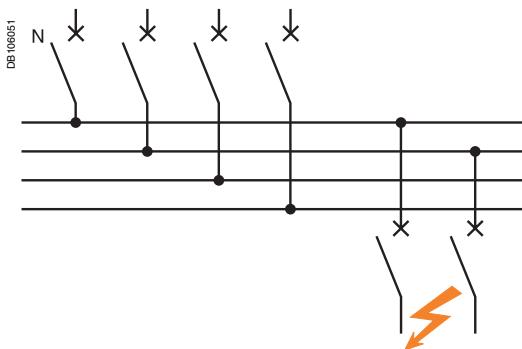

DB106160

**Network 220/240 V**

Upstream	EZC100F	EZC100N	EZC100H
Breaking capacity kA rms	25	25	100
Enhanced breaking capacity			
NC45	6	10	15
NC45N	10	15	25
NC45H	15	25	50
C60a	10	25	50
C60N	20	25	65
C60H	30	-	65
QO-E	10	25	50


Upstream

Upstream	EZC250F	EZC250N	EZC250H	NS250H
Breaking capacity kA rms	25	50	85	100
Enhanced breaking capacity				
EZC100B	10	-	15	20
EZC100F	25	-	30	30
EZC100N	25	-	30	50
EZC100H	100	-	-	-

Upstream	EZ400N	EZ400H	NB400	NS400N	NS400H
Breaking capacity kA rms	85	100	85	85	100
Enhanced breaking capacity					
EZC100B	10	20	20	20	20
EZC100F	25	50	50	50	50
EZC100N	25	50	50	50	50
EZC100H	100	-	-	-	-
EZC250F	25	50	50	50	50
EZC/EZCV250N	50	85	85	85	85
EZC/EZCV250H	85	-	100	-	100

Network 380/415 V

DB106160

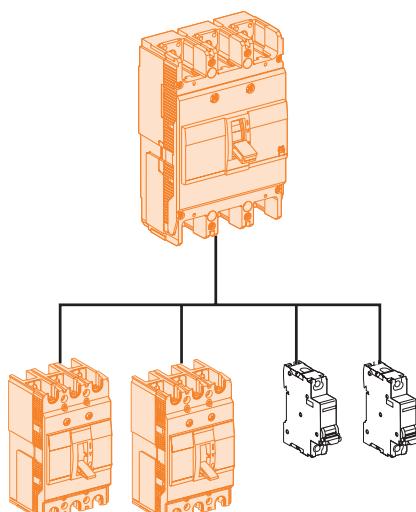**Upstream**

Upstream	EZC100F	EZC100N	EZC100H
Breaking capacity kA rms	10	15	30
Enhanced breaking capacity			
NC45	5	6	15
NC45N	8	10	15
NC45H	10	-	15
C60a	6	10	15
C60N	10	-	15
C60H	15	-	15
QO-E	5	10	15
GV2M	15	-	-

Upstream


Upstream	EZC250F	EZC250N	EZC250H	NS250H
Breaking capacity kA rms	18	25	36	70
Enhanced breaking capacity				
EZC100B	7.5	-	-	15
EZC100F	10	-	15	30
EZC100N	15	-	20	50
EZC100H	30	-	-	70

Upstream	EZ400N	EZ400H	NB400	NS400N	NS400H
Breaking capacity kA rms	36	50	30	50	70
Enhanced breaking capacity					
EZC100B	7.5	-	-	-	-
EZC100F	10	-	-	-	-
EZC100N	15	20	20	20	30
EZC100H	30	36	36	45	50
EZC250F	18	20	20	20	20
EZC/EZCV250N	25	36	36	36	40
EZC/EZCV250H	36	-	-	45	50

Network 440 V

Upstream	EZC250F	EZC250N EZCV250N	EZC250H EZCV250H
Breaking capacity kA rms	15	20	25
Downstream	Enhanced breaking capacity		
EZC100B	5	-	-
EZC100F	7.5	-	-
EZC100N	10	-	15
EZC100H	20	-	-

Upstream	EZ400N	EZ400H	NB400 NB630	NS400N NS630N	NS400H NS630H
Breaking capacity kA rms	20	40	30	42	65
Downstream	Enhanced breaking capacity				
EZC100B	5	-	-	-	-
EZC100F	7.5	-	-	-	-
EZC100N	10	15	15	15	15
EZC100H	25	-	30	30	30
EZC250F	15	20	20	-	-
EZC/EZCV250N	20	-	25	25	25
EZC/EZCV250H	25	-	30	30	30

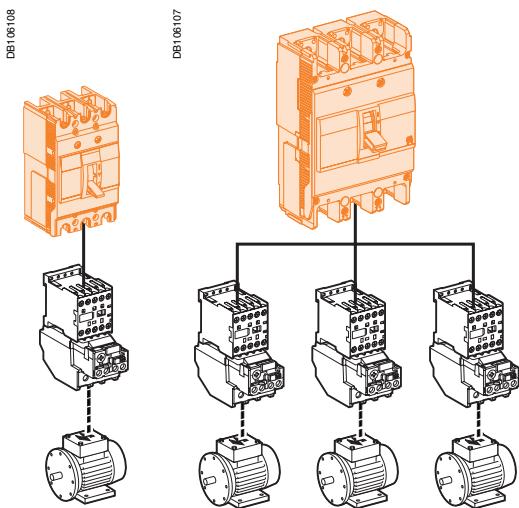

A circuit supplying a motor may include one, two, three or four switchgear or controlgear devices fulfilling one or more functions.

When a number of devices are used, they must be coordinated to ensure optimum operation of the motor.

Protection of a motor circuit involves a number of parameters that depend on:

- the application (type of machine driven, operating safety, starting frequency, etc.)
- the level of service continuity imposed by the load or the application
- the applicable standards to ensure protection of life and property.

The necessary electrical functions are of very different natures:

- short circuit protection
- overload protection dedicated for motor
- control (generally with high endurance levels)
- isolation.

Protection functions

Disconnection functions:

Isolate a motor circuit prior to maintenance operations.

Short-circuit protection:

Protect the starter and the cables against major overcurrents ($> 10 \text{ In}$).

Control:

Start and stop the motor and, if applicable:

- gradual acceleration
- speed control.

Overload protection:

Protect the starter and the cables against minor overcurrents ($< 10 \text{ In}$).

Additional specific protection:

- limitative fault protection (while the motor is running)
- preventive fault protection (monitoring of motor insulation with motor off).

Overloads ($I < 10 \text{ In}$)

An overload may be caused by:

- an electrical problem, for instance on the mains (loss of a phase, voltage outside tolerances, etc.)
- a mechanical problem, for instance excessive torque due to abnormally high demands by the process or motor damage (bearing vibrations, etc.).

A further consequence of these two origins is excessively long starting.

Impedance short-circuit ($10 < I < 50 \text{ In}$)

Deterioration of motor-winding insulation is the primary cause.

Short-circuit ($I > 50 \text{ In}$)

This type of fault is relatively rare. A possible cause may be a connection error during maintenance.

Overload protection

Thermal relays provide protection against this type of fault. They may be:

- integrated in the short-circuit protective device
- separate.


Short-circuit protection

This type of protection is provided by a circuit breaker.

Protection against insulation faults

This type of protection may be provided by:

- a residual current device (RCD)
- an insulation monitoring device (IMD).

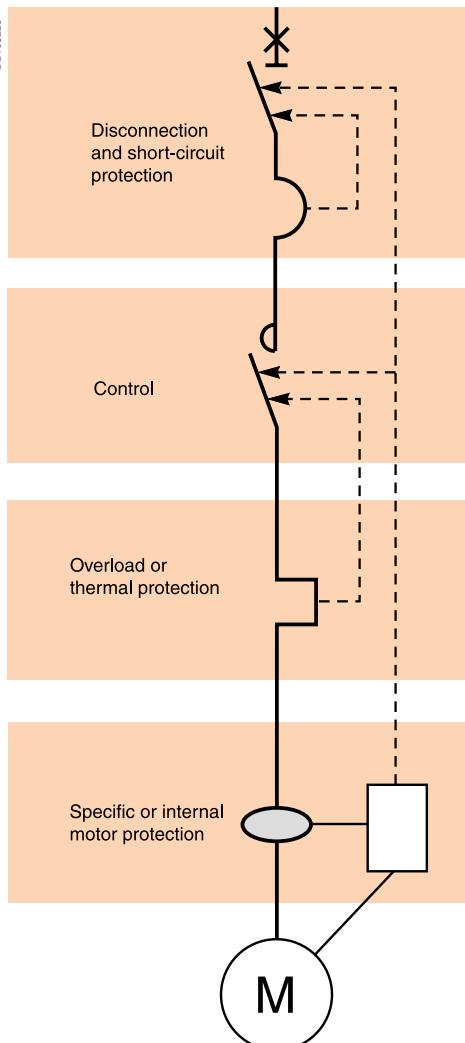

Motor protection - circuit breaker selection

Motors P (kW)	220/230 V		240 V		Circuit breakers		Circuit breakers		Circuit breakers		
	Type	Rating In (A)	Type	Rating In (A)	380/400 V	415 V	Type	Rating In (A)	440 V	Type	Rating In (A)
0.37	2	1.8	EZC100	20	1.2	1.1	EZC100	20	1	EZC100	20
0.55	2.8	2.6		20	1.6	1.5		20	1.4		20
0.75	3.5	3.2		20	2	1.8		20	1.7		20
1.1	5	4.5		20	2.8	2.6		20	2.4		20
1.5	6.5	6		20	3.7	3.4		20	3.1		20
2.2	9	8		20	5.3	4.8		20	4.5		20
3	12	11		20	7	6.5		20	5.8		20
4	15	14		20	9	8.2		20	8		20
5.5	21	19		40	12	11		20	10.5		20
7.5	28	25		60	16	14		20	13.7		20
10	36	33		60	21	19		40	19		40
11	39	36		80	23	21		40	20		40
15	52	48		80	30	28		60	26.5		60
18.5	63	59		80	37	34		60	33		60
22	75	70	EZC250	125	43	40		80	39		60
30	100	95		160	59	55	EZC250	125	52		80
37	125	115		250	72	66		150	63	EZC250	125
45	150	140		250	85	80		160	76		150
55	180	170	EZC400	300	105	100		200	90		160
75	250	235		-	140	135		250	125		250
90	300	270		-	170	160	EZC400	300	140		250
110	360	330		-	210	200		350	178	EZC400	300


Thanks to its small size and short-circuit capacity, EasyPact circuit breaker is the most compact solution for any capacitor protection (eg: for each step of capacitor bank from 7.5 kVAR to 50 kVAR).



EZC100.



EZC250.

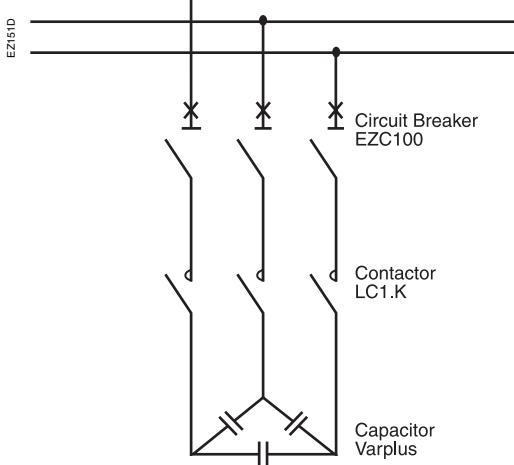

EasyPact circuit breaker is suitable for capacitor protection following the rules below:

■ Inc = Nominal current from the capacitor

$$\text{Inc} = \frac{Q_c}{U\sqrt{3}}$$

Inc = Nominal Current Capacitor (A)
Qc = Reactive power (kVAR)
U = Nominal Voltage (V)

■ Inb = Nominal current for the circuit breaker protection (EZC)

- Inb = 1.36 x Inc for standard equipment
- Inb = 1.5 x Inc for overrated type equipment
- Inb = 1.19 x Inc for detuned type equipment: 3.8 tuning
- Inb = 1.31 x Inc for detuned type equipment: 4.3 tuning
- Inb = 1.12 x Inc for detuned type equipment: 2.7 tuning
- the short-circuit (magnetic) protection-setting thresholds must enable passage of the energising transients: 10 x Inc for standard, overrated and detuned type equipment.
- short-circuit level is given by the installation.

Example:

Table at 400 V AC - 3 phases 50 Hz for standard equipment.

Reactive power (kVAR)	Inc (A)	Inb (A)	Breaking capacity to Circuit Breaker	
			15 kA	30 kA
7.5	11	15	EZC100N3015	EZC100H3015
10	14	20	EZC100N3020	EZC100H3020
15	22	30	EZC100N3030	EZC100H3030
20	29	40	EZC100N3040	EZC100H3040
30	43	60	EZC100N3060	EZC100H3060
40	58	80	EZC100N3080	EZC100H3080
50	72	100	EZC100N3100	EZC100H3100
60	87	118	EZC250F3125	EZC250H3125
75	108	147	EZC250F3150	EZC250H3150
100	144	196	EZC250F3200	EZC250H3200

Guiding

TOOLS

merlin-gerin.com

This international site allows you to access all the Merlin Gerin products in just 2 clicks via comprehensive range data-sheets, with direct links to:

- complete library: technical documents, catalogs, FAQs, brochures...
- selection guides from the e-catalog.
- product discovery sites and their Flash animations.

You will also find illustrated overviews, news to which you can subscribe, the list of country contacts...




Training

Training allows you to acquire the Merlin Gerin expertise (installation design, work with power on, etc.) for increased efficiency and a guarantee of improved customer service. The training catalogue includes beginner's courses in electrical distribution, knowledge of MV and LV switchgear, operation and maintenance of installations, design of LV installations to give but a few examples.




<i>Presentation</i>	6
<i>Circuit breakers</i>	9
<i>Installation guide</i>	47
Introduction	72
Busbars characteristics	74
Main busbars and extension	75
Accessories	76
Busbar EZB250	77
Busbars EZB400/630	78
EasyPact or Compact NS/NB branch extensions layout	79

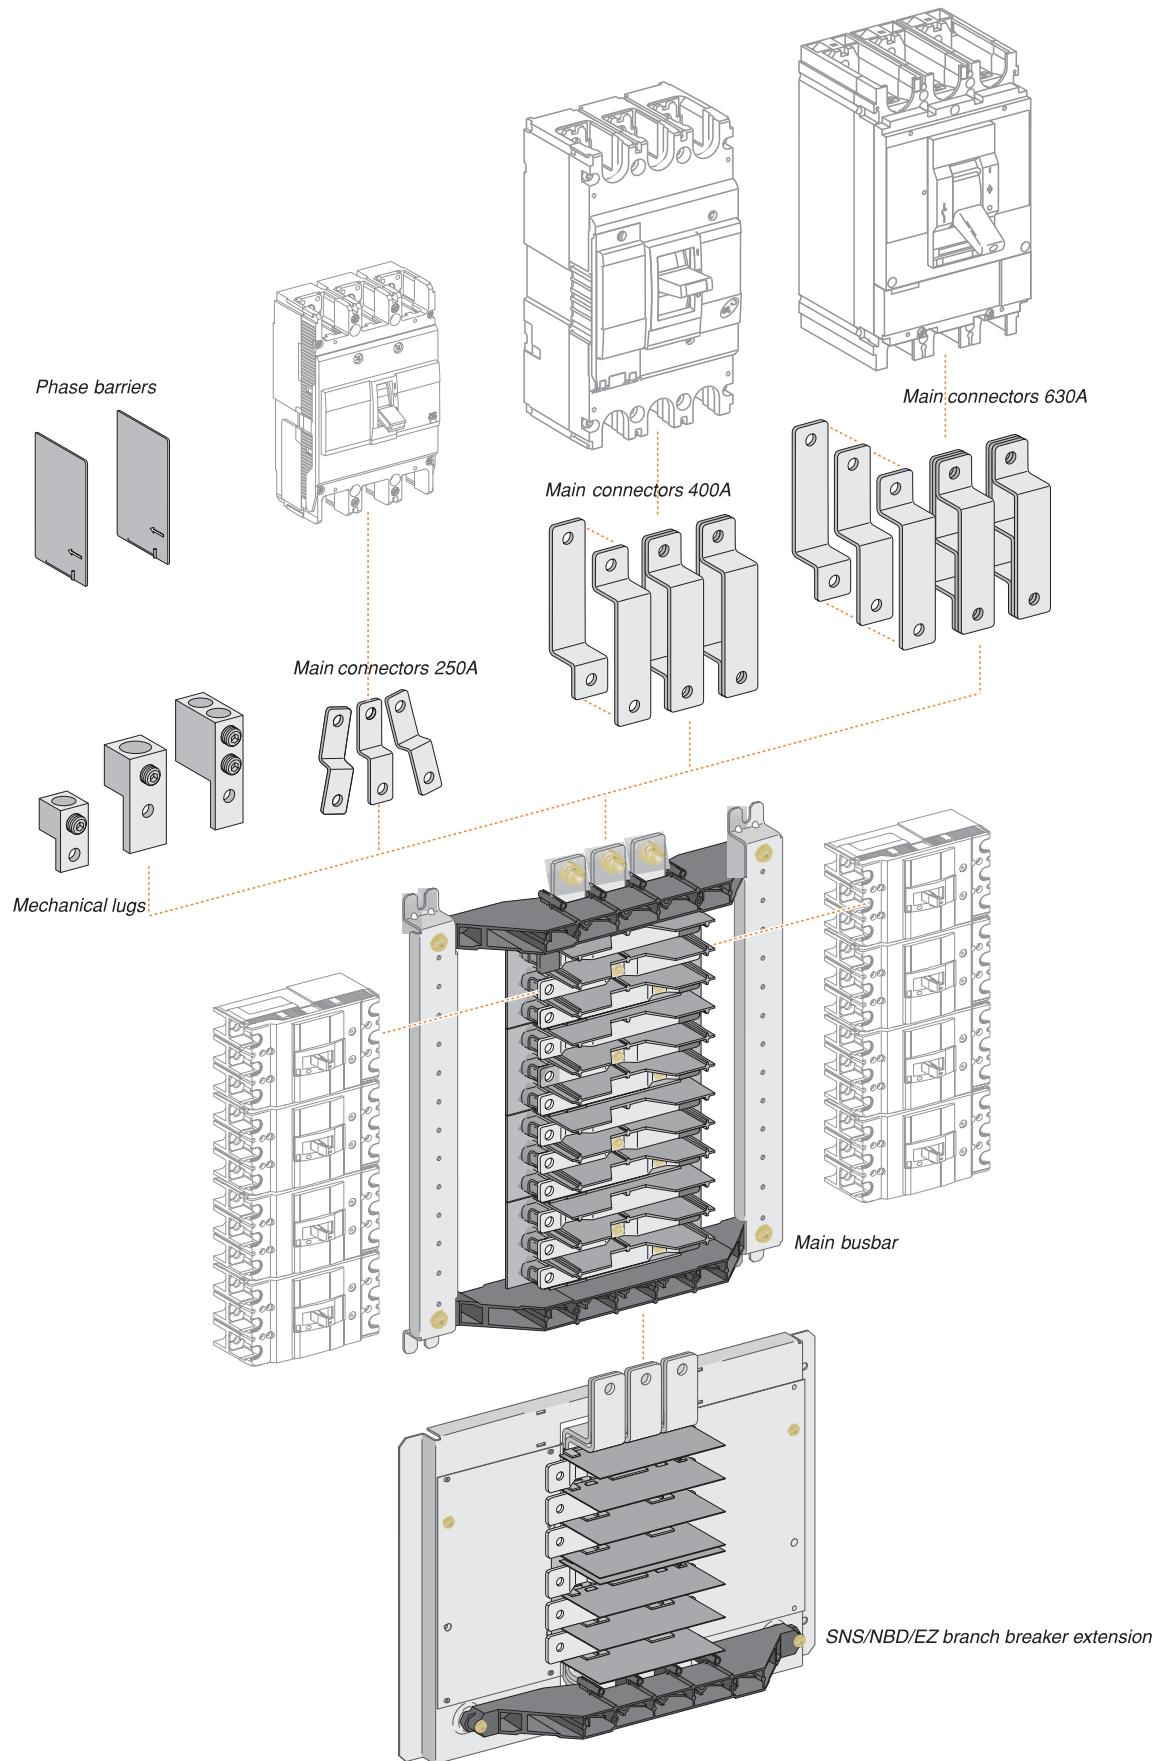

The EasyPact Busbar - engineered and certified together with the EasyPact MCCB to provide superior performance, flexibility and value. Simply the best solution for your distribution panel needs:

- available for 250 A, 400 A or 630 A main incoming current
- available for 4, 6, 8, 10 or 12 Ways (3 poles) EasyPact 100 A (max.) outgoing MCCB's
- 400 A and 630 A systems can accept an additional 2 or 4 EasyPact 250 or Compact NS/NB160/250 A outgoing MCCB's
- designed and tested to meet IEC 60439-1 requirements
- completely assembled in ISO certified facility for easy installation into locally made enclosures.

EZ116P-70

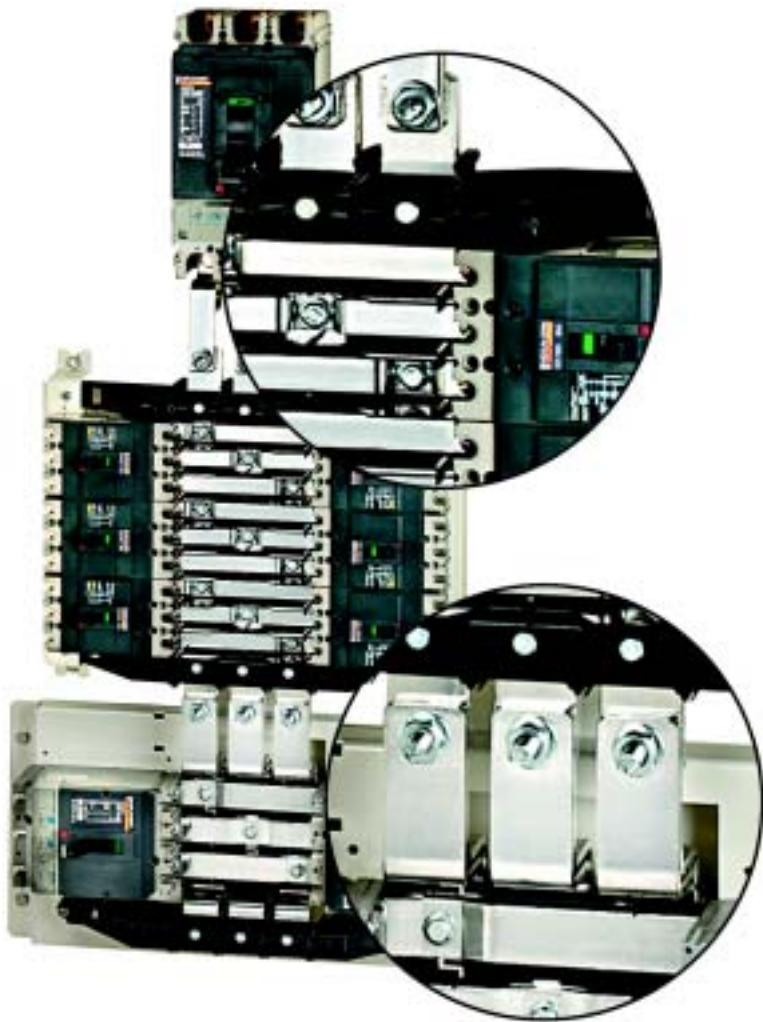

Premium Materials make a premium busbar system

- Solid copper busbars and connectors for cool, care-free operation.
- Electro-tin plating on all busbars and connectors for corrosion resistance in all environments.
- Fiberglass reinforced nylon bus supports for strength and dimensional stability.
- Molded thermoplastic phase barriers to maintain alignment and ensure electrical isolation between phases.
- A nameplate with Schneider Electric on the bottom line - stands for quality and reliability.



Enclosed 10 ways Busbar 250 A with 250 A main incomer.

Compliance with standards


The EasyPact Busbar System is designed and certified to meet all international requirements specified in IEC 60439-1 relating to construction of Low Voltage switchgear and controlgear assemblies, including:

- verification of temperature - rise limits
- verification of dielectric properties
- verification of short-circuit withstand strength
- verification of clearances and creepage distances.

In addition, the system has been type-tested in ASTA labs to confirm the short-circuit and short-time withstand ratings.

EasyPact Busbar System		EZB250					EZB400					EZB630				
Number of outgoing MCCB's EasyPact 100 A (max.)		4 6 8 10 12					4 6 8 10 12					4 6 8 10 12				
		Ways Ways Ways Ways Ways					Ways Ways Ways Ways Ways					Ways Ways Ways Ways Ways				
1P		12	18	24	30	36	12	18	24	30	36	12	18	24	30	36
2P		6	8	12	14	18	6	8	12	14	18	6	8	12	14	18
3P		4	6	8	10	12	4	6	8	10	12	4	6	8	10	12
EZ/NS/NB branch breaker		No extension					Yes (2 or 4 Ways)					Yes (2 or 4 Ways)				
Electrical characteristics																
Rated incoming current (A)		250					400					630				
Rated operational voltage (V) AC 50/60 Hz		550					550					550				
Rated insulation voltage (V)		690					690					690				
Breaking capacity		Refer to cascading tables page 64														
Rated short-time withstand current (kA rms)	1 sec.	30					40					40				
Dimensions																
Dimensions (mm) L x W x D		4 Ways			268.5 x 416 x 82.5			290 x 416 x 107			290 x 416 x 107			290 x 416 x 107		
		6 Ways			343.5 x 416 x 82.5			365 x 416 x 107			365 x 416 x 107			365 x 416 x 107		
		8 Ways			418.5 x 416 x 82.5			440 x 416 x 107			440 x 416 x 107			440 x 416 x 107		
		10 Ways			493.5 x 416 x 82.5			515 x 416 x 107			515 x 416 x 107			515 x 416 x 107		
		12 Ways			568.5 x 416 x 82.5			590 x 416 x 107			590 x 416 x 107			590 x 416 x 107		

EZ149P-80

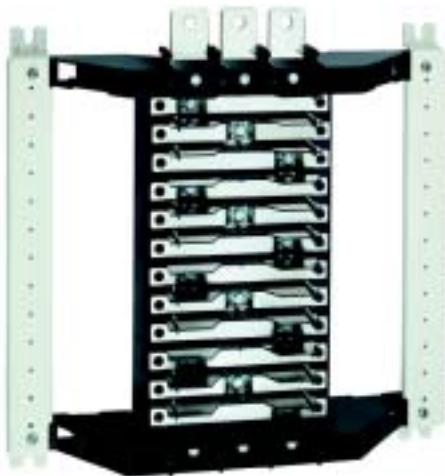


EasyPact Busbar EZB250W08.

Main busbar

The core of the EasyPact Busbar System includes the main busbars and outgoing connectors for EasyPact MCCB's.

Designation	Cat. no.		
Type	EZB250	EZB 400	EZB630
Main busbar current rating	250 A	400 A	630 A
# Branch Ways (3 poles EasyPact MCCB's)			
4 Ways	EZB250W04	EZB400W04	EZB630W04
6 Ways	EZB250W06	EZB400W06	EZB630W06
8 Ways	EZB250W08	EZB400W08	EZB630W08
10 Ways	EZB250W10	EZB400W10	EZB630W10
12 Ways	EZB250W12	EZB400W12	EZB630W12

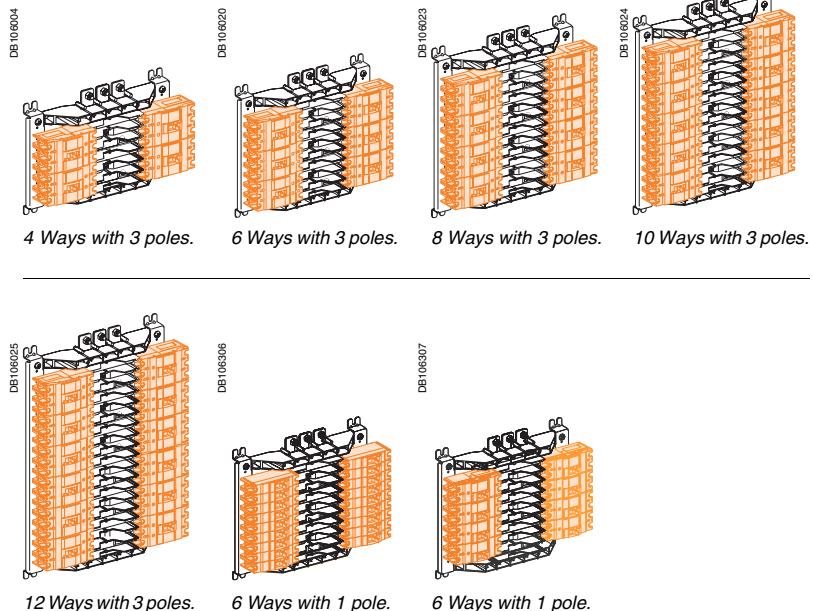**EasyPact and Compact NS/NB branch extension**

For applications calling for larger than 100 A outgoing MCCB's, EasyPact Busbar rated 400 A and 630 A can accept the 2 Ways or 4 Ways EasyPact and Compact NS/NB branch extension for up to four additional 250 A max. outgoing circuits. EasyPact and Compact NS/NB branch extensions simply connect directly to the terminals provided on the EZB400 and EZB630 EasyPact Busbar.

EB8637-60


EasyPact and Compact NS/NB branch breaker extension
2 Ways.

Designation	Cat. no.
EZ/NS/NB branch breaker extention	
2 Ways	EZBNS2
4 Ways	EZB2NS2

E88301-50



EZ117P-60

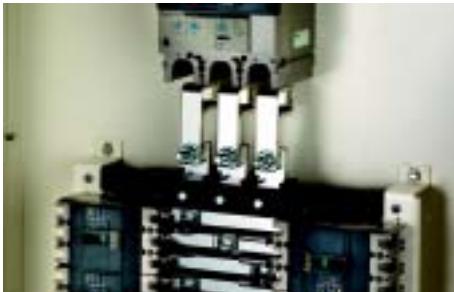

E88309-50




E88310-54



Main incoming connections

Incoming cables with crimped lugs can connect directly to the terminals provided.

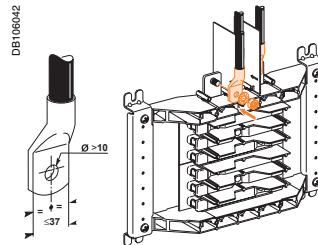

Main connectors

For installing a main disconnect device (EasyPact or Compact NS/NB MCCB or INS switch) ahead of EasyPact Busbar, use the tin-plated copper connector kits below.

Designation	Cat. no.		
Main Busbar current rating	250 A	400 A	630 A
Main disconnect device for EasyPact or Compact NS/NB or INS switch	EZB250MCNS	EZB400MCNS	EZB630MCNS

Mechanical lugs

For incoming cables without crimped lugs, use the mechanical lug kits below. Each kit contains three aluminium lugs suitable for copper or aluminium cables.


Designation	Cat. no.																							
Main Busbar current rating	250 A	400 A	630 A																					
Incoming cable size	16-150 mm ²	35-300mm ²	25-240 mm ² 2 cables per phase																					
Lug kit	EZB250MLUG EZB400MLUG EZB630MLUG																							
			<table border="1"> <tr> <td>A</td> <td>B</td> <td>C</td> </tr> <tr> <td>250 A</td> <td>400 A</td> <td>630 A</td> </tr> <tr> <td>a</td> <td>Ø</td> <td>⌚</td> </tr> <tr> <td>A</td> <td>26</td> <td>31 Nm</td> </tr> <tr> <td>B</td> <td>35</td> <td>56 Nm</td> </tr> <tr> <td>C</td> <td>30</td> <td>56 Nm</td> </tr> <tr> <td></td> <td>60</td> <td>56 Nm</td> </tr> </table>	A	B	C	250 A	400 A	630 A	a	Ø	⌚	A	26	31 Nm	B	35	56 Nm	C	30	56 Nm		60	56 Nm
A	B	C																						
250 A	400 A	630 A																						
a	Ø	⌚																						
A	26	31 Nm																						
B	35	56 Nm																						
C	30	56 Nm																						
	60	56 Nm																						

Connector caps

Connector caps are available to isolate the ends of connectors in positions where branch breakers are not installed.


Mounting screws are provided for an insulating barrier (locally provided) to cover the branch connectors when IP2X finger safety is specified.

Designation	Cat. no.		
Connector caps (set of 3)			
EasyPact branch MCCB	EZB100CAP		
EasyPact or Compact NS/NB branch MCCB	EZB250CAP		

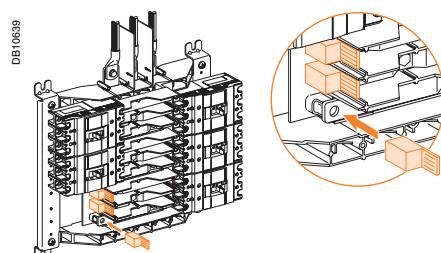


Layout installation EZB250

Panel layout using the EasyPact Busbar is simple using the guides below. In addition to the mounting locations for the busbar and main disconnect components (if required), make note of the minimum clearances required to the top, bottom and sides of the enclosure.

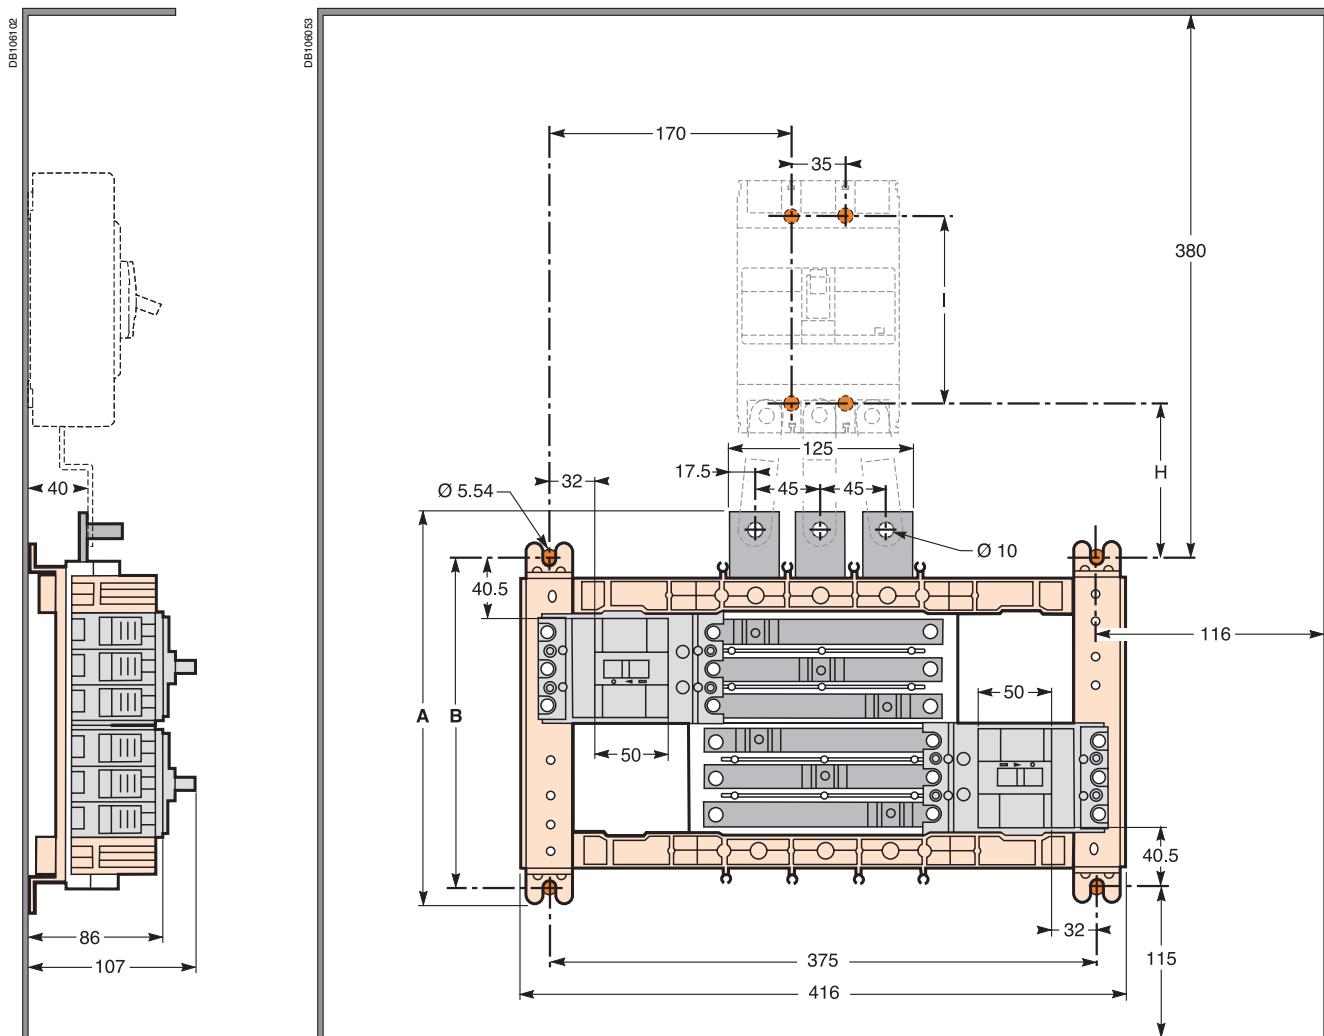


EZB250 - 250 A main busbar rating.

Trim cut-out

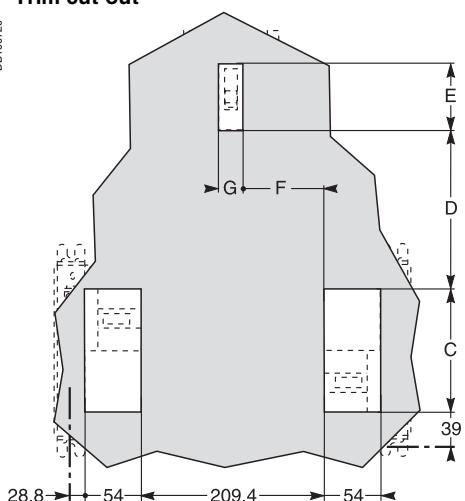


	A	B	C	D	E	F	G	H	I
EZ250 incomer	-	-	-	187.4	52	92.7	24	109.5	126
NS/NB incomer	-	-	-	182.4	76	90.2	29	108	125
4 ways	268.5	225	147	-	-	-	-	-	-
6 ways	343.5	300	222	-	-	-	-	-	-
8 ways	418.5	375	297	-	-	-	-	-	-
10 ways	493.5	450	372	-	-	-	-	-	-
12 ways	568.5	525	447	-	-	-	-	-	-

Layout installation EZB400/630

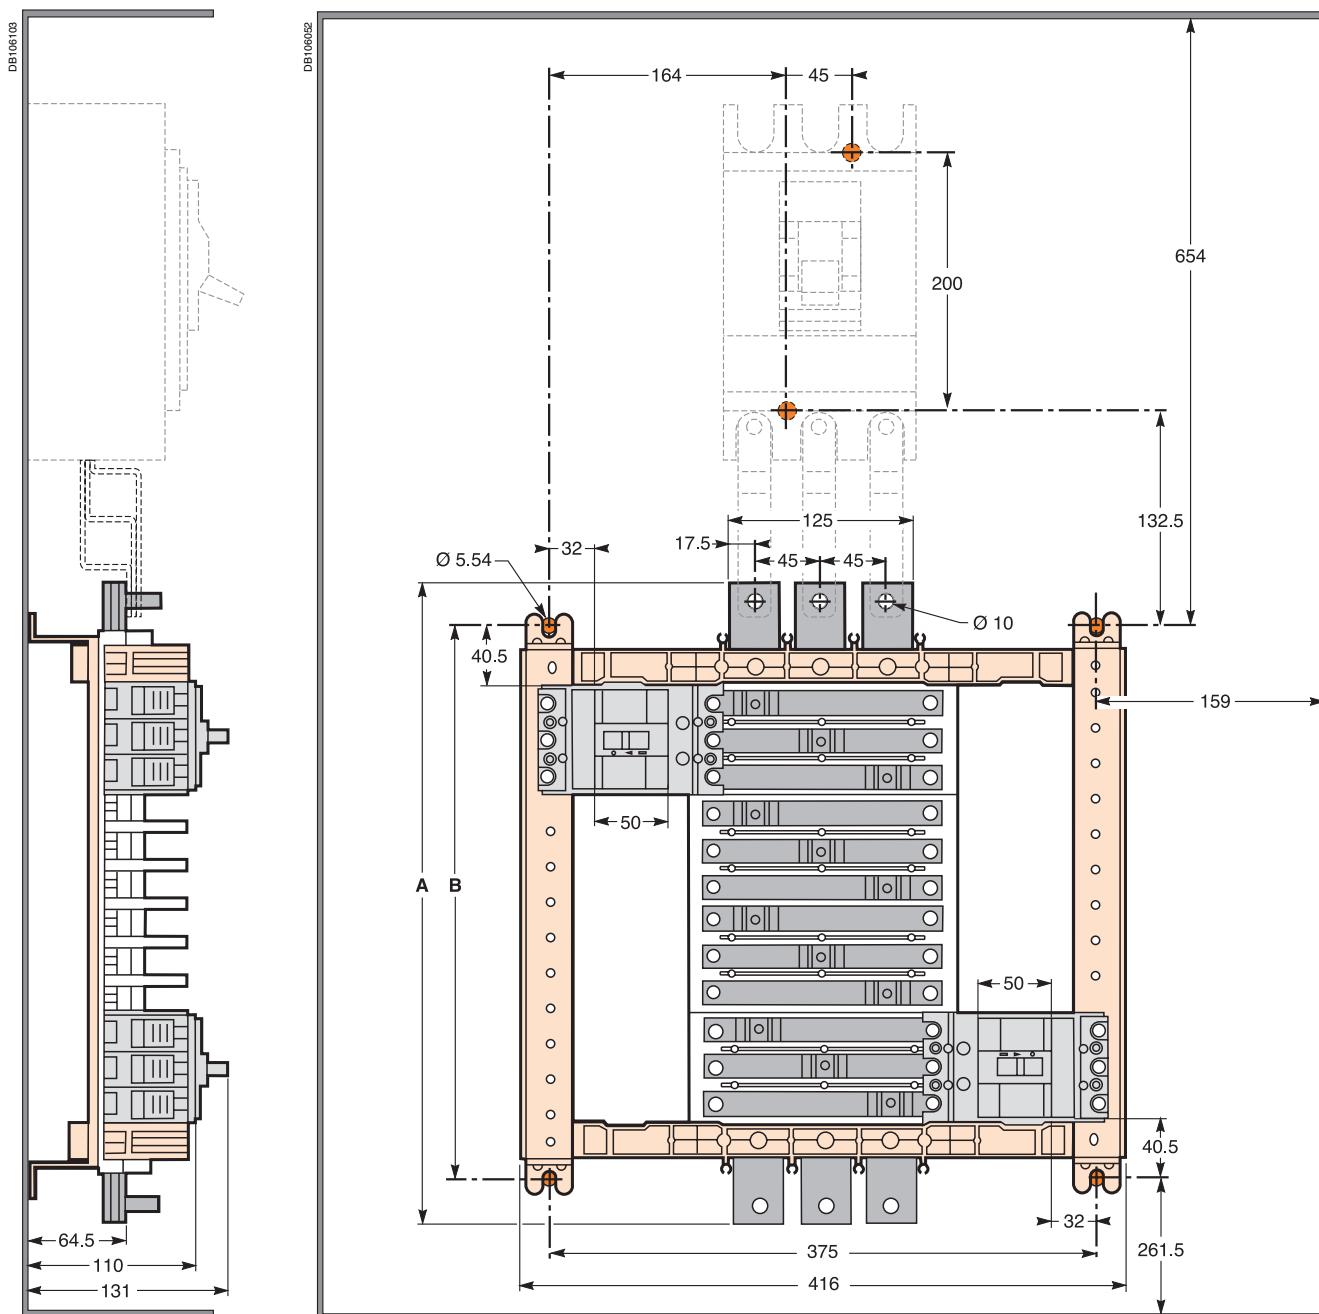

EZB400 and EZB630 - 400 A and 630 A main busbar ratings.

Trim cut-out

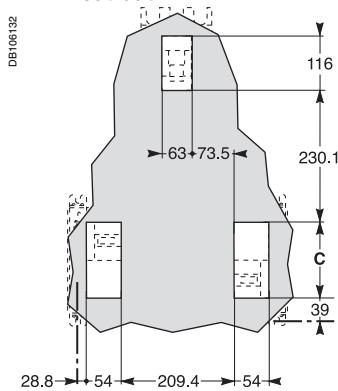


	A	B	C
4 ways	290	225	147
6 ways	365	300	222
8 ways	440	375	297
10 ways	515	450	372
12 ways	590	525	447

Note: to avoid excess temperature rise on incoming MCCB terminals, panels using 630 A main breaker with these minimum enclosure dimensions require a 7000 mm² ventilation opening (after subtracting effects of screening) at each of the 4 corners of the enclosure.

Dimensions

EasyPact or Compact NS/NB branch extensions layout


Layout installation for EasyPact or Compact NS/NB branch extensions

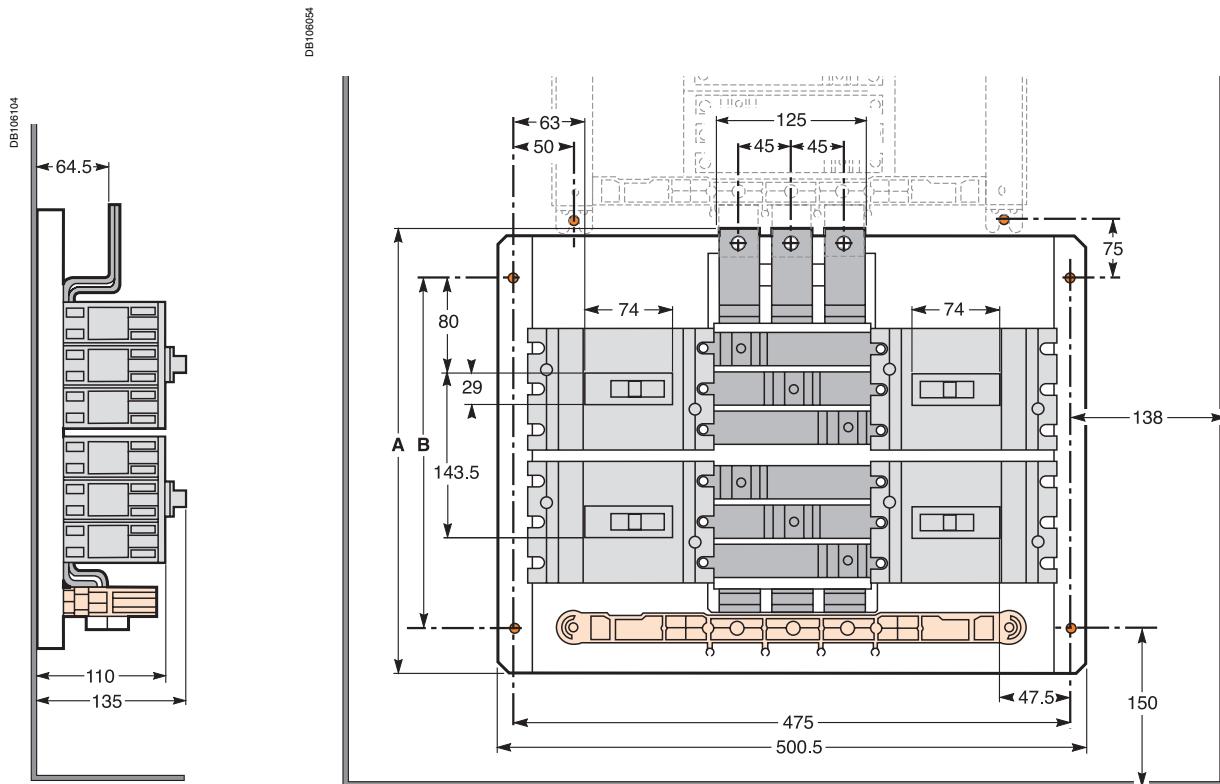

EZBNS2 and EZBNS4 Compact NS/NB branch breaker extension;

	A	B	C	D	E	F	G	H
EZBNS2	270	175	NA	-	-	-	-	-
EZBNS4	384	275	85.5	-	-	-	-	-
EZC250	-	-	90.5	57.5	24	61	52	249
NS/NB250	-	-	85.5	78.5	29	45.5	76	232

Trim cut-out

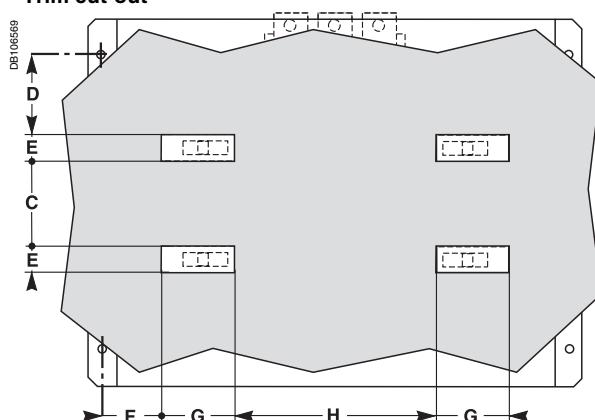

Guiding

TOOLS

merlin-gerin.com

This international site allows you to access all the Merlin Gerin products in just 2 clicks via comprehensive range data-sheets, with direct links to:

- complete library: technical documents, catalogs, FAQs, brochures...
- selection guides from the e-catalog.
- product discovery sites and their Flash animations.

You will also find illustrated overviews, news to which you can subscribe, the list of country contacts...



The electrical installation guide

According to IEC 60364

This guide, part of the Guiding System, is the essential tool to "guide" you any time in your business:

- design office, consultant
- contractor, panelbuilder
- teacher, trainer.

Comprehensive and concrete information on:

- all the new technical solutions
- all the components of an installation from a global point of view
- all the IEC standards modifications
- all the fundamental electrotechnical knowledge
- all the design stages, from medium to low voltage.





Schneider Electric Industries SAS

89, boulevard Franklin-Roosevelt
F - 92500 Rueil-Malmaison (France)
Tel : +33 (0)1 41 29 85 00

<http://www.schneider-electric.com>
<http://www.merlin-gerin.com>

ABTED206158EN

As standards, specifications and designs change from time to time, please ask for confirmation of the information given in this publication.



Printed on recycled paper.

Publication: Schneider Electric
Photos: Schneider Electric
Printing: Ingoprint - made in Spain